



DEMI

felt wall






HOW TO SPECIFY

Demi brings texture and dimension to your space. The precise nature of each rounded ridge adds contrast, revealing confidence and an innovative spirit, while also reducing unwanted noise and echo within the workspace.


Available in suggested colorways or any combination of 30 colors and textures. Demi is offered in a standard module dimension, with custom sizes also available.

01 SPECS

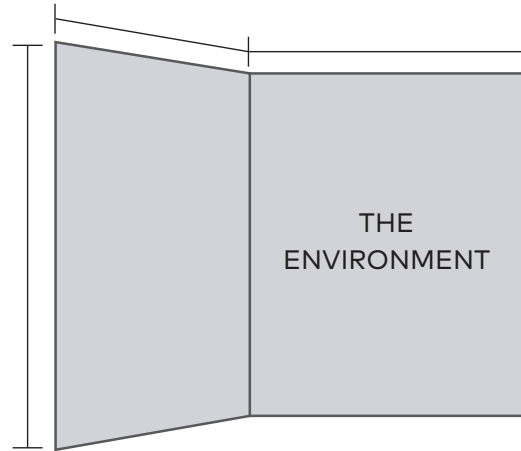


Tell us about your space, the design, and dimensions.

02 COLORS

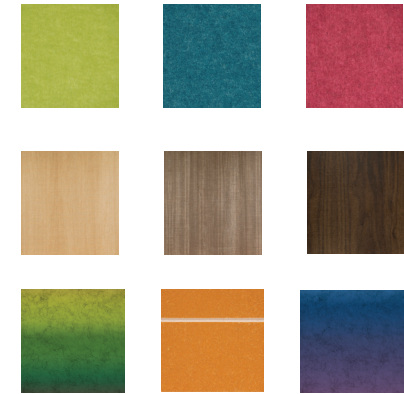

Standard. Woodgrains. Customs. What's your color? (See page 5)

03 MAKE IT YOUR OWN!

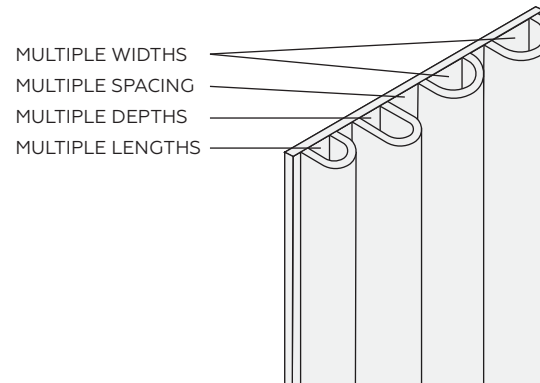

Spec your own slat size, spacing, and more.

SHADES by MPS



Spec your own color, gradient, or woodgrain. (See page 5)




PRODUCT SPECIFICATIONS

STANDARD DIMENSIONS

Single Panel 23"W x 119"H

Felt Thickness 2"

- Choose from standard or custom colors
- 100% polyester fiber acoustic panel
- Measurably improves acoustic privacy
- Sound absorption and blocking
- Ambient noise reduction within the room
- Reduced reverberation and echo
- Easily disinfected and cleaned
- Easily installed

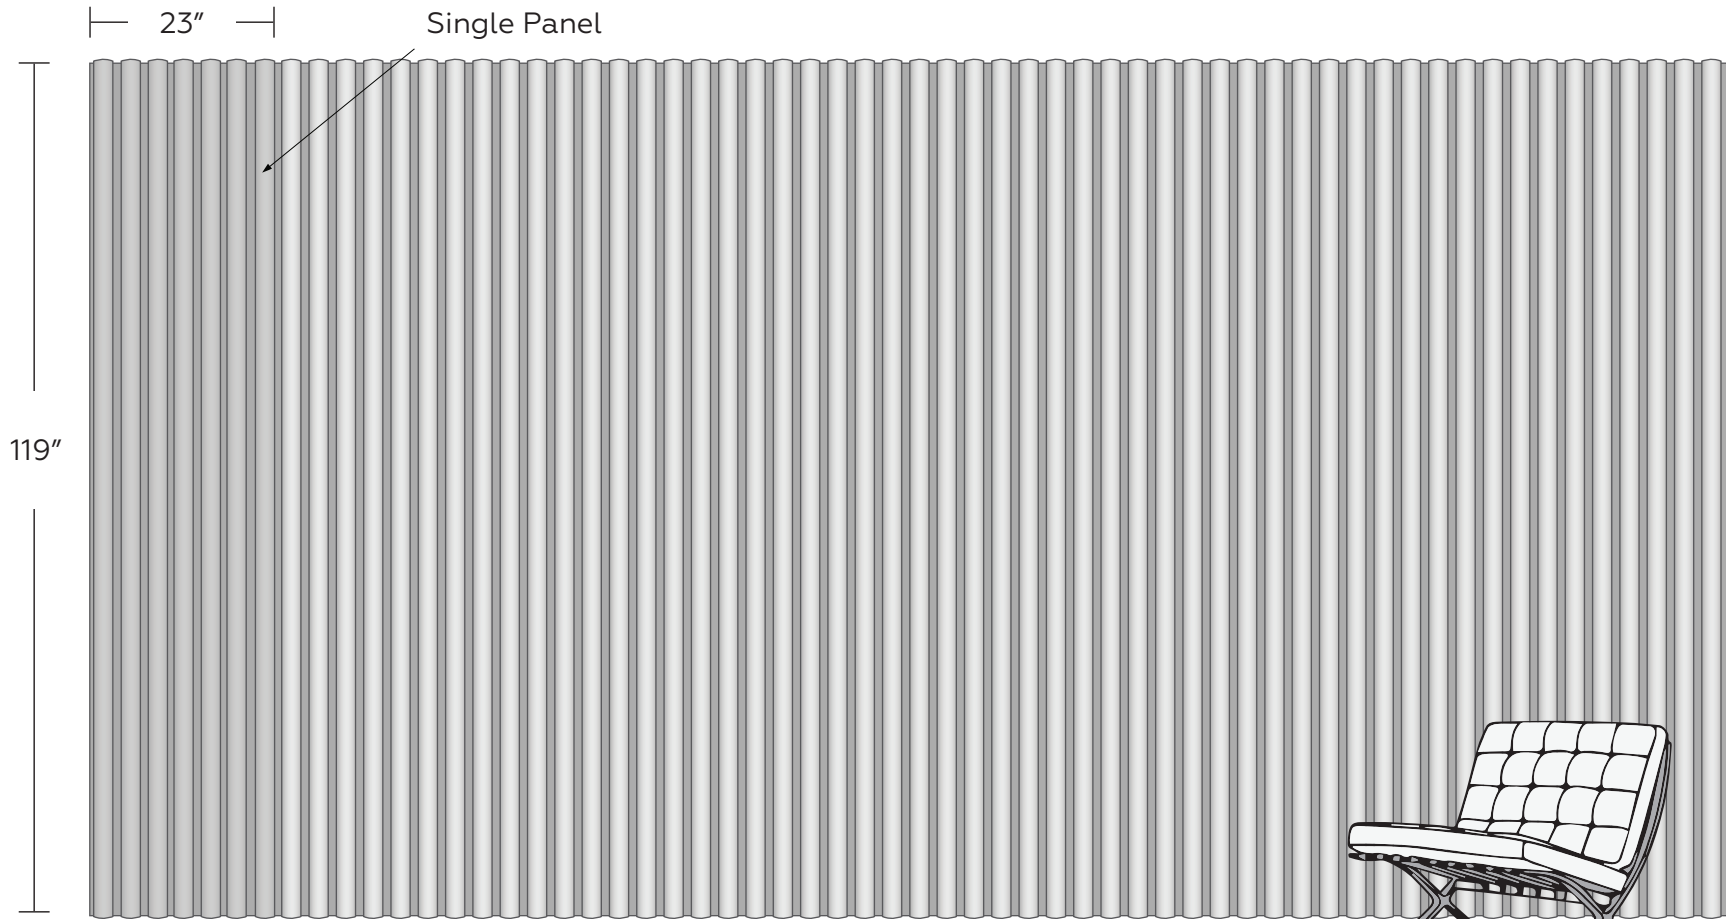

*Customize width using 23" standard panels



TECHNICAL SPECIFICATIONS



Absorption

Standard: .85 NRC

(subject to mounting conditions)

Fire Rating

ASTM E84 Class A

Warranty

Two (2) Years

VOC

ASTM D5116 Compliant

Material

100% PET acoustic felt

Maintenance

Vacuum clean to remove dust and debris

Sustainability

MPS 9mm Acoustic Panels
MPS LLC

Final Assembly: Trenton, Texas, USA
Life Expectancy: 50 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program (Trenton, TX), Recyclable (100%)

Ingredients:

MPS 9mm PET: Polyethylene Terephthalate

Living Building Challenge Criteria: Compliant

I-13 Red List:

- LBC Red List Free % Disclosed: 100% at 100ppm
- LBC Red List Approved VOC Content: Not Applicable
- Declared

I-10 Interior Performance: CDPH Standard Method v1.2-2017
I-14 Responsible Sourcing: Not Applicable

MPS-0001
EXP. 01 NOV 2025
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare





COLORS & WOODGRAINS

MPS offers a range of standard colors, woodgrains, and custom colors with SHADES.


STANDARD COLORS



WOODGRAINS



SHADES by MPS

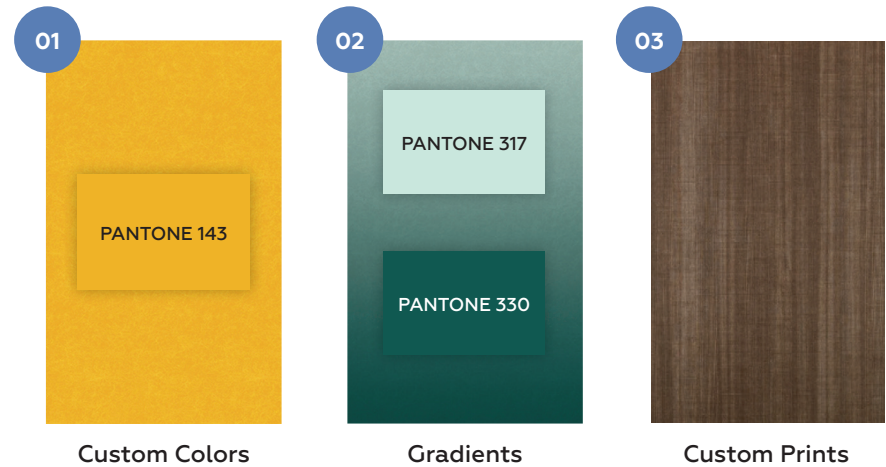

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. SHADES offers Pantone options, full-color prints, and unique gradients. Flat or Heathered? Your choice.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.



PRODUCT INSTALLATION

TOOLS REQUIRED



Cutting tool



Steel straightedge





Drill



Screws

DRY FIT

Before screwing in backer, dry fit the first panel to the wall.

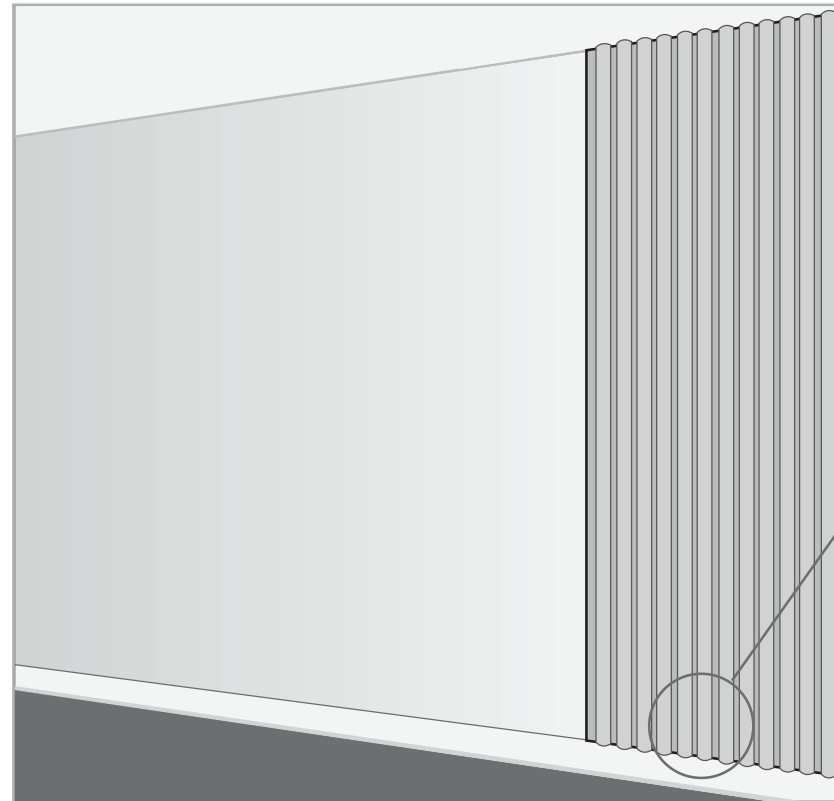

Note: to avoid irregularity, we recommend applying to the top of a baseboard.



PRODUCT INSTALLATION

MOUNT WITH SCREWS

Screw the backer panel and enhancers to the wall, then attach the Demi slats.

