

FIN MURAL







HOW TO SPECIFY

Fin Mural is your dynamic art canvas. Use our color palette to create custom acoustic artwork.

Each slat is a design brush stroke meant to convey a message – what's yours?

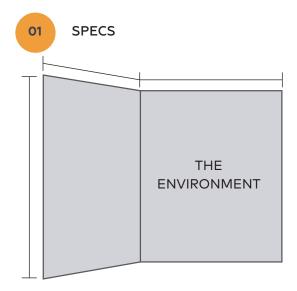

Tell us about your space, the design, and dimensions.



SLAT STYLE

Fin comes in two standard styles.

Get it angled or straight.

03 COLORS







Standard. Woodgrains. Customs. What's your color? (See page 6)

04 MAKE IT YOUR OWN!



Spec your own mural design.

SHADES by MPS



Spec your own color, gradient, or woodgrain. (See page 6)




PRODUCT SPECIFICATIONS

STANDARD DIMENSIONS

Single Panel 23"W x 119"H

Felt Thickness 2"

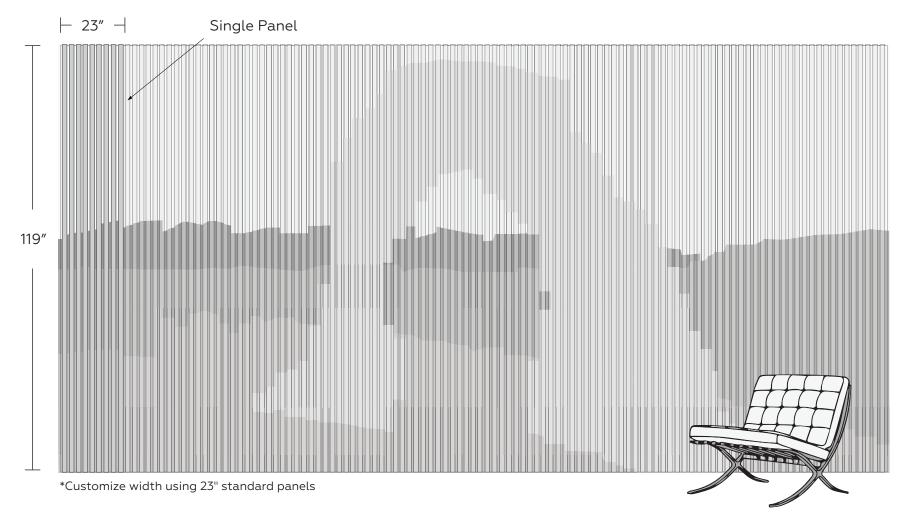



PRODUCT SPECIFICATIONS

CONNECTION


Backer panel is screwed to the wall.

Each slat hooks into slots on backer panel.


ADDITIONAL OPTIONS

Configurations: Straight or angled slats.

ACOUSTIC ENHANCERS

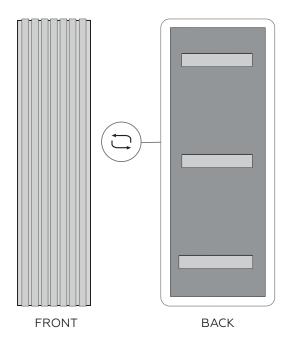

SLAT STYLE

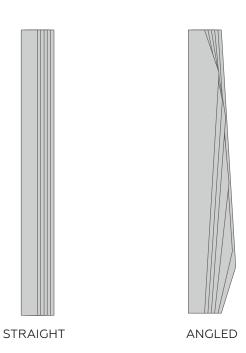



TECHNICAL SPECIFICATIONS



Absorption

Standard: .85 NRC

(subject to mounting conditions)

Fire Rating

ASTM E84 Class A

Warranty

Two (2) Years

VOC

ASTM D5116 Compliant


Material

PET Felt: 100% polyester fiber

Maintenance

Vacuum clean to remove dust and debris

Sustainability

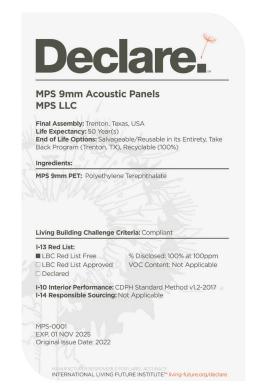















COLORS & WOODGRAINS

MPS offers a range of standard colors, woodgrains, and custom colors with SHADES.


STANDARD COLORS



WOODGRAINS



SHADES by ${\mathbb E} MPS$

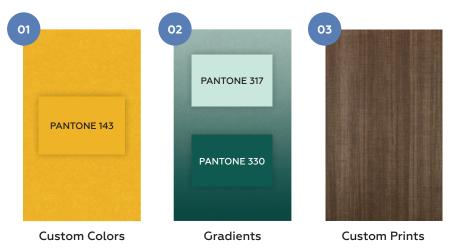

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. SHADES offers Pantone options, full-color prints, and unique gradients. Flat or Heathered? Your choice.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.



MOUNTING OPTIONS

TOOLS REQUIRED



Cutting tool

Steel straightedge




Drill



Screws

DRY FIT

Before screwing in backer, dry fit the first panel to the wall.

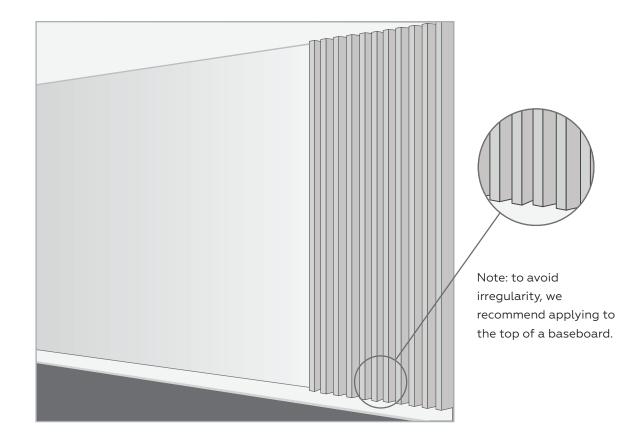



MOUNTING OPTIONS

MOUNTING FIN MURAL

Screw the backer panel and enhancers to the wall, then hook the Fin Mural slats into the slots.

