



GRADI

ceiling grid tiles





INSTALLATION GUIDELINES

Gradi Acoustic Ceiling Grid Tiles are easy to install. Each tile should be leveled and mounted to the ceiling using included screws or magnets.

Installers should rely upon their own professional experience and understanding of their unique requirements to ensure a successful install.

TOOLS REQUIRED



Drill




Screws (provided by MPS)



Magnets (provided by MPS)

INCLUDED

Quantity and size tiles specific to your project.

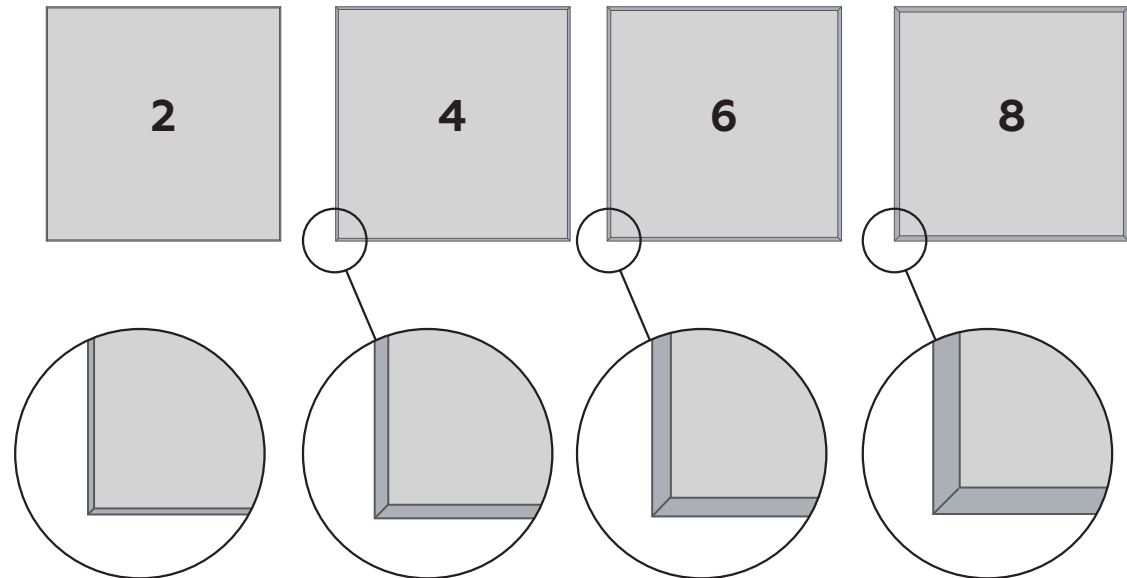

*Upward view of tiles showing taper across different depths




INSTALLATION GUIDELINES

DROP-IN TILES ON 15/16" T-GRID

Replace ceiling tiles with Gradi by dropping the tiles in and hooking them to the lip of the opening.

*Compatible with 15/16" t-grid.

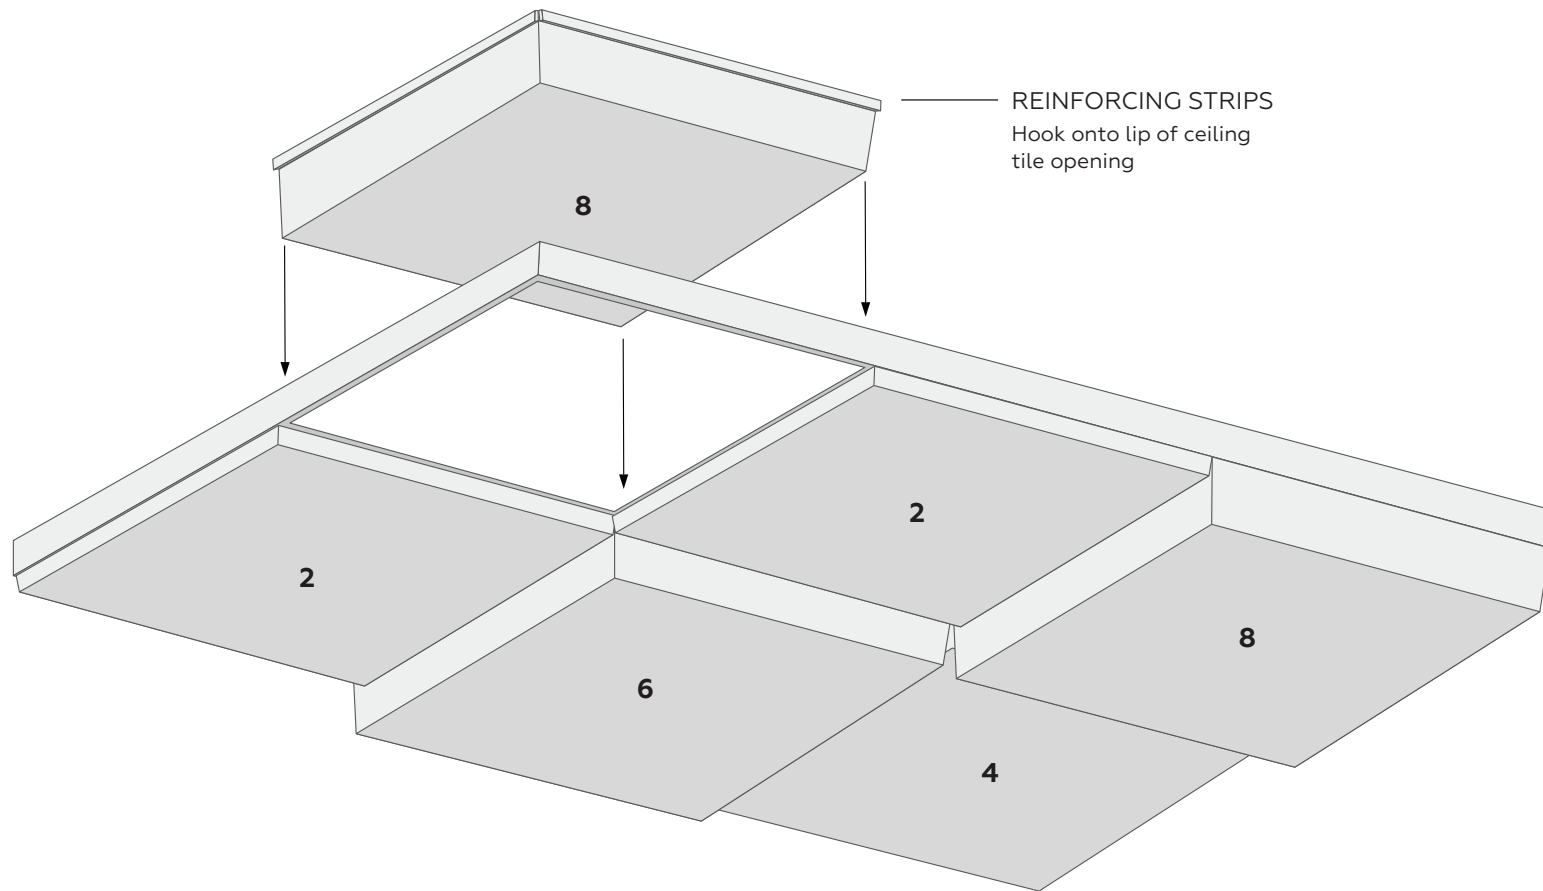



INSTALLATION GUIDELINES


ATTACH MAGNETS AND CONNECT TILES TO 15/16" T-GRID

1. Screw magnets into the tabs on each Gradi tile.
2. Connect the tiles to the 15/16" t-grid ceiling in the desired arrangement.

Note: Pull off of 50lbs per magnet.



Magnet

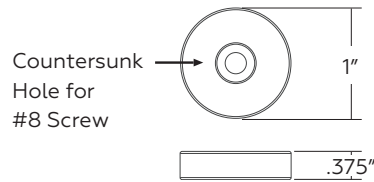

Countersunk Hole for #8 Screw

