



# PRISM

felt wall






# HOW TO SPECIFY

Combine artistry and functionality with Prism. The precision-cut slats effectively absorb sound, creating a more peaceful atmosphere while adding style to any space. Reduce unwanted noise and echo with Prism acoustic felt walls.


Available in ombrés, standard colors, woodgrains, and custom colors with SHADES by MPS.

## 01 SPECS

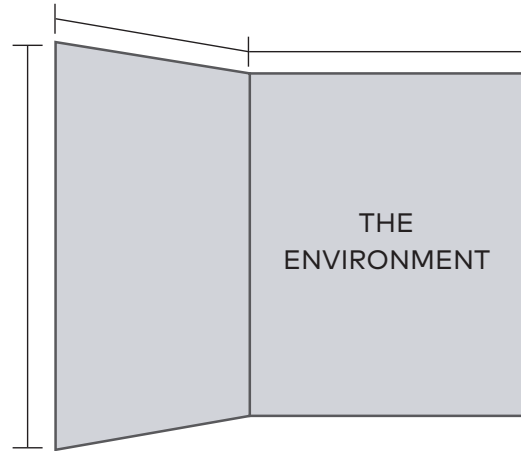


Tell us about your space, the design, and dimensions.

## 02 COLORS

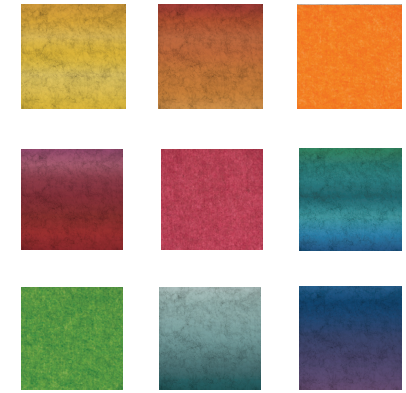

Standards. Woodgrains. Customs. What's your color? (See page 6)

## 03 MAKE IT YOUR OWN!

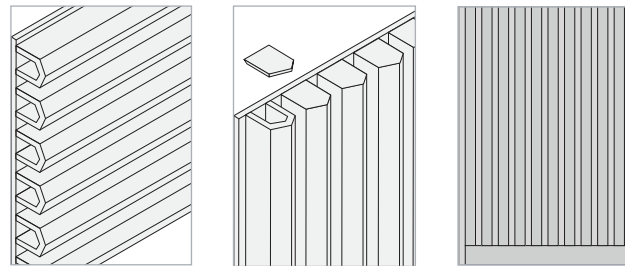

Spec your own slat size and orientation. Add end caps and/or ledge pieces. (See page 4)

### SHADES by MPS



Spec your own color, gradient, or woodgrain. (See page 6)




# PRODUCT SPECIFICATIONS

## STANDARD DIMENSIONS

Single Panel            23"W x 119"H

Felt Thickness        2"

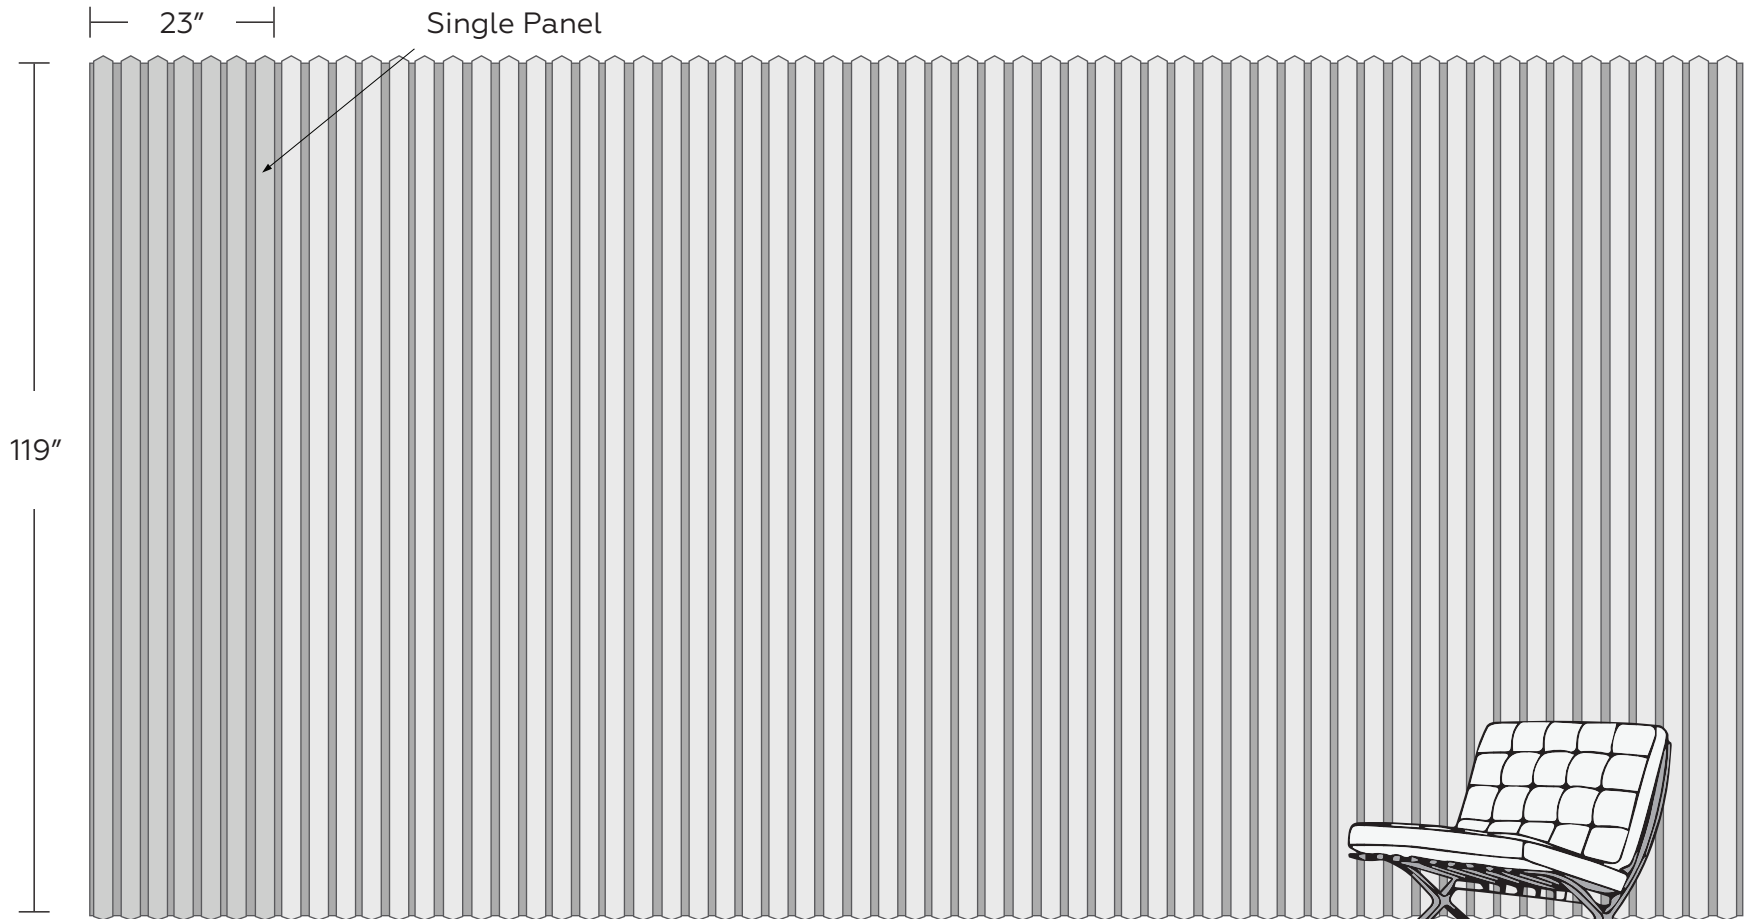

\*Customize width using 23" standard panels





# PRODUCT SPECIFICATIONS

## CONNECTION


Screws concealed by slats.

## ADDITIONAL OPTIONS


End Caps: Finished mitered end caps to conceal stand-offs.

Ledge Pieces: Mitered back panel folded return edge to conceal stand-offs.


## PRISM PANEL

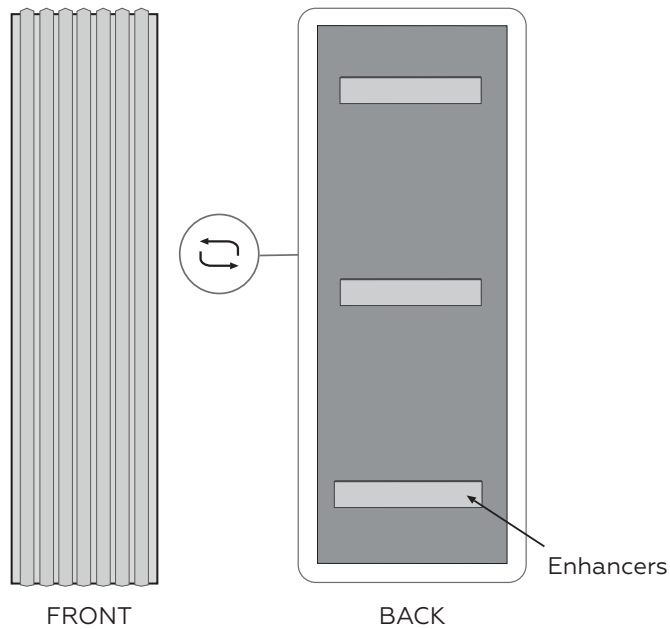

## END CAPS

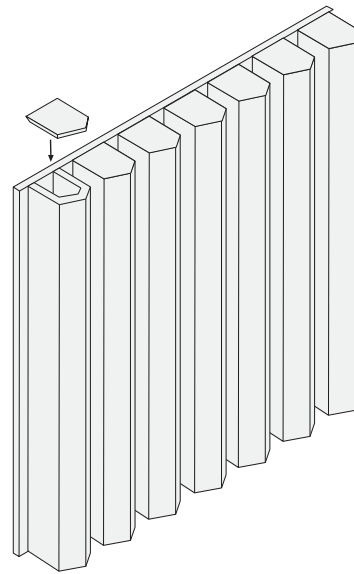

## LEDGE PIECES

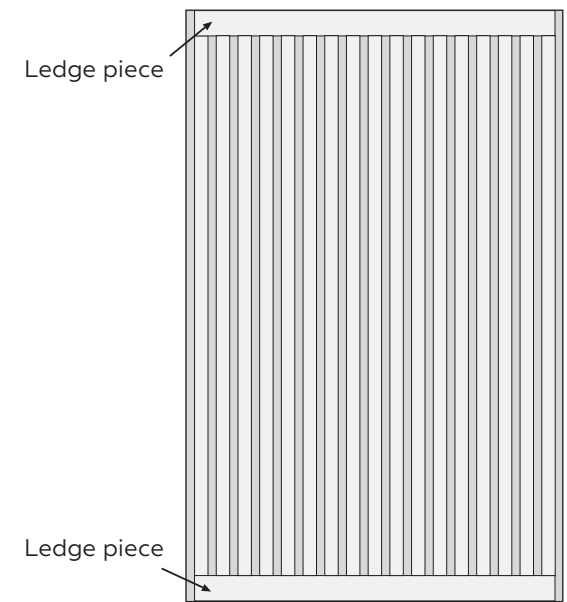



# TECHNICAL SPECIFICATIONS



## Absorption

Standard: .85 NRC

(subject to mounting conditions)

## Fire Rating

ASTM E84 Class A

## Warranty

Two (2) Years

## VOC

ASTM D5116 Compliant

## Material

100% PET acoustic felt

## Maintenance

Vacuum clean to remove dust and debris

## Sustainability

**MPS 9mm Acoustic Panels**  
**MPS LLC**

**Final Assembly:** Trenton, Texas, USA  
**Life Expectancy:** 50 Year(s)  
**End of Life Options:** Salvageable/Reusable in its Entirety, Take Back Program (Trenton, TX), Recyclable (100%)

**Ingredients:**  
**MPS 9mm PET:** Polyethylene Terephthalate

**Living Building Challenge Criteria:** Compliant

**I-13 Red List:**  
 LBC Red List Free      % Disclosed: 100% at 100ppm  
 LBC Red List Approved      VOC Content: Not Applicable  
 Declared

**I-10 Interior Performance:** CDPH Standard Method v1.2-2017  
**I-14 Responsible Sourcing:** Not Applicable

MPS-0001  
EXP. 01 NOV 2025  
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)






# COLORS & WOODGRAINS

MPS offers a range of standard ombrés, colors, woodgrains, and custom colors with SHADES.

## STANDARD OMBRÉS

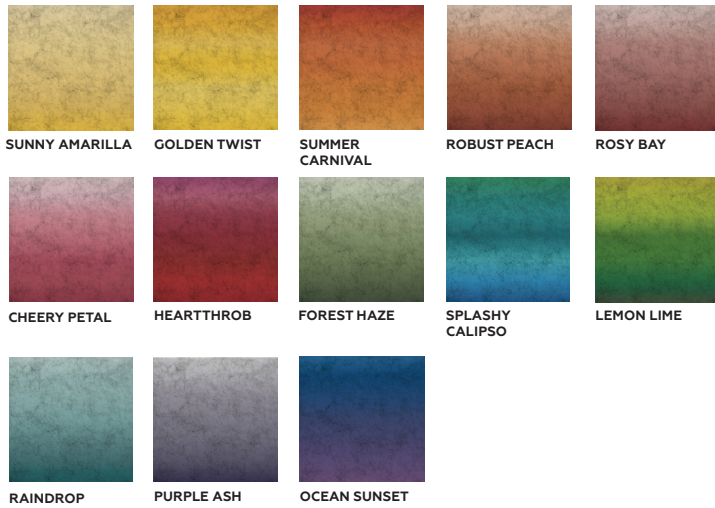

## SHADES by MPS



Your design world revolves around color, so don't be limited by standard colors and outdated palettes. SHADES offers Pantone options, full-color prints, and unique gradients. Flat or Heathered? Your choice. \*Some limitations apply. Consult your MPS acoustics expert to discuss your project.

## STANDARD COLORS



## WOODGRAINS





# MOUNTING OPTIONS

## TOOLS REQUIRED



Cutting tool



Steel straightedge





Drill



Screws

## DRY FIT

Before screwing in backer, dry fit the first panel to the wall.

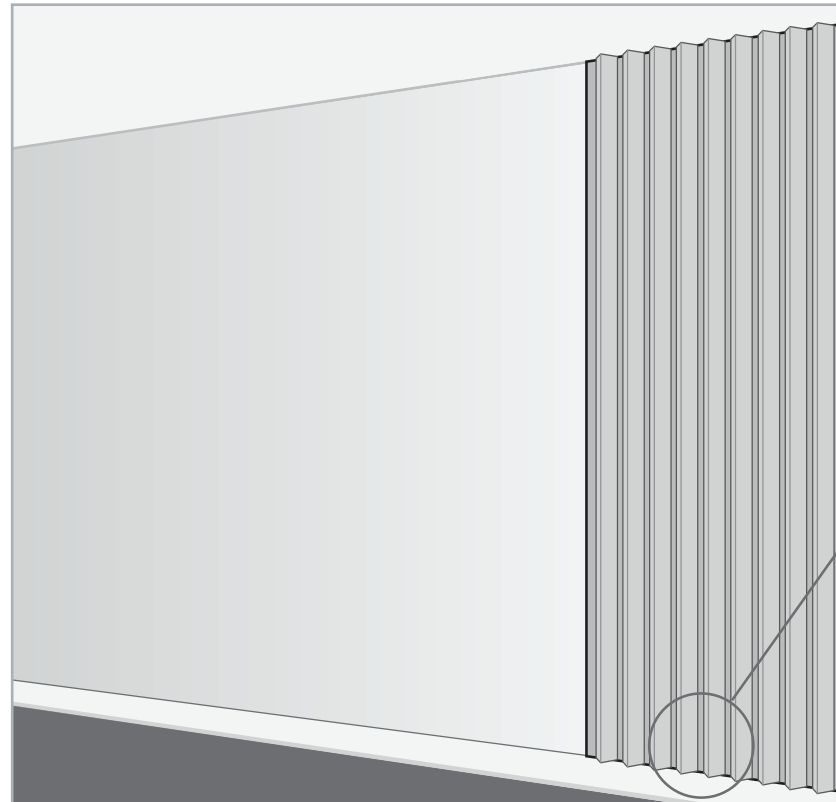

Note: to avoid irregularity, we recommend applying to the top of a baseboard.



# MOUNTING OPTIONS

## MOUNT WITH SCREWS

Screw the backer panel to the wall, ensuring that each screw is drilled through the horizontal acoustic enhancers that are on the back side of each backer panel.

