



TRAK

felt wall






HOW TO SPECIFY

To ensure you get the most out of your space with Trak, follow this comprehensive guide on how to specify your acoustic felt wall.

Whether you're an architect, designer, or facilities manager, this guide will walk you through the key considerations to tailor these panels to your unique needs.

01 SPECS

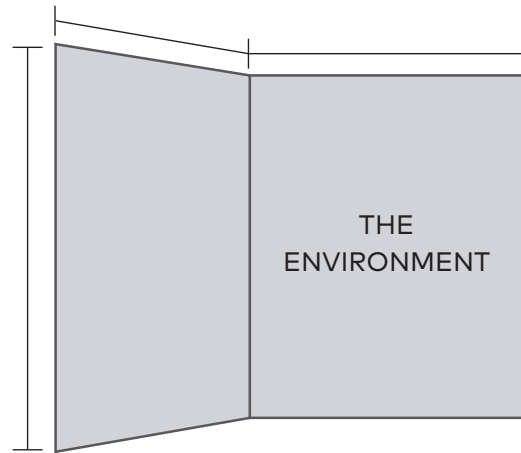


Tell us about your space, the design, and dimensions.

02 PROFILES




What profile does your design call for? Trak is offered in eight unique finishes.

03 COLORS

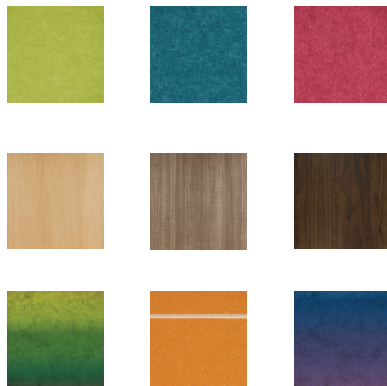

Standard. Woodgrains. Customs.
What's your color? (See page 7)

04 MAKE IT YOUR OWN!



Get it curved



Choose your spacing

Choose your angle

Customize your profile

SHADES by MPS™



Spec your own color, gradient, or woodgrain. (See page 7)




PRODUCT SPECIFICATIONS

STANDARD DIMENSIONS

Single Panel 23"W x 119"H

Felt Thickness 3/8"

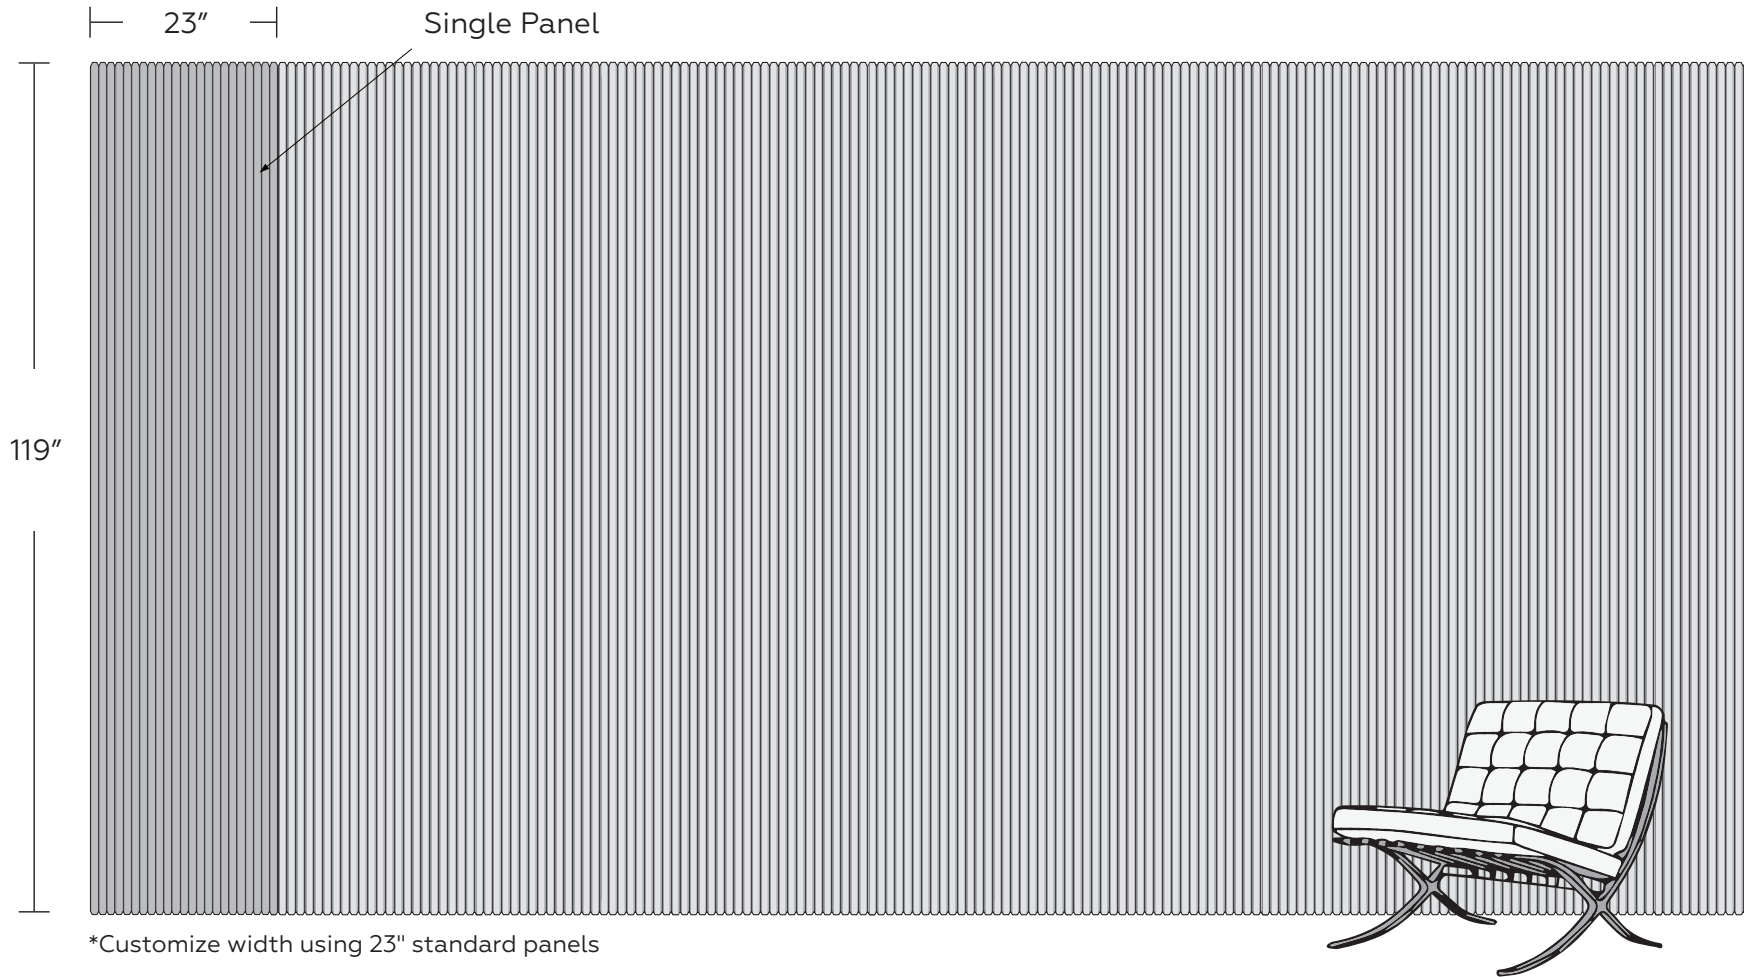

*Customize width using 23" standard panels



PRODUCT SPECIFICATIONS

PROFILES



1. 45 Degrees $\frac{1}{8}$ x $\frac{1}{8}$ " Deep



2. 30 Degrees $\frac{1}{8}$ x $\frac{1}{8}$ " Deep



3. 45 Degrees $\frac{1}{2}$ x $\frac{1}{8}$ " Deep



4. 30 Degrees $\frac{1}{2}$ x $\frac{1}{8}$ " Deep



5. 45 Degrees $\frac{23}{32}$ x $\frac{1}{8}$ " Deep





6. 30 Degrees $\frac{23}{32}$ x $\frac{1}{8}$ " Deep




7. 45 Degrees 1" x $\frac{1}{8}$ " Deep




8. 30 Degrees 1" x $\frac{1}{8}$ " Deep

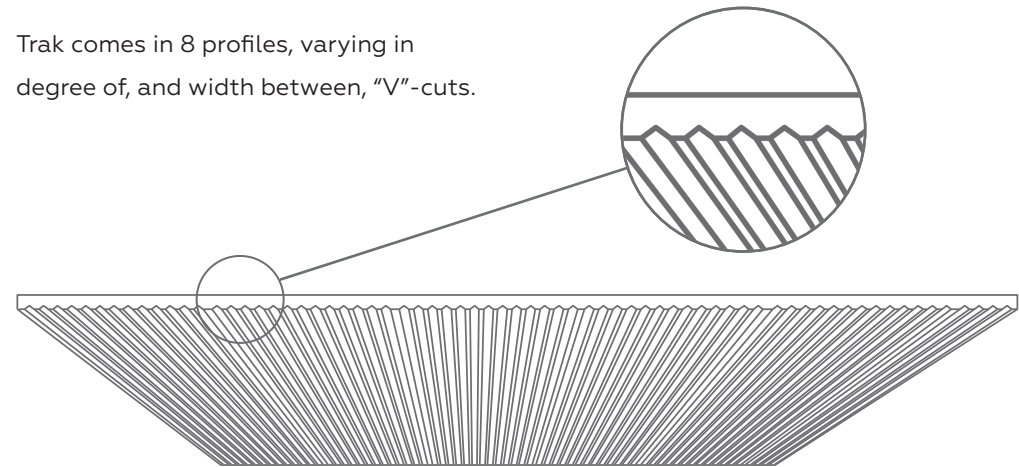


Profile 1




Profile 2




Profile 3




Profile 4




Profile 5



Profile 6



Profile 7



Profile 8



PRODUCT SPECIFICATIONS

CONNECTION

Standard Connection: Construction Adhesive
(provided by MPS)


Alternate Connection: Z-Clip
(Acoustic Enhancers Required)

ADDITIONAL OPTIONS


Curved Walls: V-cut back to allow for curved walls and pillars
*Minimum diameter of 18"

Wood Print: Choose to print woodgrain before V-cut (exposing base PET color) or print after V-cut

"TONGUE & GROOVE" ACOUSTIC ENHANCER

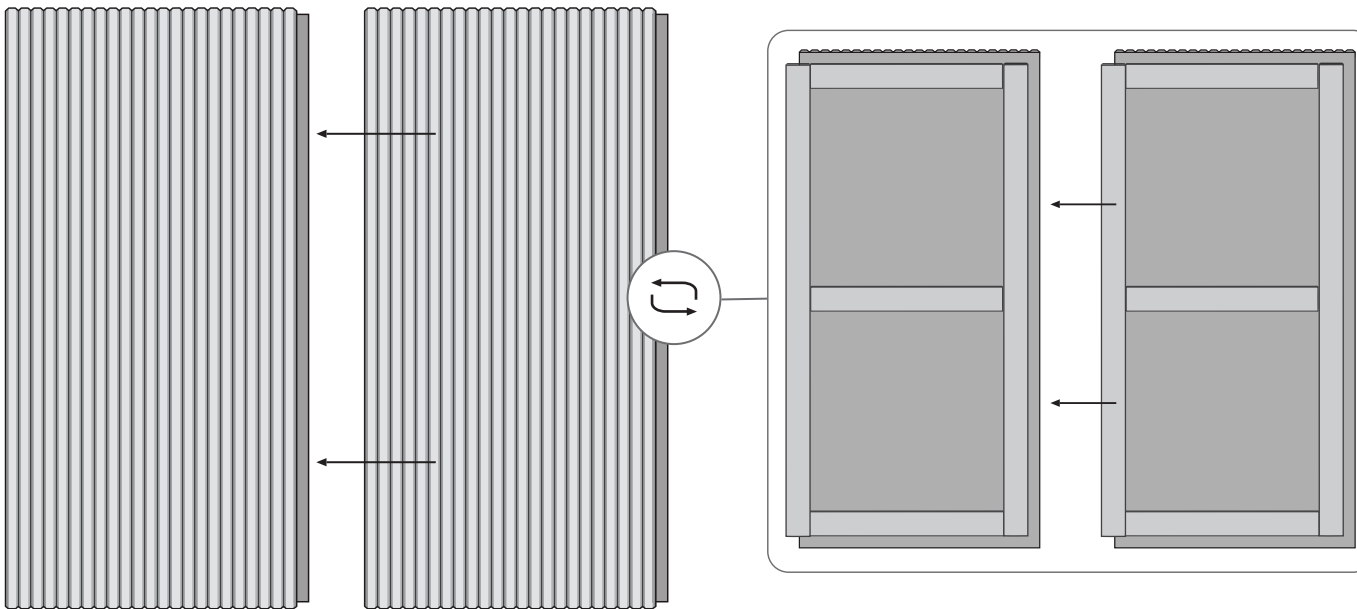

CURVED WALLS

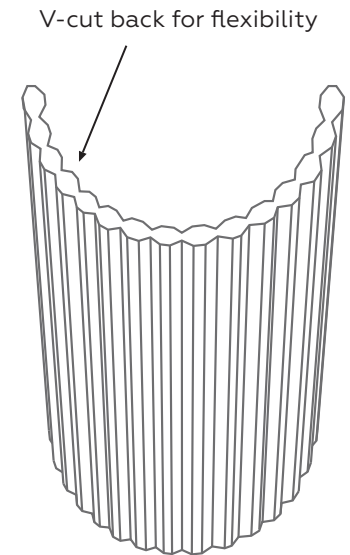



TECHNICAL SPECIFICATIONS



Absorption

Standard: .32 NRC; additional .5 with acoustic enhancers (subject to mounting conditions)

Fire Rating

ASTM E84 Class A

Warranty

Two (2) Years

VOC

ASTM D5116 Compliant

Material

PET Felt: 100% polyester fiber

Maintenance

Vacuum clean to remove dust and debris

Sustainability

Declare.

MPS 9mm Acoustic Panels
MPS LLC

Final Assembly: Trenton, Texas, USA
Life Expectancy: 50 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program (Trenton, TX), Recyclable (100%)

Ingredients:
MPS 9mm PET: Polyethylene Terephthalate

Living Building Challenge Criteria: Compliant

I-13 Red List:
 LBC Red List Free % Disclosed: 100% at 100ppm
 LBC Red List Approved VOC Content: Not Applicable
 Declared

I-10 Interior Performance: CDPH Standard Method v1.2-2017
I-14 Responsible Sourcing: Not Applicable

MPS-0001
EXP. 01 NOV 2025
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare





COLORS & WOODGRAINS

MPS offers a range of standard colors, woodgrains, and custom colors with SHADES.


STANDARD COLORS



WOODGRAINS



SHADES by MPS

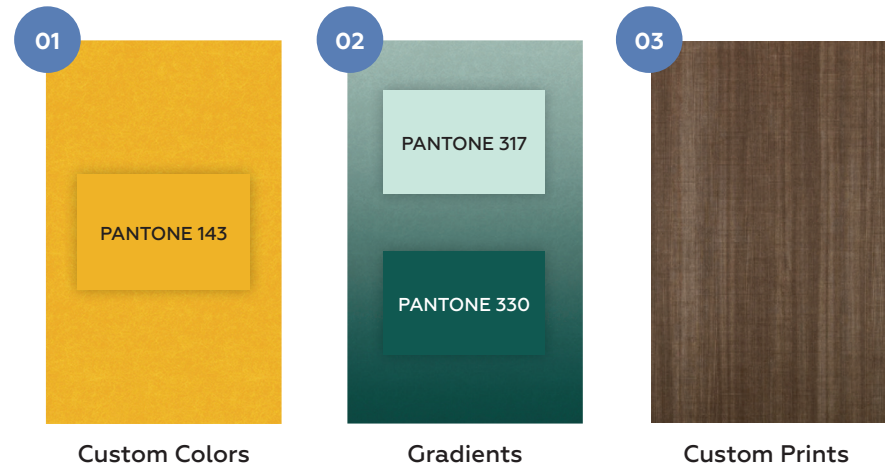

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. SHADES offers Pantone options, full-color prints, and unique gradients. Flat or Heathered? Your choice.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.



MOUNTING OPTIONS

TOOLS REQUIRED



Cutting tool



Steel straightedge



Drill




Hole saw



Construction adhesive

DRY FIT

Before applying adhesive, dry fit the first panel to the wall.

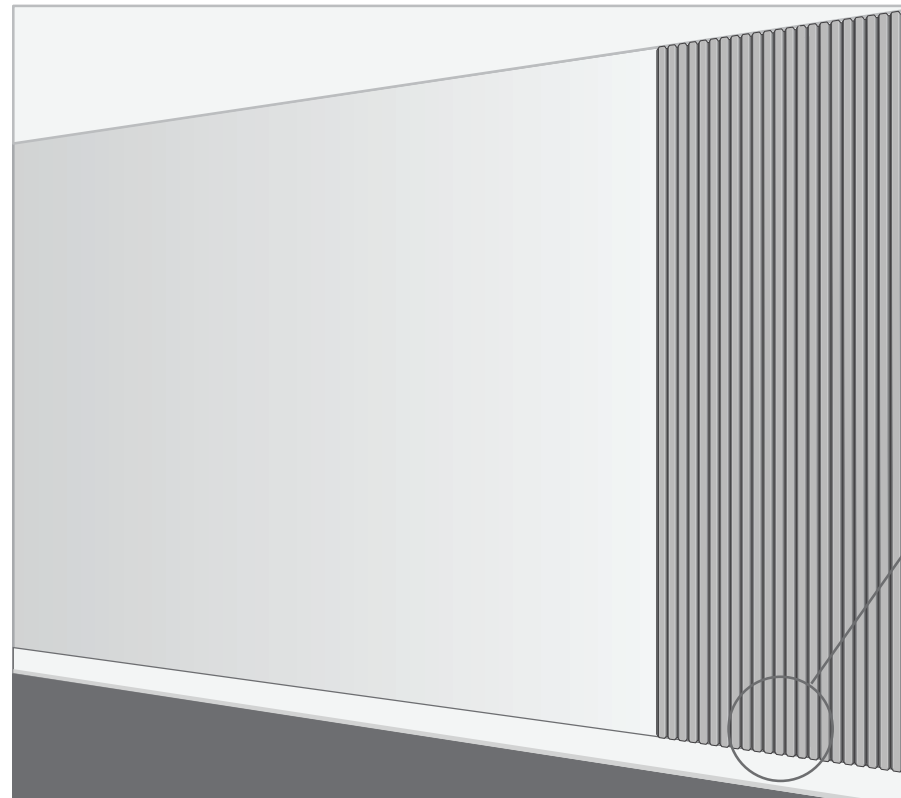


Note: to avoid irregularity, we recommend applying to the top of a baseboard.



MOUNTING OPTIONS

APPLY CONSTRUCTION ADHESIVE (RECOMMENDED)

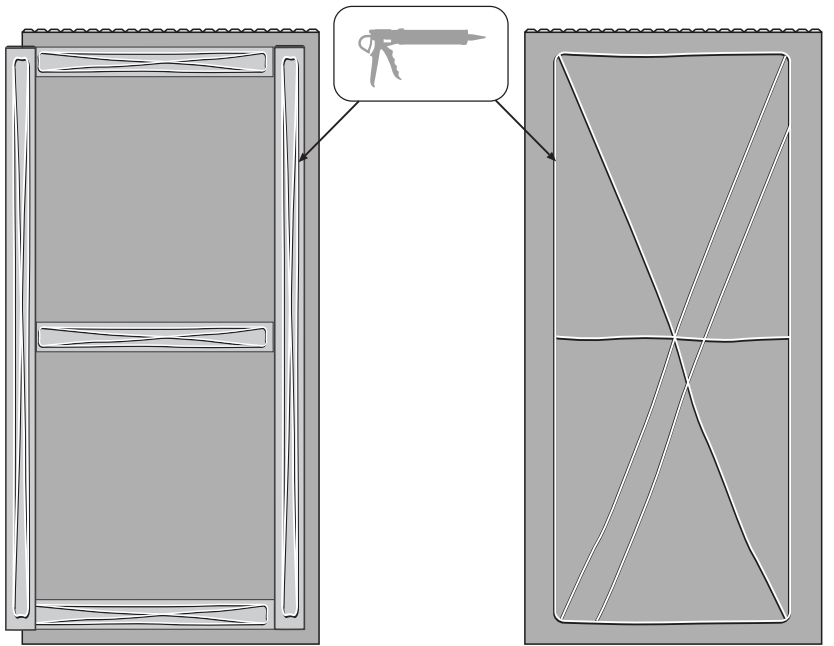


With acoustic enhancers


Without acoustic enhancers

HOOK Z-CLIPS (ALTERNATIVE)

Determine the desired position of z-clips and screw them into the back of the panel.

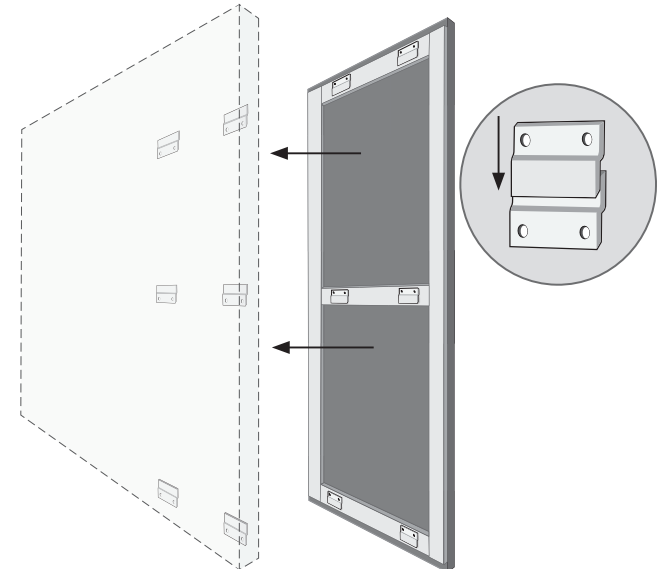


TRIM AS REQUIRED



Trim panels along the end to fit using a straight edge and cutting tool.

TRIMMING HOLES



When cutting a circular hole use a hole saw, and run it backwards to minimize pulling.