



WANDER

felt wall and ceiling






HOW TO SPECIFY

To ensure you get the most out of your space with Wander, follow this comprehensive guide on how to specify your acoustic felt wall.

Whether you're an architect, designer, or facilities manager, this guide will walk you through the key considerations to tailor these panels to your unique needs.

01


APPLICATION

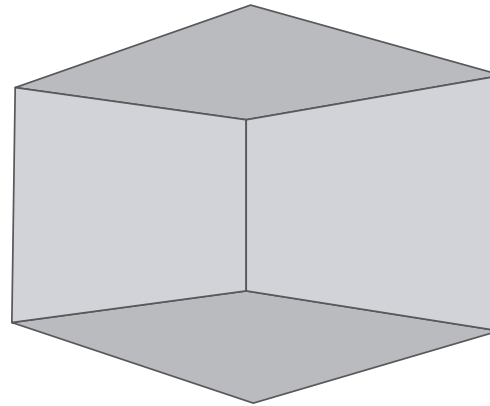

Choose your application. Wall, ceiling, or both.

02

SPECS

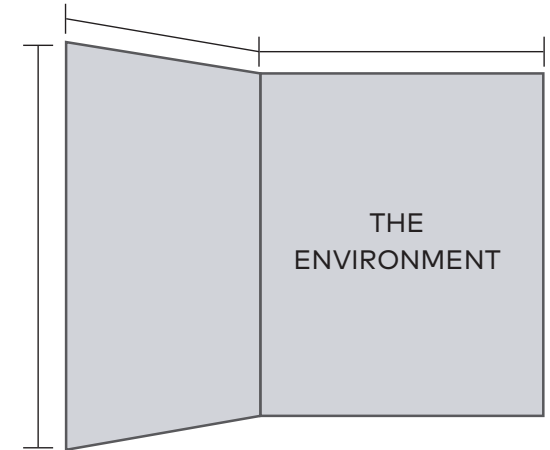

Tell us about your space, the design, and dimensions.

03

WOODGRAINS



What's your woodgrain?
(See page 7)

04

MAKE IT YOUR OWN!



Standard MPS colors
(See page 7)

or



Spec your own color

or



Spec your own woodgrain or print

(See page 7 for more on **SHADES** by  **MPS**)




PRODUCT SPECIFICATIONS - VERTICAL WALL

STANDARD DIMENSIONS

Single Panel	42"W x 119"H
Single Plank	6"W x Variable H
Felt Thickness	3/8"

- Choose from standard or custom woodgrains
- 100% polyester fiber acoustic panel
- Measurably improves visual and acoustic privacy

- Sound absorption and blocking
- Ambient noise reduction within the room
- Reduced reverberation and echo
- Easily installed

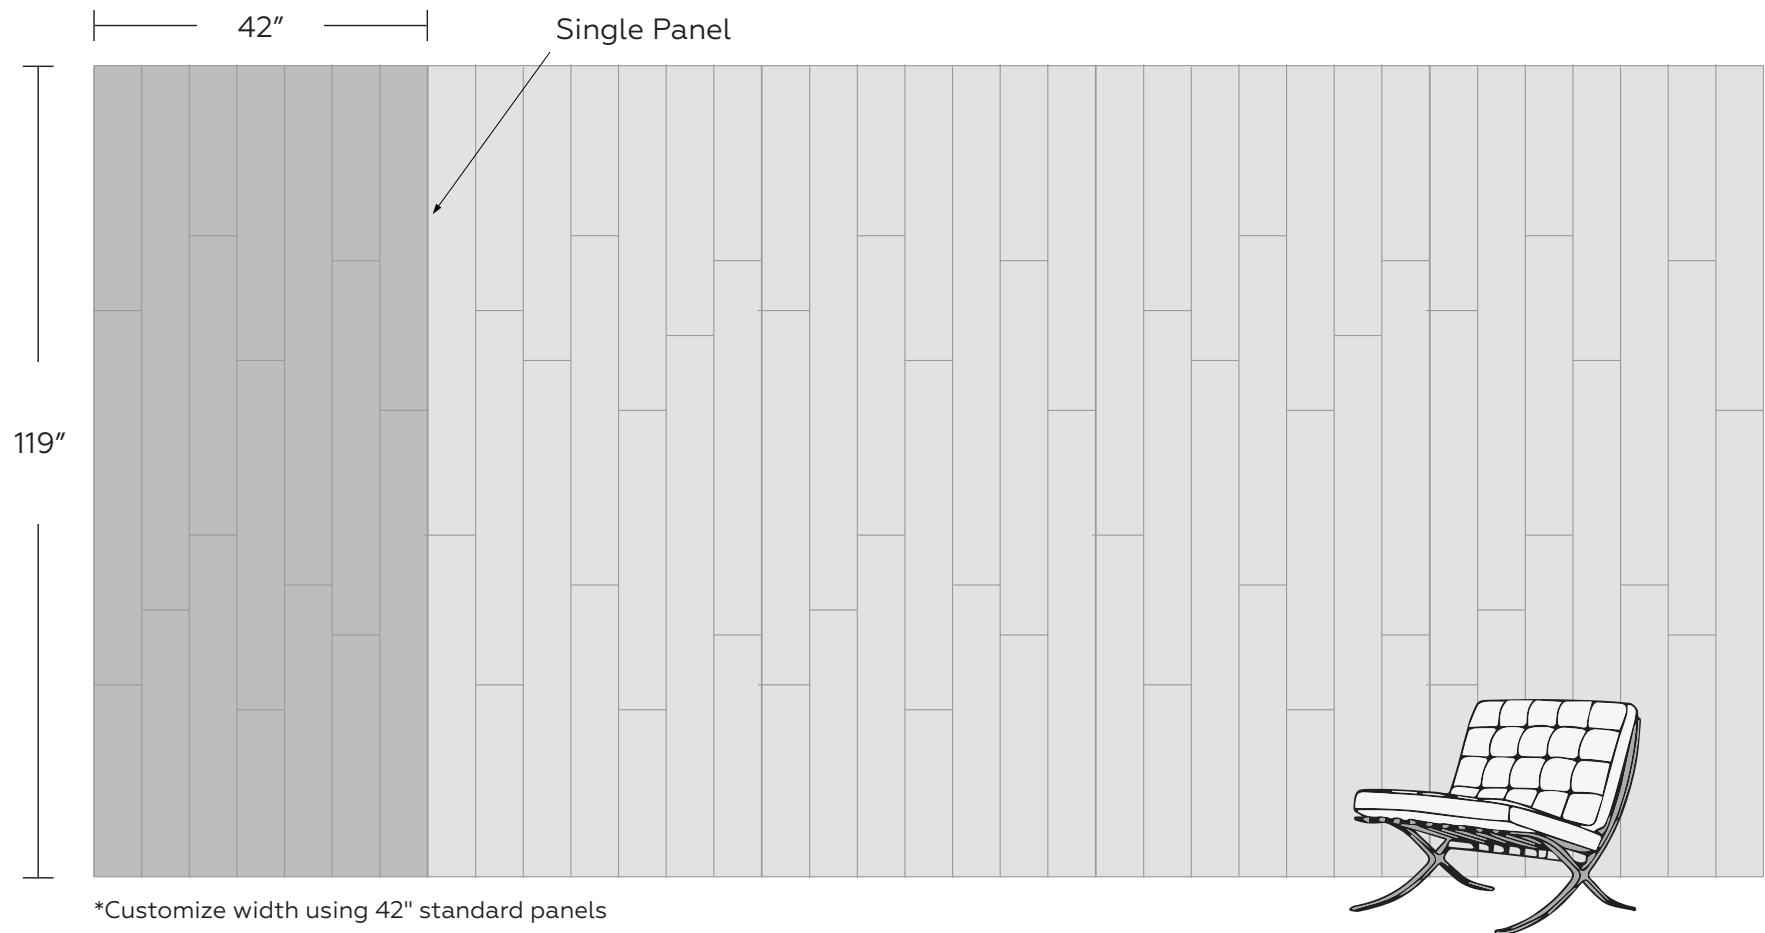




PRODUCT SPECIFICATIONS - HORIZONTAL WALL & CEILING

STANDARD DIMENSIONS

Single Panel	42"W x 81"H
Single Plank	6"W x Variable H
Felt Thickness	3/8"

- Choose from standard or custom woodgrains
- 100% polyester fiber acoustic panel
- Measurably improves visual and acoustic privacy
- Sound absorption and blocking
- Ambient noise reduction within the room
- Reduced reverberation and echo
- Easily installed

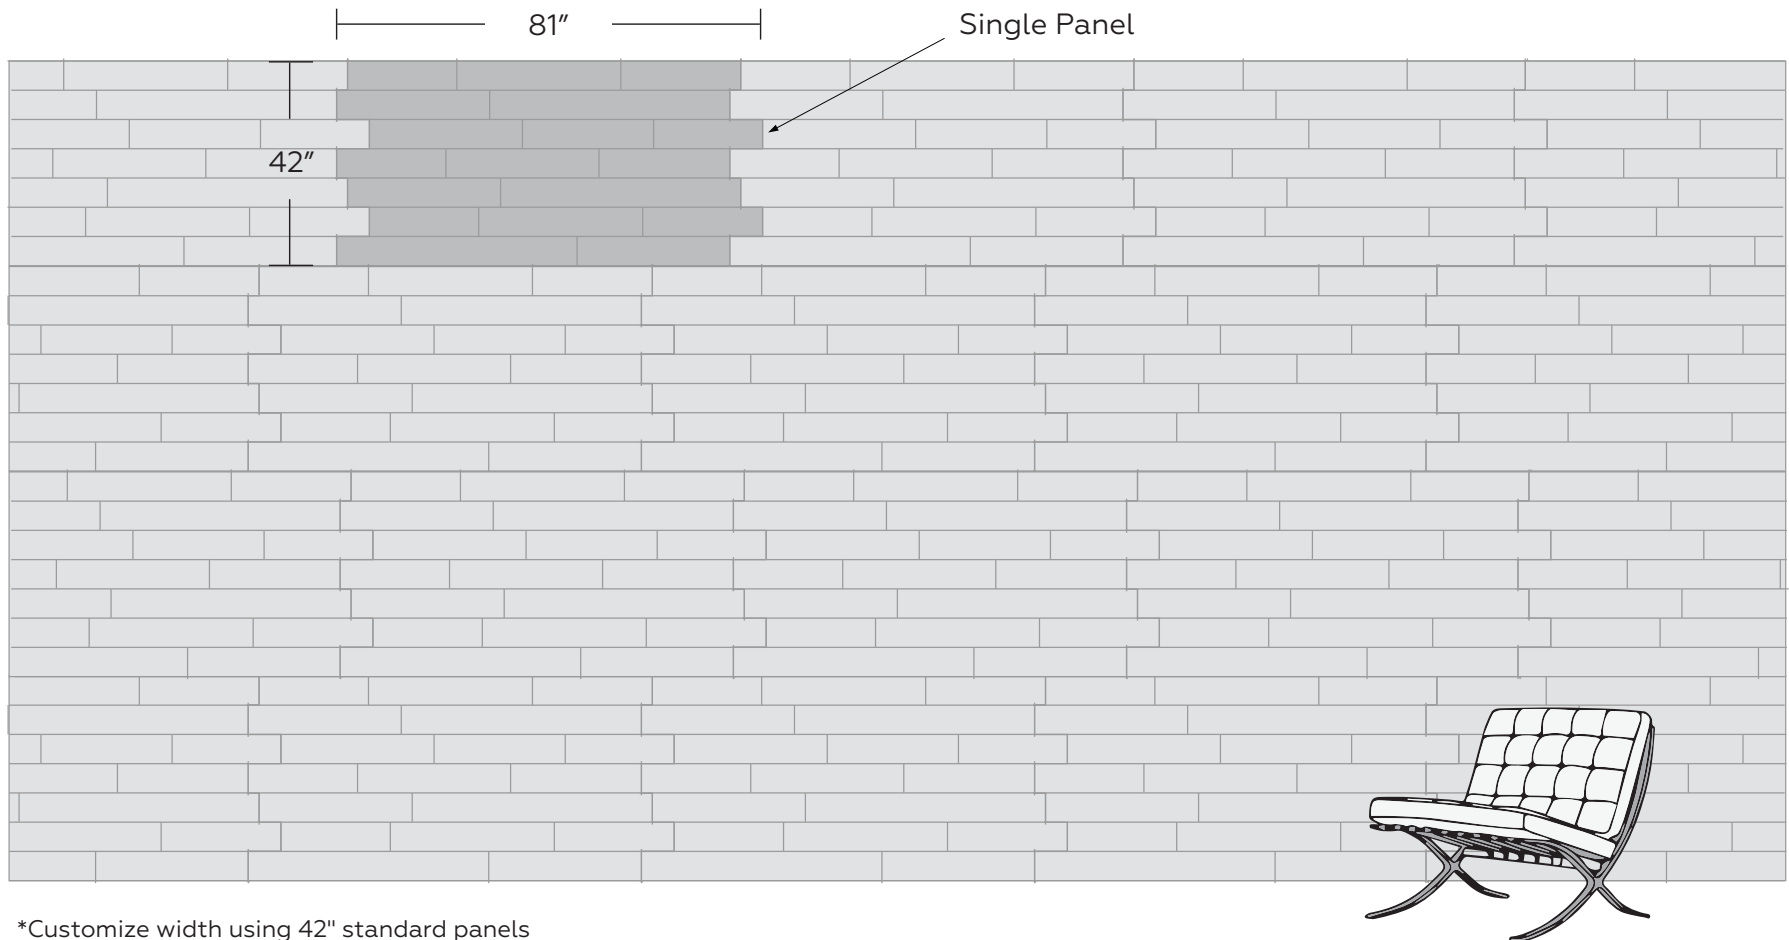

*Customize width using 42" standard panels



PRODUCT SPECIFICATIONS - WALL

CONNECTION


Standard Connection: Construction Adhesive
(provided by MPS)

ADDITIONAL OPTIONS


Configurations: Vertical or horizontal

Wood Print: Choose to print woodgrain before
V-cut (exposing base PET color) or print
after V-cut

CONSTRUCTION ADHESIVE

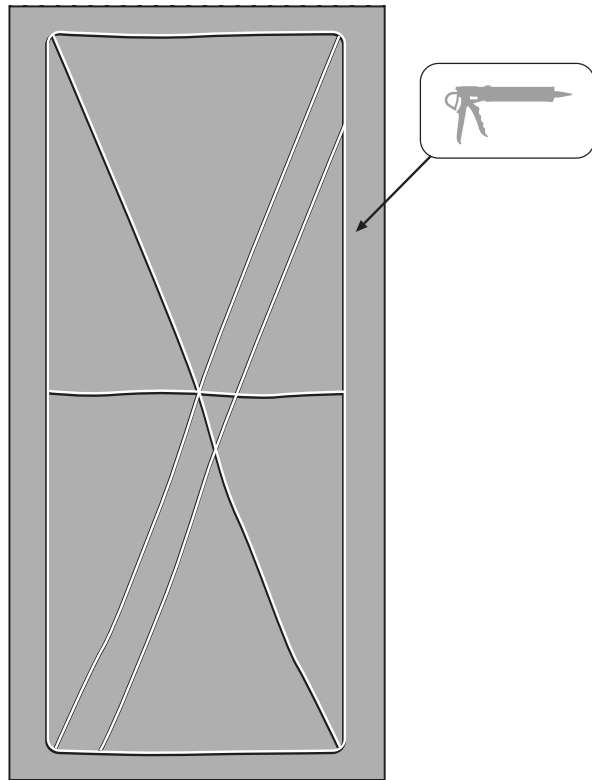

VERTICAL OR HORIZONTAL

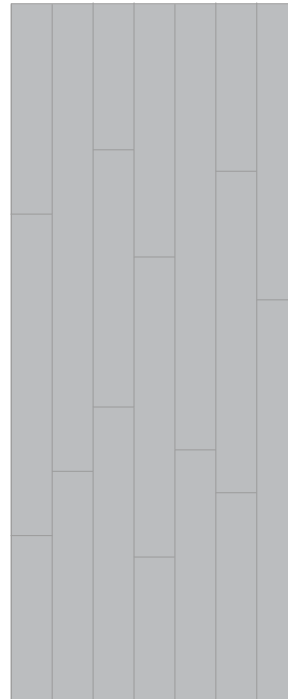



PRODUCT SPECIFICATIONS - CEILING


CONNECTION

Standard Connection: Magnets
(provided by MPS)

ADDITIONAL OPTIONS


Wood Print: Choose to print woodgrain before
V-cut (exposing base PET color) or print
after V-cut

MAGNETIC CONNECTION

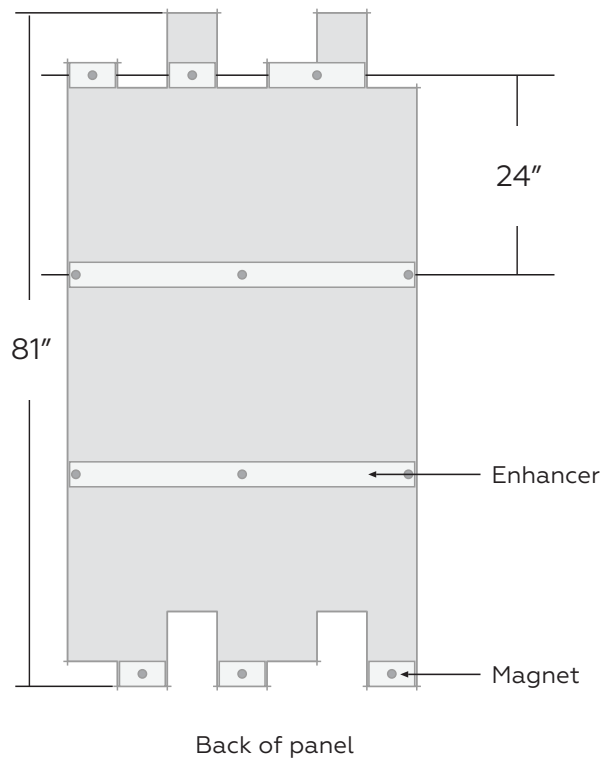


PANEL LAYOUT

FIRST STARTER

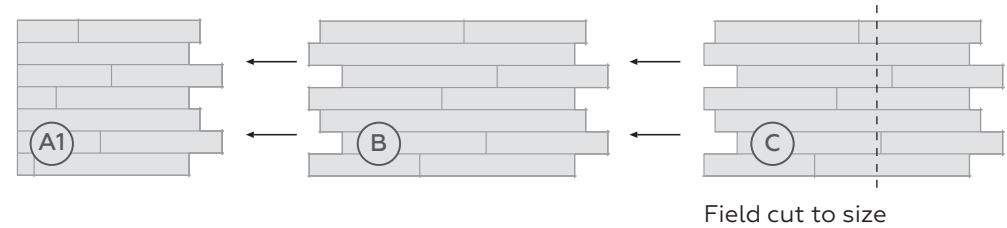

SECOND STARTER

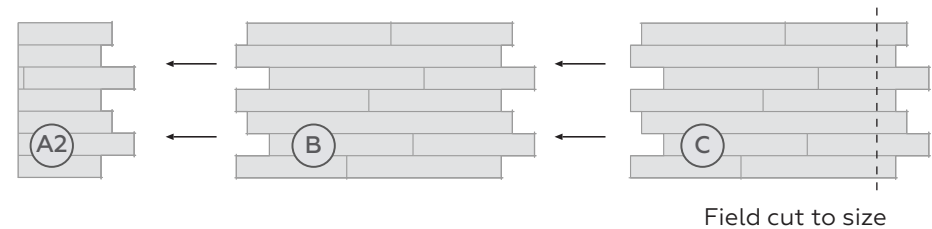



TECHNICAL SPECIFICATIONS



Absorption

Standard: .32 NRC

W/Acoustic Enhancers: .50 NRC
(subject to mounting conditions)

Fire Rating

ASTM E84 Class A

Warranty

Two (2) Years

VOC

ASTM D5116 Compliant

Material

PET Felt: 100% polyester fiber

Maintenance

Vacuum clean to remove dust
and debris

Sustainability





COLORS & WOODGRAINS

MPS offers a range of standard colors, woodgrains, and custom colors with SHADES.


WOODGRAINS



STANDARD COLORS



SHADES by MPS

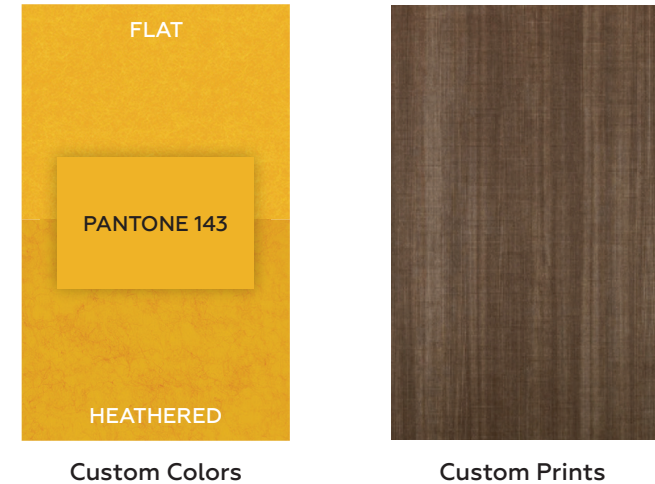

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. Shades offers Pantone options, full-color prints, and unique gradients. Flat or Heathered? Your choice.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.



PRODUCT INSTALLATION

TOOLS REQUIRED



Cutting tool



Steel straightedge



Drill



Hole saw





Construction adhesive (wall)



Magnets (ceiling)

DRY FIT (WALL CONFIGURATION)

Before applying adhesive, dry fit the first panel to the wall.

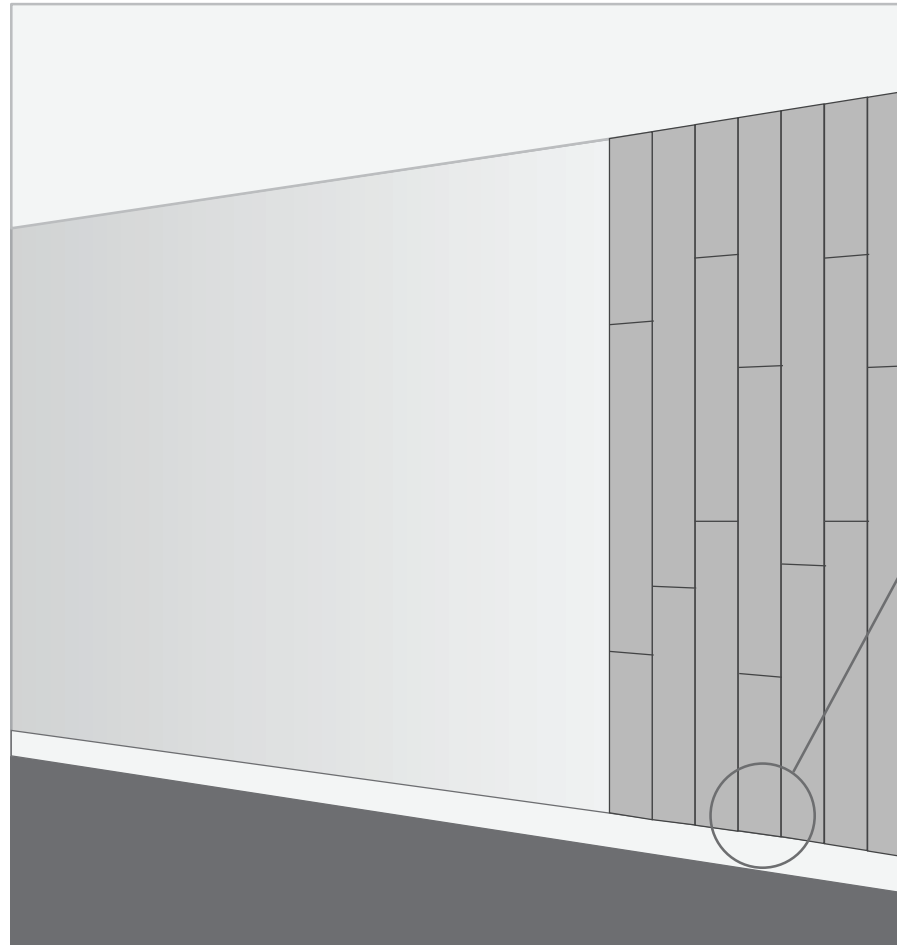



Note: to avoid irregularity, we recommend applying to the top of a baseboard.

*Ensure the surface is level or product will appear uneven




PRODUCT INSTALLATION - WALL

APPLY CONSTRUCTION ADHESIVE

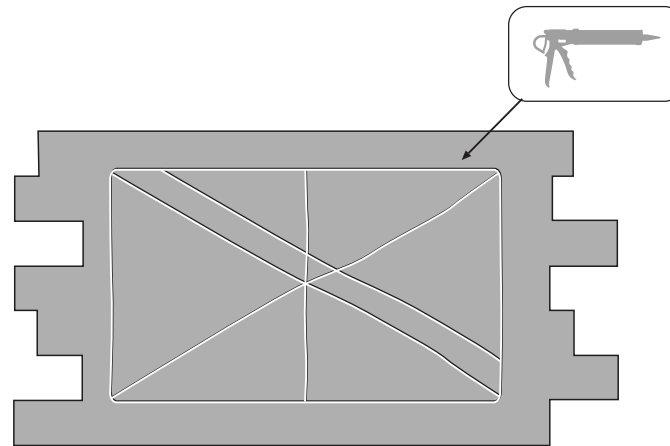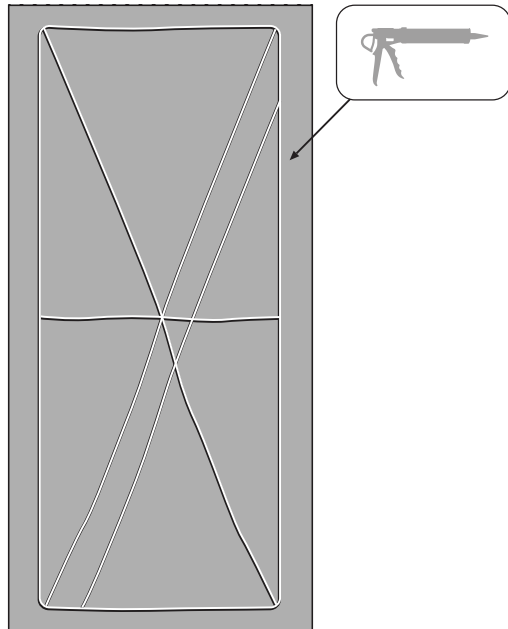


TRIM AS REQUIRED



Trim panels along the end to fit using a straight edge and cutting tool.

TRIMMING HOLES



When cutting a circular hole use a hole saw, and run it backwards to minimize pulling.




PRODUCT INSTALLATION - CEILING

ATTACH MAGNETS AND CONNECT PANELS TO CEILING




Magnet

Note: Pull off of 50lbs per magnet.

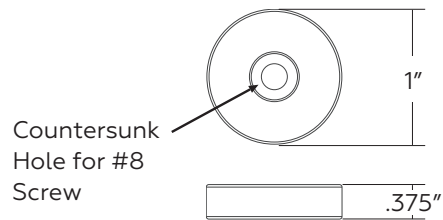


Countersunk Hole for #8 Screw

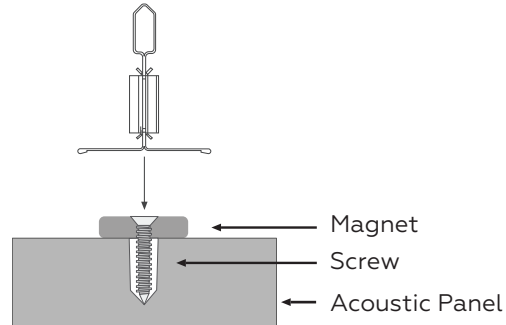


Magnet

Screw

Acoustic Panel

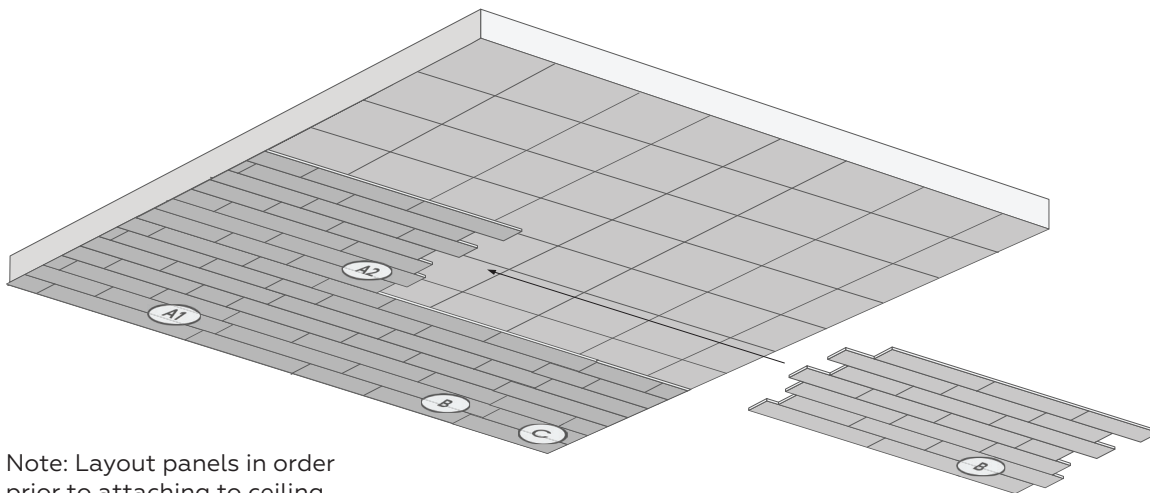


Note: Layout panels in order prior to attaching to ceiling.

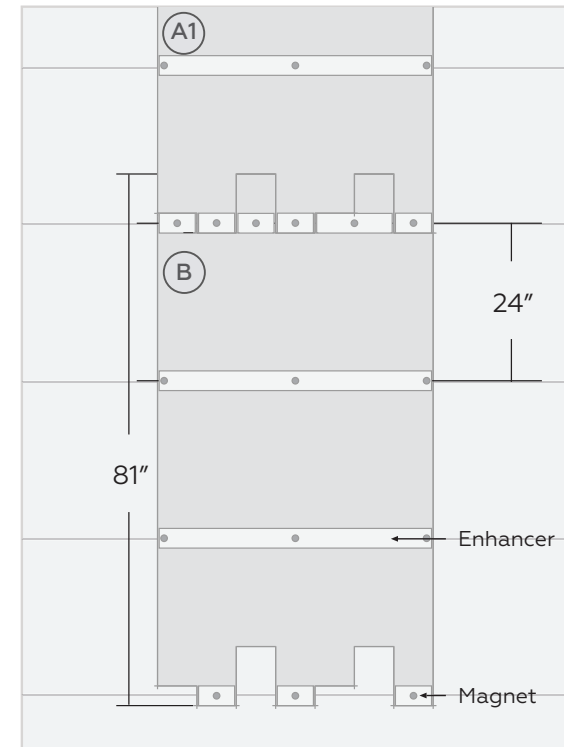

Magnets are attached to the horizontal grid-line. Vertical grid-line is for support of the ceiling grid only.

TRIMMING HOLES



When cutting a circular hole use a hole saw, and run it backwards to minimize pulling.