






felt wall



HOW TO SPECIFY

Re-think, re-design, reveal what a wall can be with Weave. The precise v-cut lines add movement to any space, while also exposing a carefully curated secondary color.

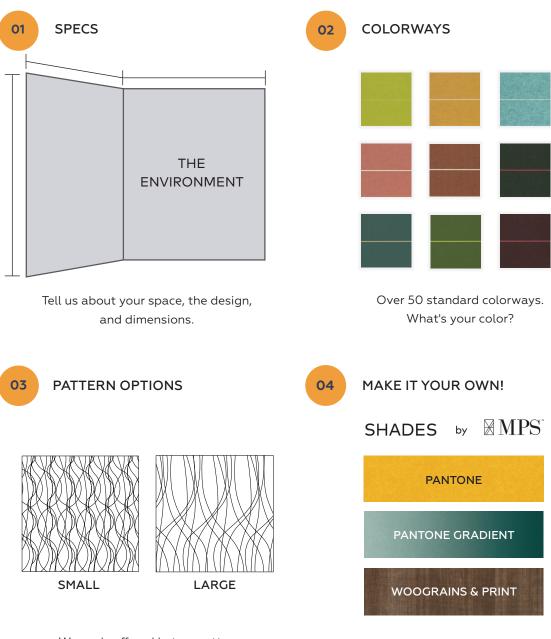

Weave is offered in two pattern sizes, small and large.




³/8″

STANDARD DIMENSIONS

Single Panel 23"W x 119"H

Felt Thickness

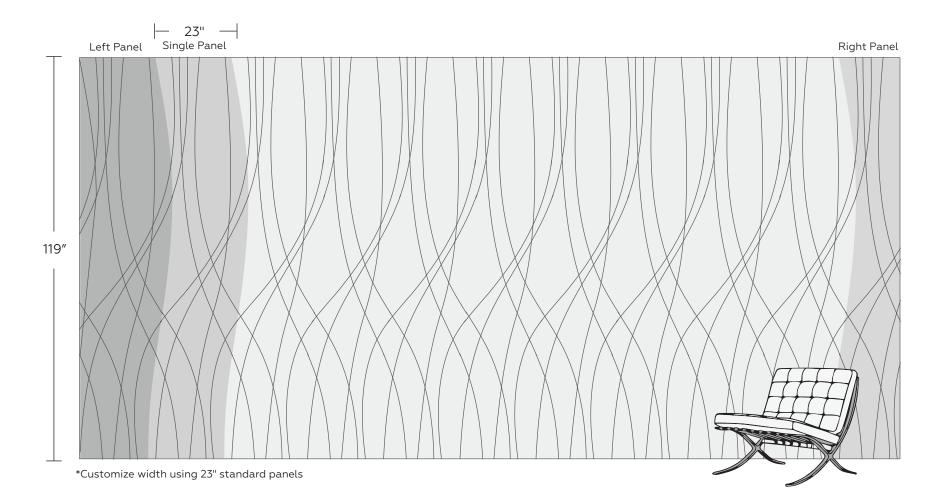



TECHNICAL SPECIFICATIONS



Absorption Standard: .32 NRC (subject to mounting conditions)

Fire Rating ASTM E84 Class A

Warranty Two (2) Years

VOC ASTM D5116 Compliant

Material PET Felt: 100% polyester fiber

Maintenance Vacuum clean to remove dust

and debris

Sustainability



MPS 9mm Acoustic Panels MPS LLC

Final Assembly: Trenton, Texas, USA Life Expectancy: 50 Year(s) End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program (Trenton, TX), Recyclable (100%)

Ingredients: MPS 9mm PET: Polyethylene Terephthalate

Living Building Challenge Criteria: Compliant

 I-13 Red List:
 ■ LBC Red List Free
 % Disclosed: 100% at 100ppm

 LBC Red List Approved
 VOC Content: Not Applicable

 Declared

I-10 Interior Performance: CDPH Standard Method v1.2-2017 I-14 Responsible Sourcing: Not Applicable

MPS-0001 EXP. 01 NOV 2025 Original Issue Date: 2022 MINUFACTURER RESPONSELE FOR LABEL ACCURACY INTERNATIONAL LIVING FUTURE INSTITUTE" https://dure.org/declare/





LIVING BUILDING CHALLENGE


OEKO-TEX® CONFIDENCE IN TEXTILES STANDARD 100



COLORS

MPS offers a range of over 50 curated colorways and woodgrains

CURATED COLORWAYS

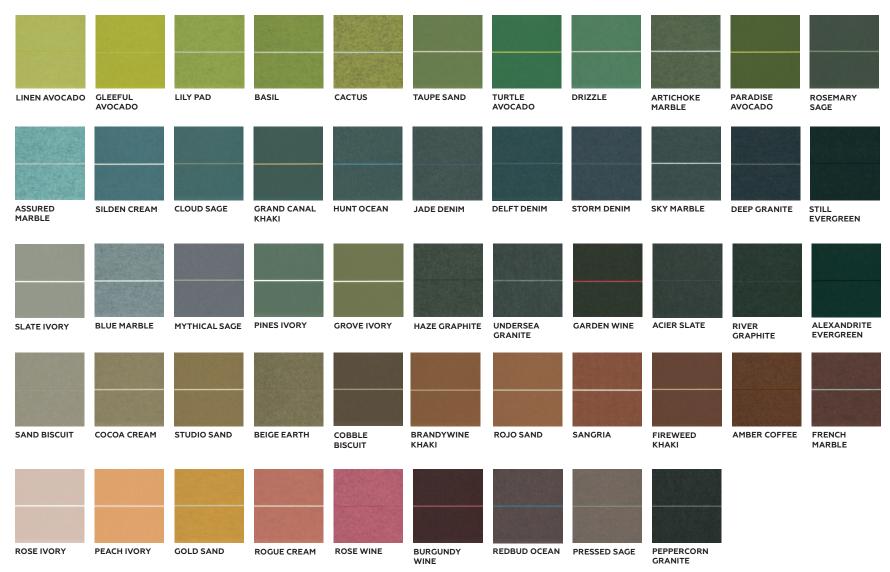



WOODGRAINS



SHADES by MPS O PANTONE 143 Custom Colors SHADES by MPS PANTONE 317 PANTONE 317 PANTONE 330 Gradients Custom Prints


Your design world revolves around color, so don't be limited by standard colors and outdated palettes. SHADES offers Pantone options, full-color prints, and unique gradients. Flat or Heathered? Your choice.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.



INSTALLATION OVERVIEW


SEE INSTALL GUIDE FOR DETAILED STEPS

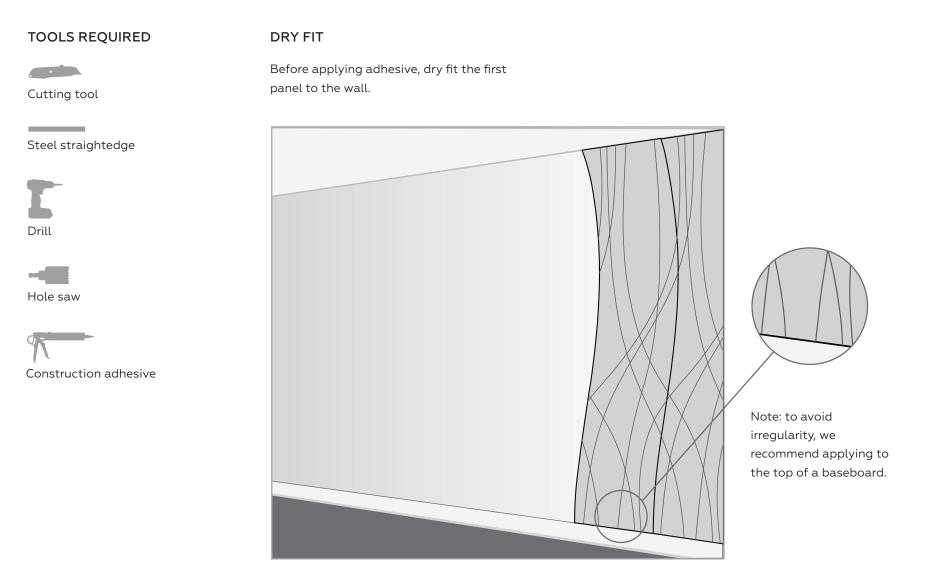




INSTALLATION OVERVIEW

APPLY CONSTRUCTION ADHESIVE

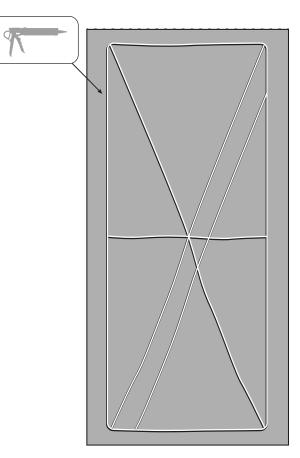


BACK OF PANEL

TRIM AS REQUIRED



Trim panels along the end to fit using a straight edge and cutting tool.

TRIMMING HOLES



When cutting a circular hole use a hole saw, and run it backwards to minimize pulling.