



LONDE

felt ceiling baffle






# HOW TO SPECIFY

Londe beautifully breaks up the straight lines of most open ceilings, adding movement and color that improves both the aesthetics and acoustics of your space!

## 01 SPECS

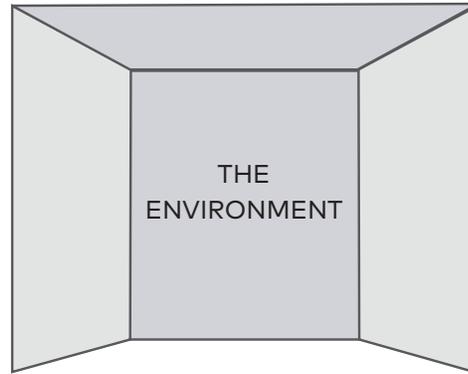


Tell us about your space, the design, and dimensions.

## 02 COLORS



Standard. Woodgrains. Customs. What's your color? (See page 6)

## 03 MAKE IT YOUR OWN!

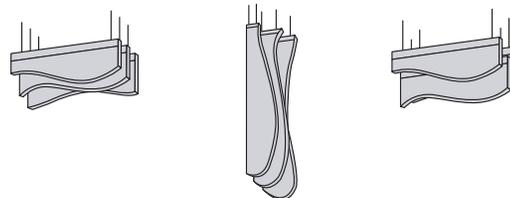

Spec your own configuration. Customize orientation, spacing, etc.

## SHADES by MPS



Even more color options with SHADES by MPS. (See page 6)



# PRODUCT SPECIFICATIONS


## CUSTOM BAFFLE DIMENSIONS

Variable Length	24" - 119"L
Standard	7 3/4"H or 11 3/4"H
Felt Thickness	3/8"W


\*Custom heights and widths available

- Mounting hardware is modular and designed to mount anywhere on the baffle
- Up to 36" between mounting locations is recommended
- Compatible with 9/16" (twist clips) and 15/16" t-grids (provided by others)

## PROFILE




## ELEVATION

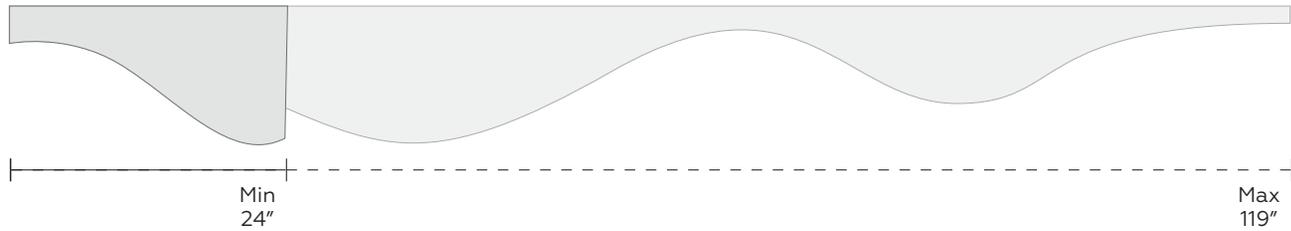

## CUSTOM OPTIONS

- Trak your Londe baffle. Apply Trak ridges to your Londe for a textured look.  
\*Unlimited options with 30 or 45° v-cuts
- Apply a reveal colorway to your Trak'd Londe.  
\*See [mpsacoustics.com/color](http://mpsacoustics.com/color) for colorway options



Trak ridges




## PRODUCT SPECIFICATIONS

### CONTINUOUS BAFFLE


Need Londe to span a larger space?

Connect multiple baffles to make it look like one, long, continuous baffle.

### DOVETAIL

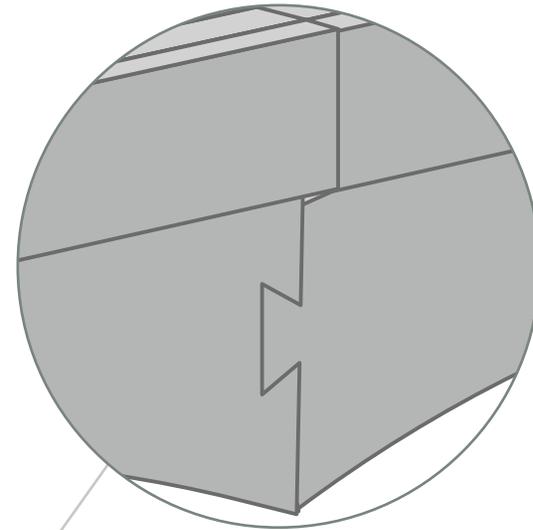

Dovetail connection  
for continuous runs

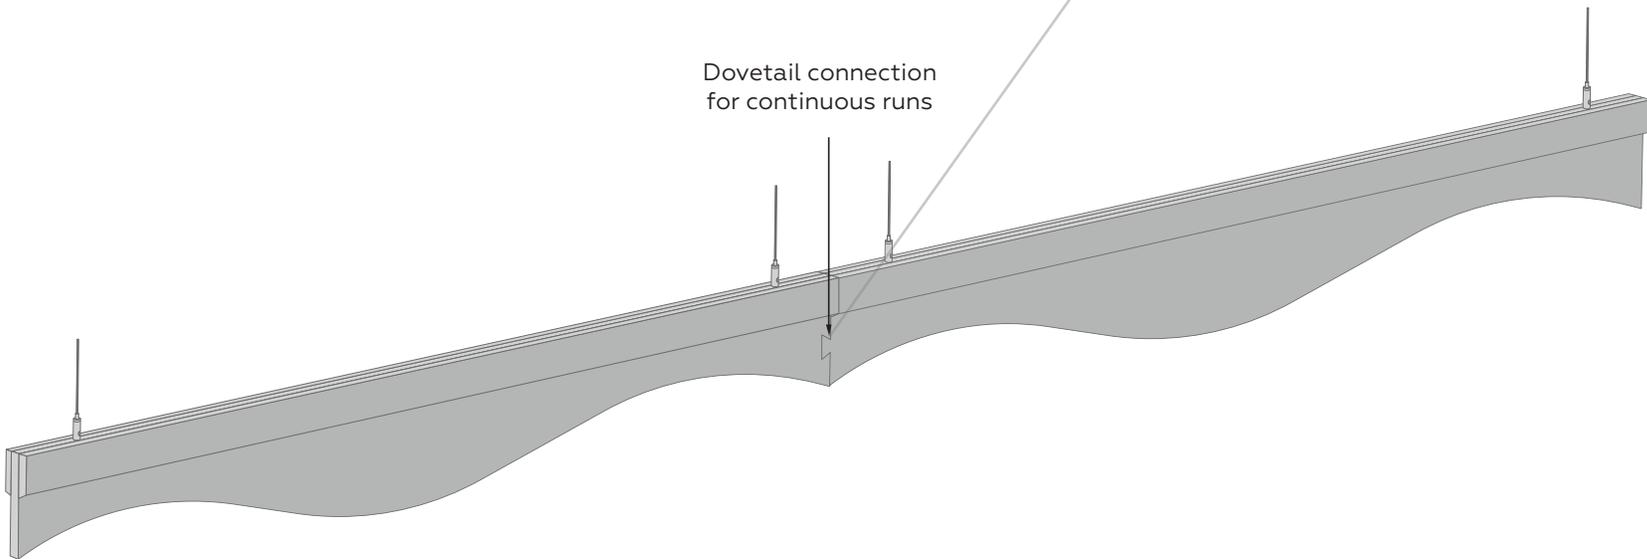



# TECHNICAL SPECIFICATIONS



## Absorption

Standard: .75-1.15 NRC

Recommend spacing  
for max NRC: 6-12"

## Fire Rating

ASTM E84 Class A

## Warranty

Two (2) Years

## VOC

ASTM D5116 Compliant

## Material

PET Felt: 100% polyester fiber

## Maintenance

Vacuum clean to remove dust  
and debris

## Sustainability



**MPS 9mm Acoustic Panels**  
**MPS LLC**

**Final Assembly:** Plano, Texas, USA  
**Life Expectancy:** 50 Year(s)  
**End of Life Options:** Salvageable/Reusable in its Entirety, Take Back Program (Plano, TX), Recyclable (100%)

**Ingredients:**  
Polyethylene Terephthalate

**Living Building Challenge Criteria:** Compliant

**I-13 Red List:**  
 LBC Red List Free      % Disclosed: 100% at 100ppm  
 LBC Red List Approved      VOC Content: Not Applicable  
 Declared

**I-10 Interior Performance:** CDPH Standard Method v1 2-2017  
**I-14 Responsible Sourcing:** Not Applicable

MPS-0001  
EXP. 01 NOV 2026  
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)





# COLORS & WOODGRAINS

MPS offers a range of standard colors, woodgrains, and custom colors with SHADES.

## STANDARD COLORS



## WOODGRAINS



## SHADES by MPS™

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. We've distilled years of testing into a three-tier system that protects print quality and design intent.

\*Some limitations apply. Consult your MPS acoustics expert to discuss your project.

RECOMMENDED	GUIDED CUSTOM	BESPOKE
<p><b>Signature Series</b></p> <p>Proven color. Perfect results.</p>	<p><b>Studio Collaboration</b></p> <p>Your color, guided by our expertise.</p>	<p><b>The Color Lab</b></p> <p>When your color needs to be one-of-a-kind.</p>




## MOUNTING OPTIONS

### GRIDFIT CONNECT

Connect Londe baffles to t-grid with zero hardware.

Hook to the t-grid with the GridFit notches on the top of each baffle.

### GRIDFIT

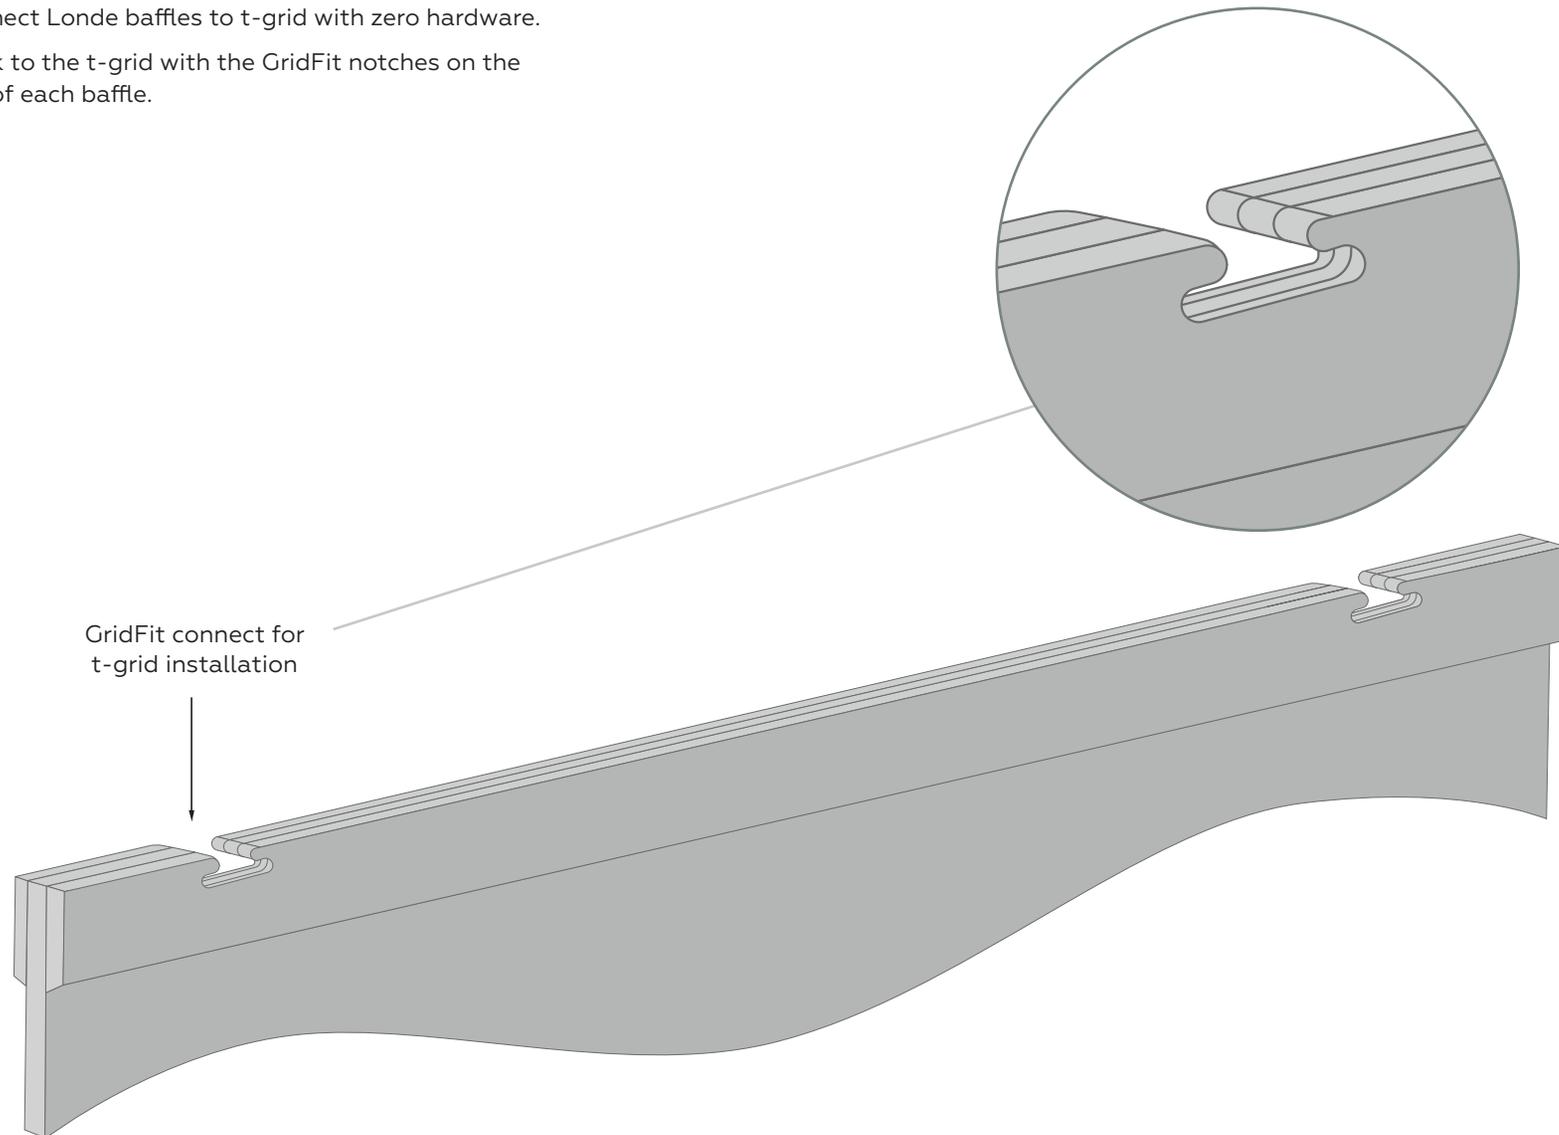




# MOUNTING OPTIONS

## MOUNTING ON T-GRID



Londe is intended for "On Grid" or "T-Bar Ceiling" mounting and is to be installed with magnets, twist clips, or cable grippers. See details for each mounting option below.

### MAGNETS

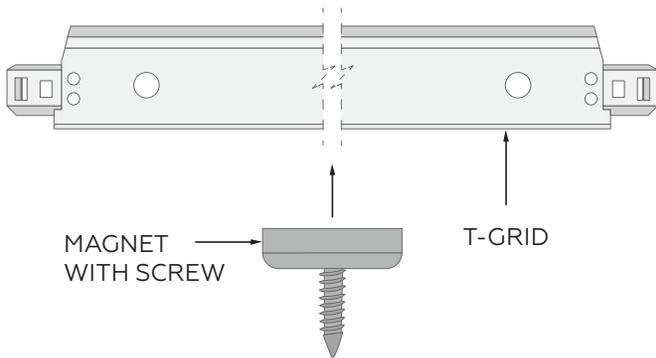

MAGNET  
HARDWARE TO  
ATTACH BAFFLE  
TO 15/16" T-GRID

### DETAIL

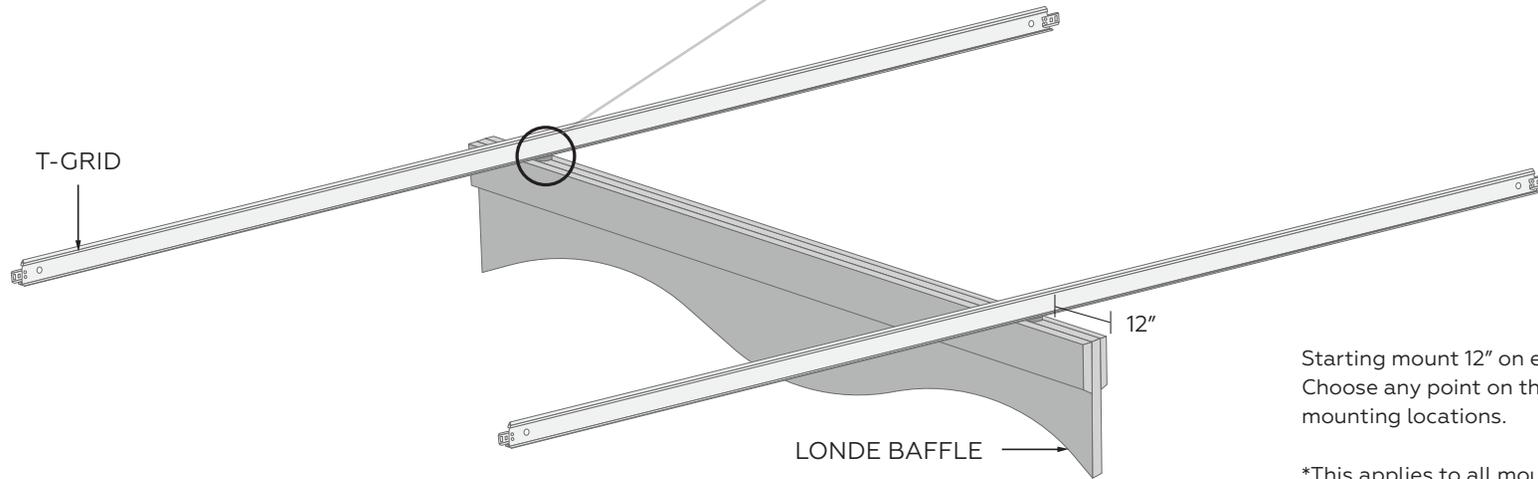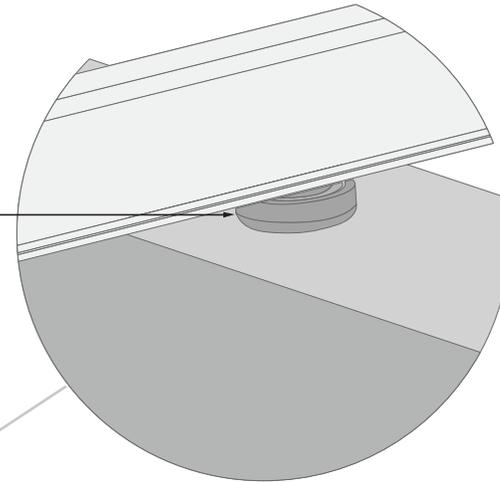

Starting mount 12" on either side.  
Choose any point on the baffle for additional  
mounting locations.


\*This applies to all mounting options



# MOUNTING OPTIONS

## TWIST CLIPS


Compatible with 9/16" and 15/16" t-grids.

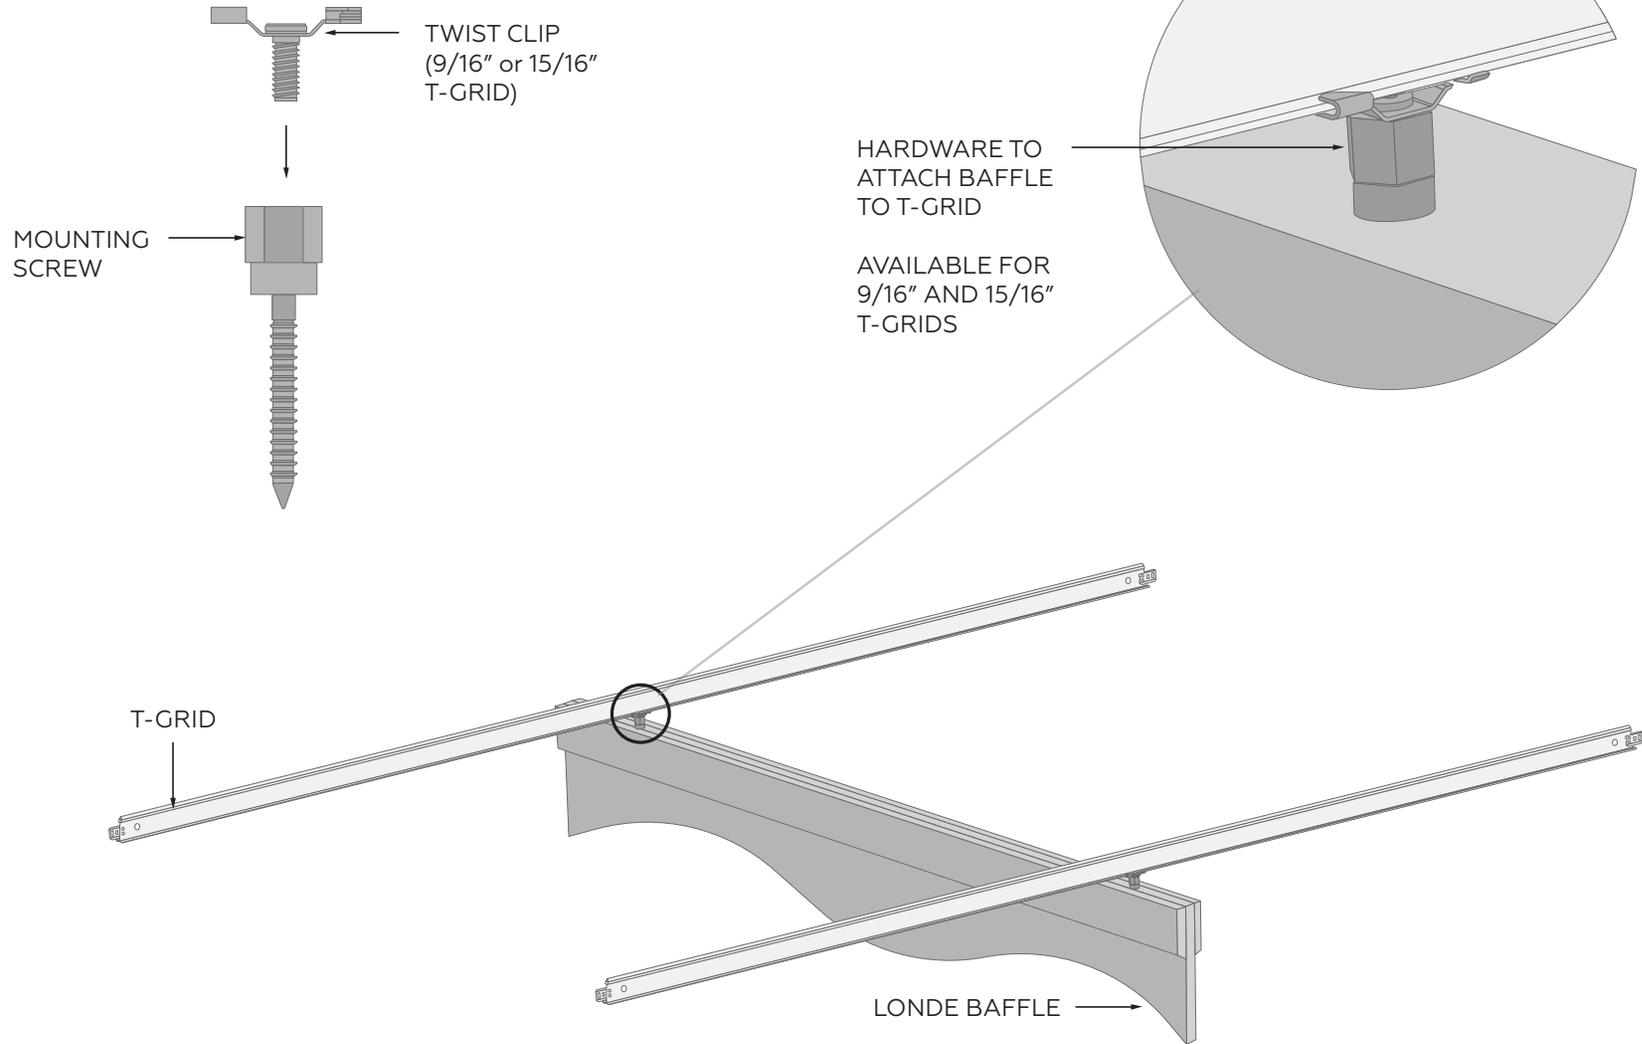



# MOUNTING OPTIONS

## CABLE GRIPPERS

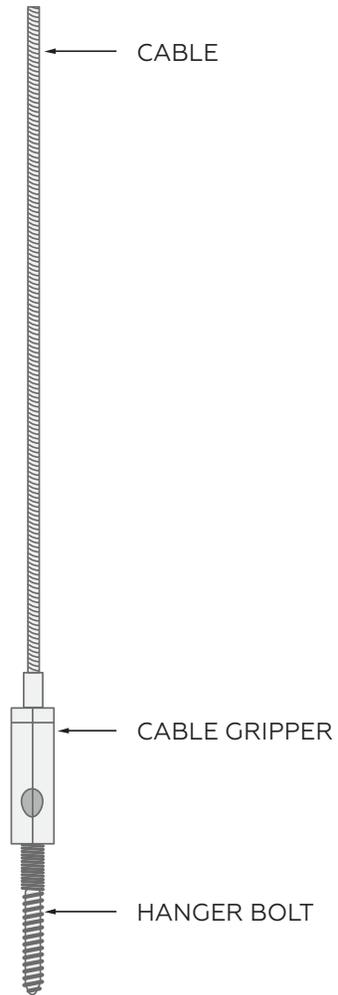

## DETAIL

