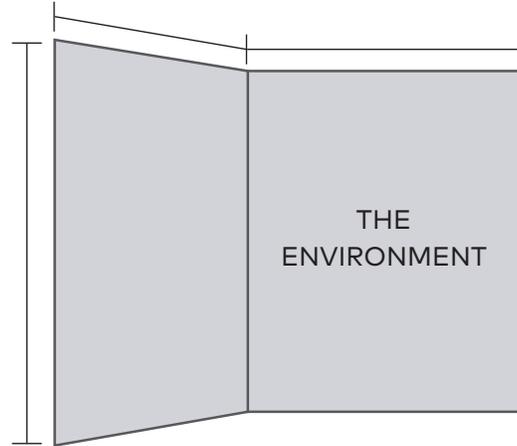# LOOP

felt wall

MPS™

HOW TO SPECIFY

Loop introduces a soft, continuous rhythm with its capsule-shaped pattern and flowing geometry. The clean lines and subtle motion bring balance to a space, adding depth without visual clutter. Ideal for environments that call for a calm, modern aesthetic, Loop offers a versatile solution that blends acoustic performance with understated design.
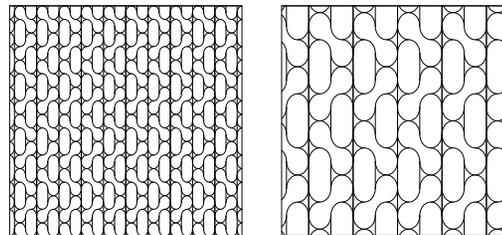
01 SPECS

THE ENVIRONMENT

Tell us about your space, the design, and dimensions.

02 COLORWAYS

Over 50 standard colorways. What's your color?

03 PATTERN SIZES

SMALL   LARGE

Loop is offered in two pattern sizes, small and large.

04 MAKE IT YOUR OWN!

SHADES by ⊠ MPS

☑ Signature Series

Studio Collaboration

The Color Lab

Even more color options with SHADES by MPS. (See page 6)

PRODUCT SPECIFICATIONS

STANDARD DIMENSIONS

Single Panel	23"W x 119"H
Felt Thickness	⅜"

23"
Single Panel

119"

*Customize width using 23" standard panels
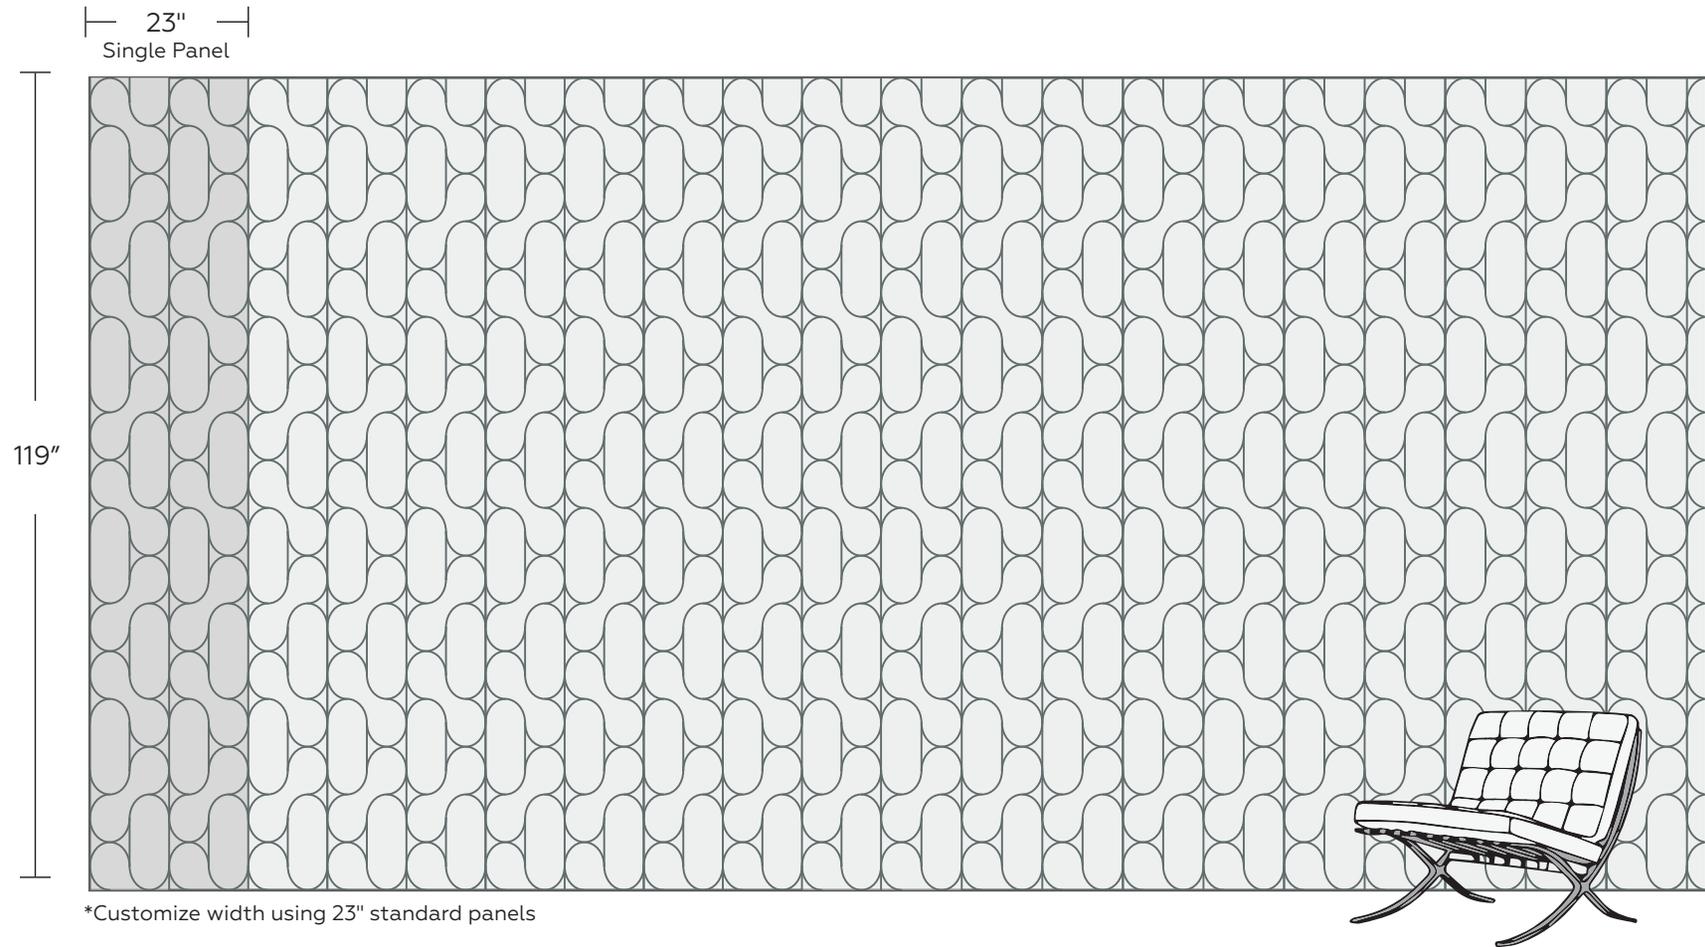
TECHNICAL SPECIFICATIONS

Absorption

Standard: .32 NRC

(subject to mounting conditions)

Fire Rating

ASTM E84 Class A

Warranty

Two (2) Years

VOC

ASTM D5116 Compliant

Material

PET Felt: 100% polyester fiber

Maintenance

Vacuum clean to remove dust
and debris

Sustainability

Declare.

MPS 9mm Acoustic Panels
MPS LLC

Final Assembly: Plano, Texas, USA
Life Expectancy: 50 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program (Plano, TX), Recyclable (100%)

Ingredients:

Polyethylene Terephthalate

Living Building Challenge Criteria: Compliant

I-13 Red List:
■ LBC Red List Free   % Disclosed: 100% at 100ppm
☐ LBC Red List Approved   VOC Content: Not Applicable
☐ Declared

I-10 Interior Performance: CDPH Standard Method v1.2-2017
I-14 Responsible Sourcing: Not Applicable

MPS-0001
EXP. 01 NOV 2026
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

U.S. GREEN BUILDING COUNCIL USGBC®

WELL PLATINUM 2017

REACH COMPLIANT

Red List Free

LIVING BUILDING CHALLENGE™

OEKO-TEX® CONFIDENCE IN TEXTILES STANDARD 100

COLORS

MPS offers a range of over 50 curated colorways and woodgrains

CURATED COLORWAYS

LINEN AVOCADO	GLEEFUL AVOCADO	LILY PAD	BASIL	CACTUS	TAUPE SAND

TURTLE AVOCADO	DRIZZLE	ARTICHOKE MARBLE	PARADISE AVOCADO	ROSEMARY SAGE

ASSURED MARBLE	SILDEN CREAM	CLOUD SAGE	GRAND CANAL KHAKI	HUNT OCEAN	JADE DENIM

DELFT DENIM	STORM DENIM	SKY MARBLE	DEEP GRANITE	STILL EVERGREEN

SLATE IVORY	BLUE MARBLE	MYTHICAL SAGE	PINES IVORY	GROVE IVORY	HAZE GRAPHITE

UNDERSEA GRANITE	GARDEN WINE	ACIER SLATE	RIVER GRAPHITE	ALEXANDRITE EVERGREEN

SAND BISCUIT	COCOA CREAM	STUDIO SAND	BEIGE EARTH	COBBLE BISCUIT	BRANDYWINE KHAKI

ROJO SAND	SANGRIA	FIREWEED KHAKI	AMBER COFFEE	FRENCH MARBLE

ROSE IVORY	PEACH IVORY	GOLD SAND	ROGUE CREAM	ROSE WINE

BURGUNDY WINE	REDBUD OCEAN	PRESSED SAGE	PEPPERCORN GRANITE

COLORS

WOODGRAINS

| PLYWOOD | PLANCHE OAK | AGED ASH | HONEY | ASH | WEATHERED TEAK | ITALIAN WALNUT | WARM ASH | MAIN STREET ELM | VISTA WALNUT | DARK WALNUT |

SHADES by ⊠ MPS™

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. We've distilled years of testing into a three-tier system that protects print quality and design intent.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.

RECOMMENDED	GUIDED CUSTOM	BESPOKE
Signature Series	**Studio Collaboration**	**The Color Lab**
Proven color. Perfect results.	Your color, guided by our expertise.	When your color needs to be one-of-a-kind.

INSTALLATION OVERVIEW

SEE INSTALL GUIDE FOR DETAILED STEPS

TOOLS REQUIRED

Cutting tool
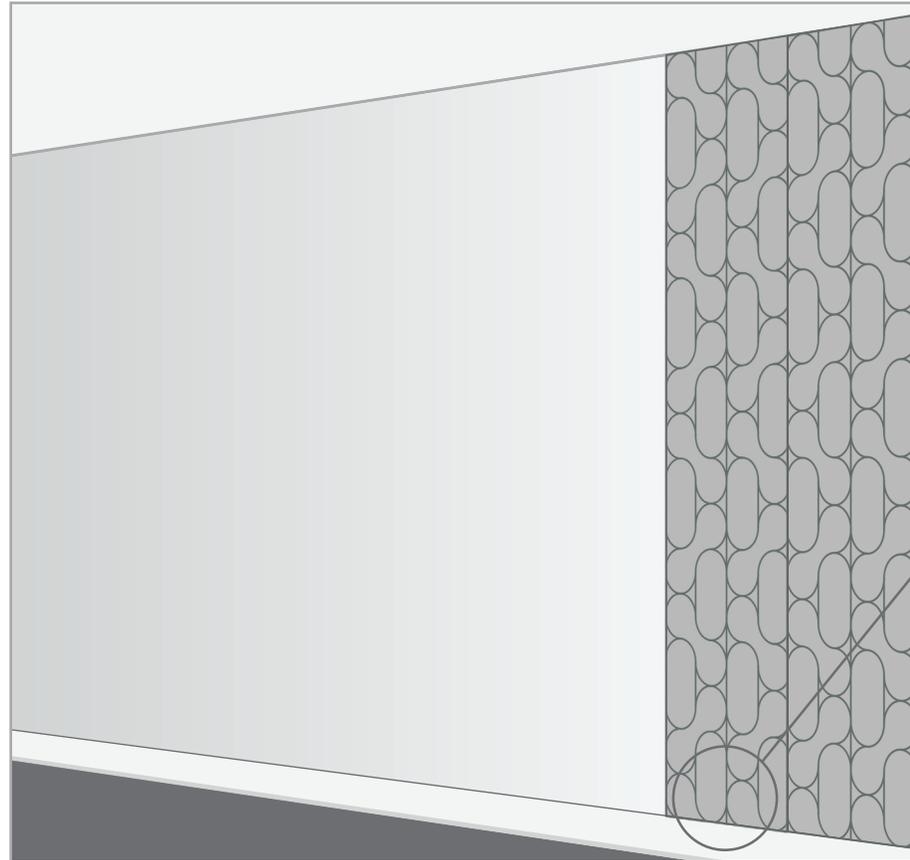
Steel straightedge

Drill

Hole saw

Construction adhesive

DRY FIT

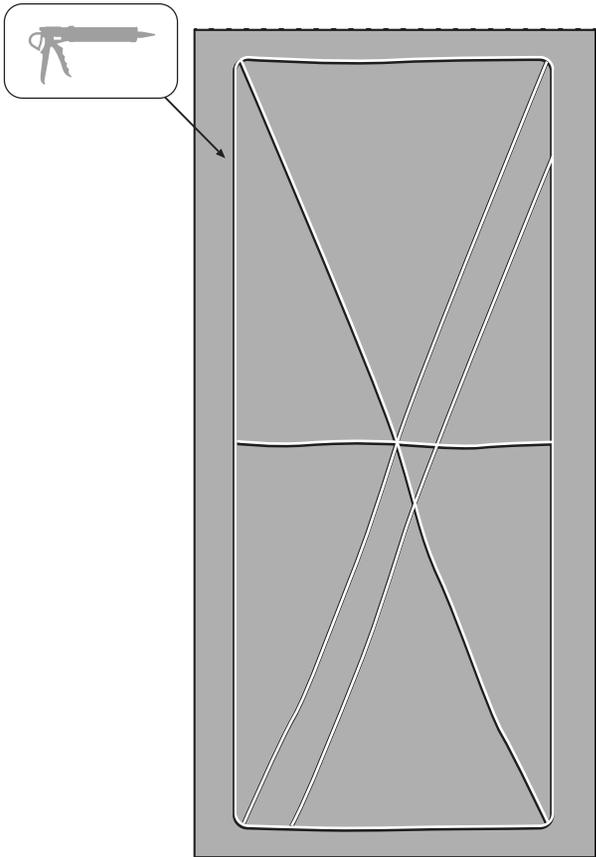Before applying adhesive, dry fit the first panel to the wall.

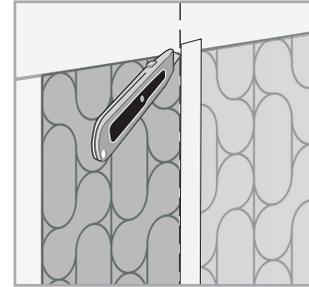Note: to avoid irregularity, we recommend applying to the top of a baseboard.

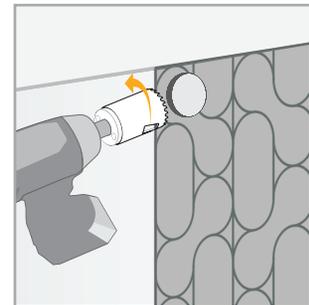# INSTALLATION OVERVIEW

APPLY CONSTRUCTION ADHESIVE

BACK OF PANEL

TRIM AS REQUIRED

Trim panels along the end to fit using a straight edge and cutting tool.

TRIMMING HOLES

When cutting a circular hole use a hole saw, and run it backwards to minimize pulling.