



COLIGO WALL

felt wall






HOW TO SPECIFY


Coligo acoustic wall coverings are flat wall-mounted panels that provide significant sound absorbing benefits.

01 SPECS

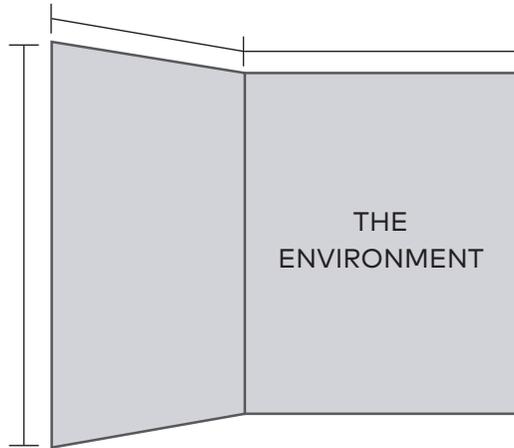


Tell us about your space, the design, and dimensions.

02 COVERAGE

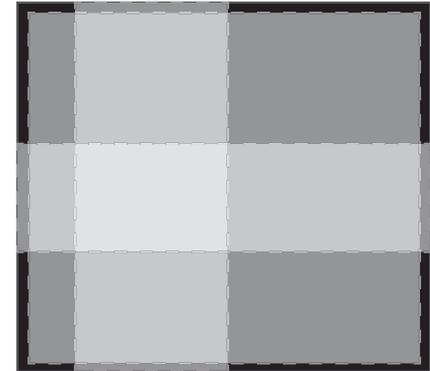


How much coverage does your project call for?

03 COLORS

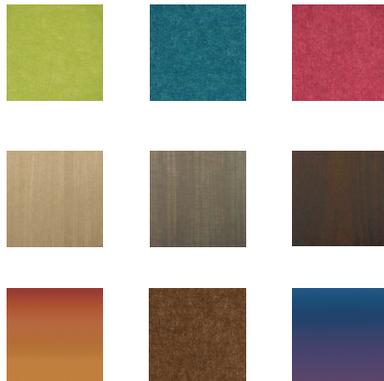

Standard. Woodgrains. Customs. What's your color? (See page 5)

04 MAKE IT YOUR OWN!

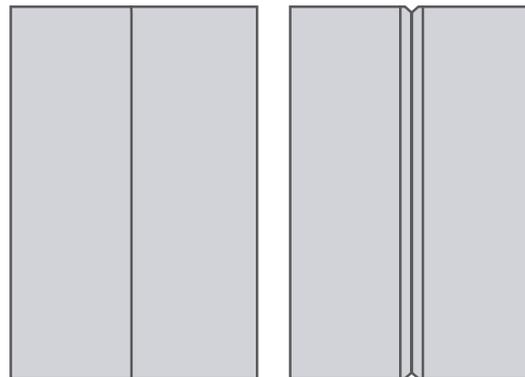

Specify your Coligo Wall with flush or beveled joints to add dimension and texture.

SHADES by MPS




Even more color options with SHADES by MPS. (See page 5)



PRODUCT SPECIFICATIONS

STANDARD DIMENSIONS

Standard	46" x 119"
Felt Thickness	3/8"

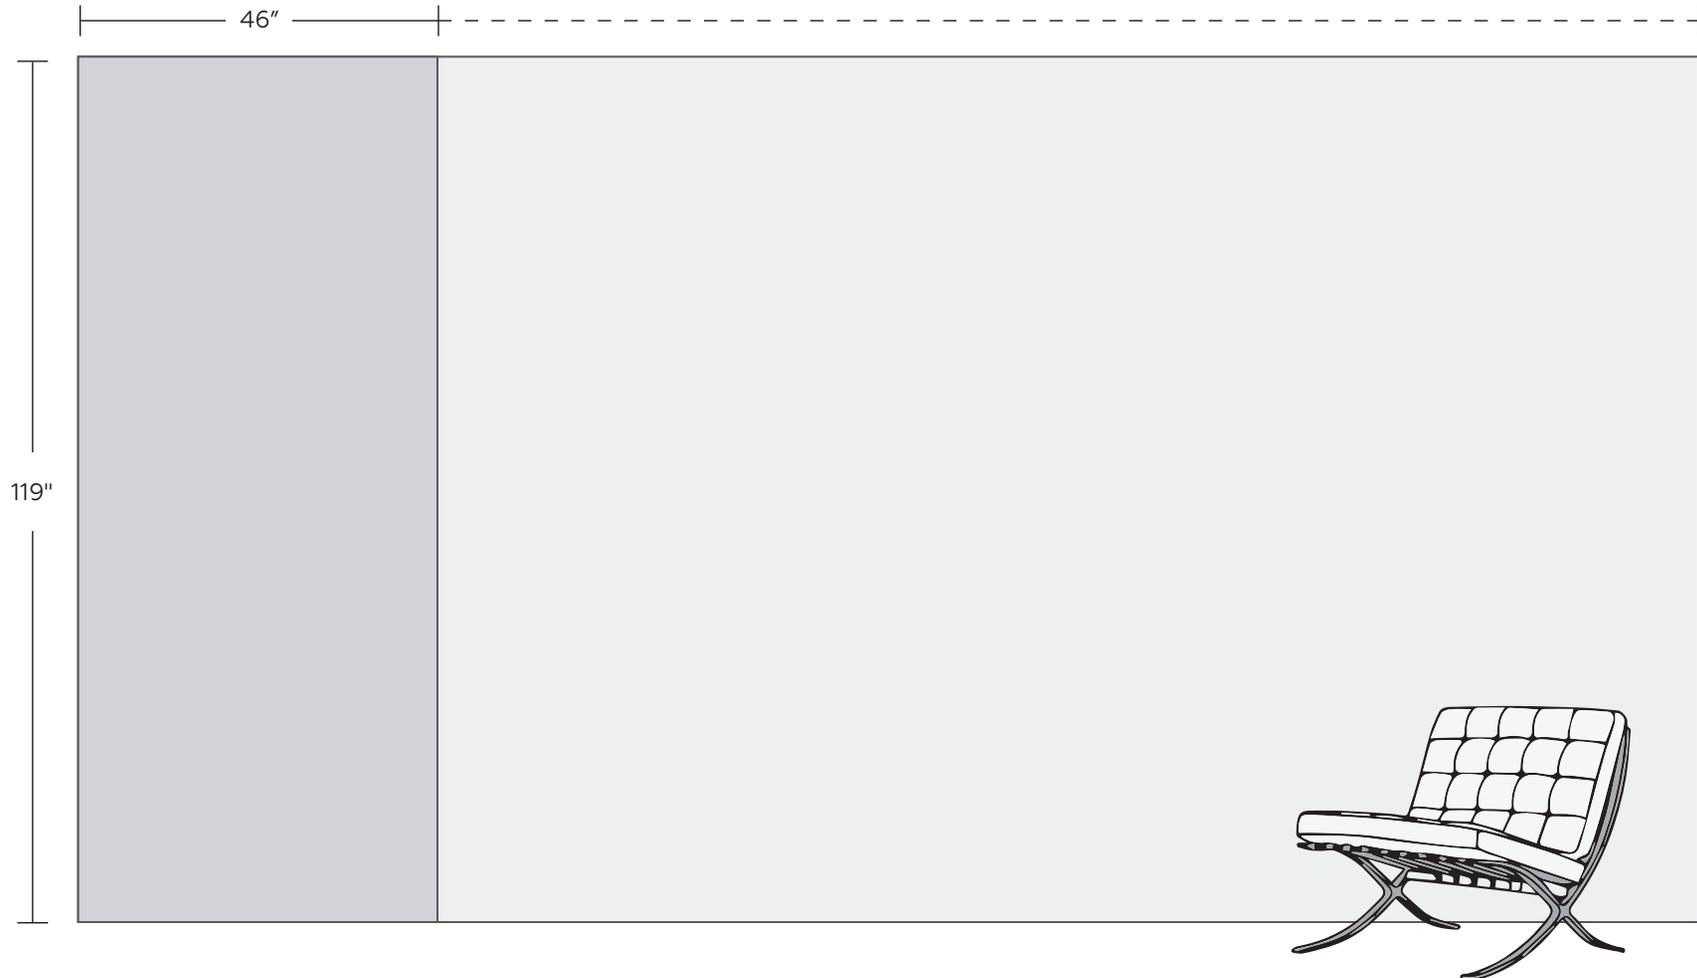



TECHNICAL SPECIFICATIONS



Absorption

Standard: .32 NRC;
.5 NRC with acoustic enhancers
(subject to mounting conditions)

Fire Rating

ASTM E84 Class A

Warranty

Two (2) Years

VOC

ASTM D5116 Compliant

Material

PET Felt: 100% polyester fiber

Maintenance

Vacuum clean to remove dust
and debris

Sustainability

MPS 9mm Acoustic Panels
MPS LLC

Final Assembly: Plano, Texas, USA
Life Expectancy: 50 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program (Plano, TX), Recyclable (100%)

Ingredients:
Polyethylene Terephthalate

Living Building Challenge Criteria: Compliant

I-13 Red List:
 LBC Red List Free % Disclosed: 100% at 100ppm
 LBC Red List Approved VOC Content: Not Applicable
 Declared

I-10 Interior Performance: CDPH Standard Method v1 2-2017
I-14 Responsible Sourcing: Not Applicable

MPS-0001
EXP. 01 NOV 2026
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare





COLORS & CUSTOMS

MPS offers a range of standard colors, woodgrains, and custom colors with SHADES.

STANDARD COLORS



WOODGRAINS



SHADES by MPS™

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. We've distilled years of testing into a three-tier system that protects print quality and design intent.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.

RECOMMENDED	GUIDED CUSTOM	BESPOKE
 Signature Series Proven color. Perfect results.	 Studio Collaboration Your color, guided by our expertise.	 The Color Lab When your color needs to be one-of-a-kind.



MOUNTING OPTIONS

TOOLS REQUIRED



Cutting tool



Steel straightedge



Drill




Hole saw



Construction adhesive

DRY FIT

Before applying adhesive, dry fit the first panel to the wall.

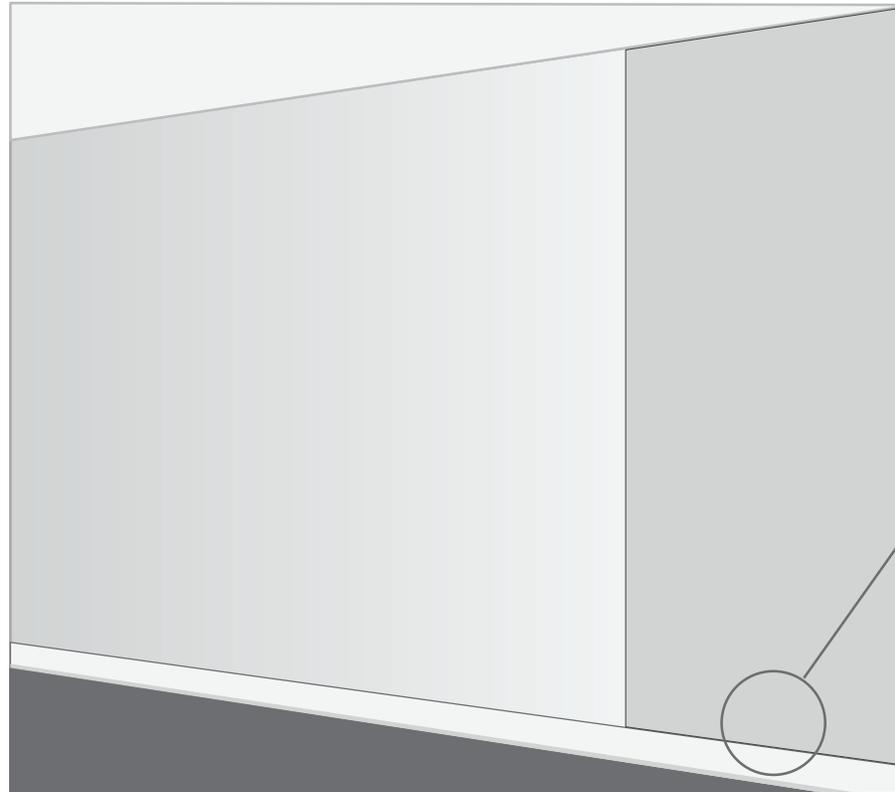


Note: to avoid irregularity, we recommend applying to the top of a baseboard.



MOUNTING OPTIONS

APPLY CONSTRUCTION ADHESIVE (RECOMMENDED)

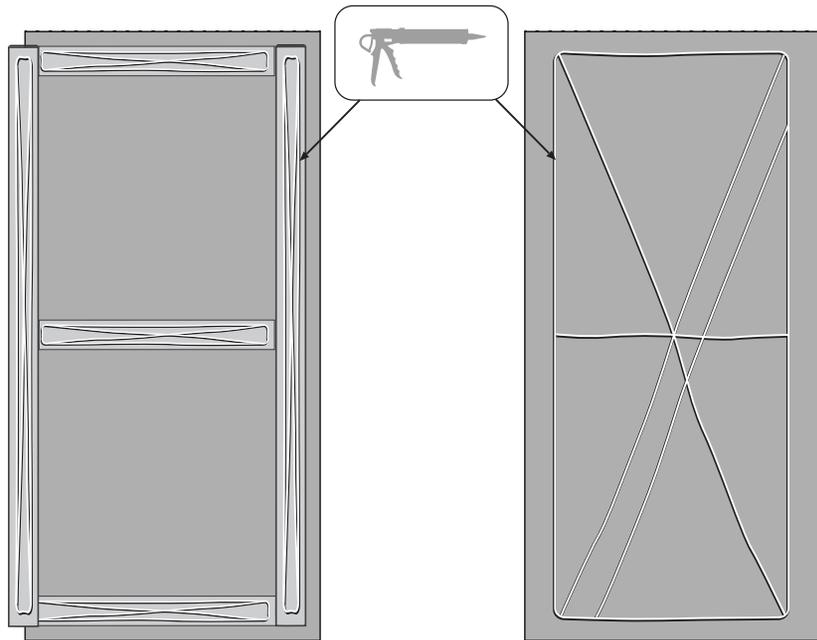


With acoustic enhancers


Without acoustic enhancers

HOOK Z-CLIPS (ALTERNATIVE)

Determine the desired position of z-clips and screw them into the back of the panel.

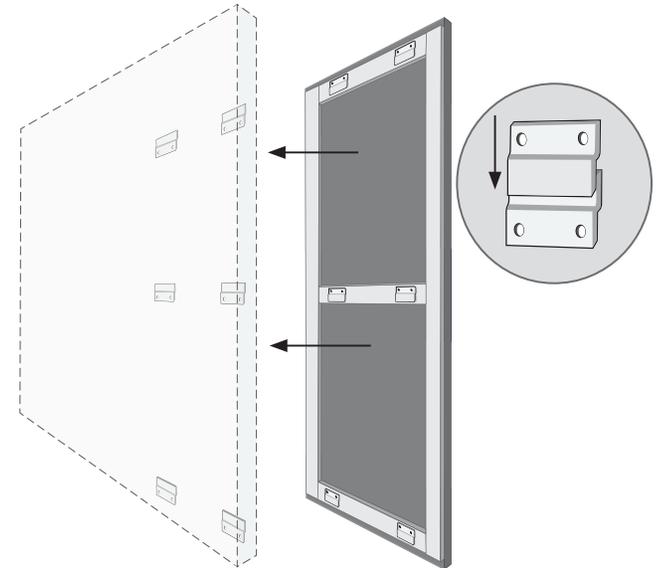


TRIM AS REQUIRED



Trim panels along the end to fit using a straight edge and cutting tool.

TRIMMING HOLES



When cutting a circular hole use a hole saw, and run it backwards to minimize pulling.