



# RUMUR

felt wall






# HOW TO SPECIFY

Rumur acoustic panels are flat wall-mounted geometric shapes that provide beautiful inspirational energy, reflecting the colors of the workspace, while providing significant sound absorbing benefits.

## 01 SPECS

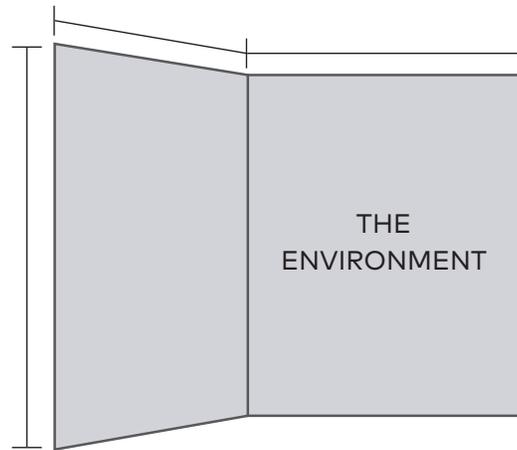

Tell us about your space, the design, and dimensions.

## 02 SHAPE



SQUARE



RECTANGLE


What shape does your design call for? Square, rectangle, or both?

## 03 COLORS



Standard. Woodgrains. Customs. What's your color? (See page 6)

## 04 MAKE IT YOUR OWN!

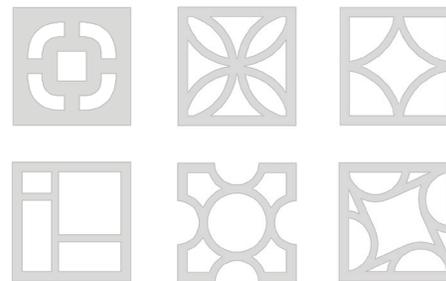

Choose one of our patterns or spec your own. (See page 4)

## SHADES by MPS™



Even more color options with SHADES by MPS. (See page 6)




# PRODUCT SPECIFICATIONS

## STANDARD DIMENSIONS

Standard Square       $7 \frac{3}{4}'' \times 7 \frac{3}{4}''$  and  $11 \frac{3}{4}'' \times 11 \frac{3}{4}''$

Standard Rectangle       $7 \frac{3}{4}'' \times 15 \frac{1}{2}''$  and  $11 \frac{3}{4}'' \times 23 \frac{1}{2}''$

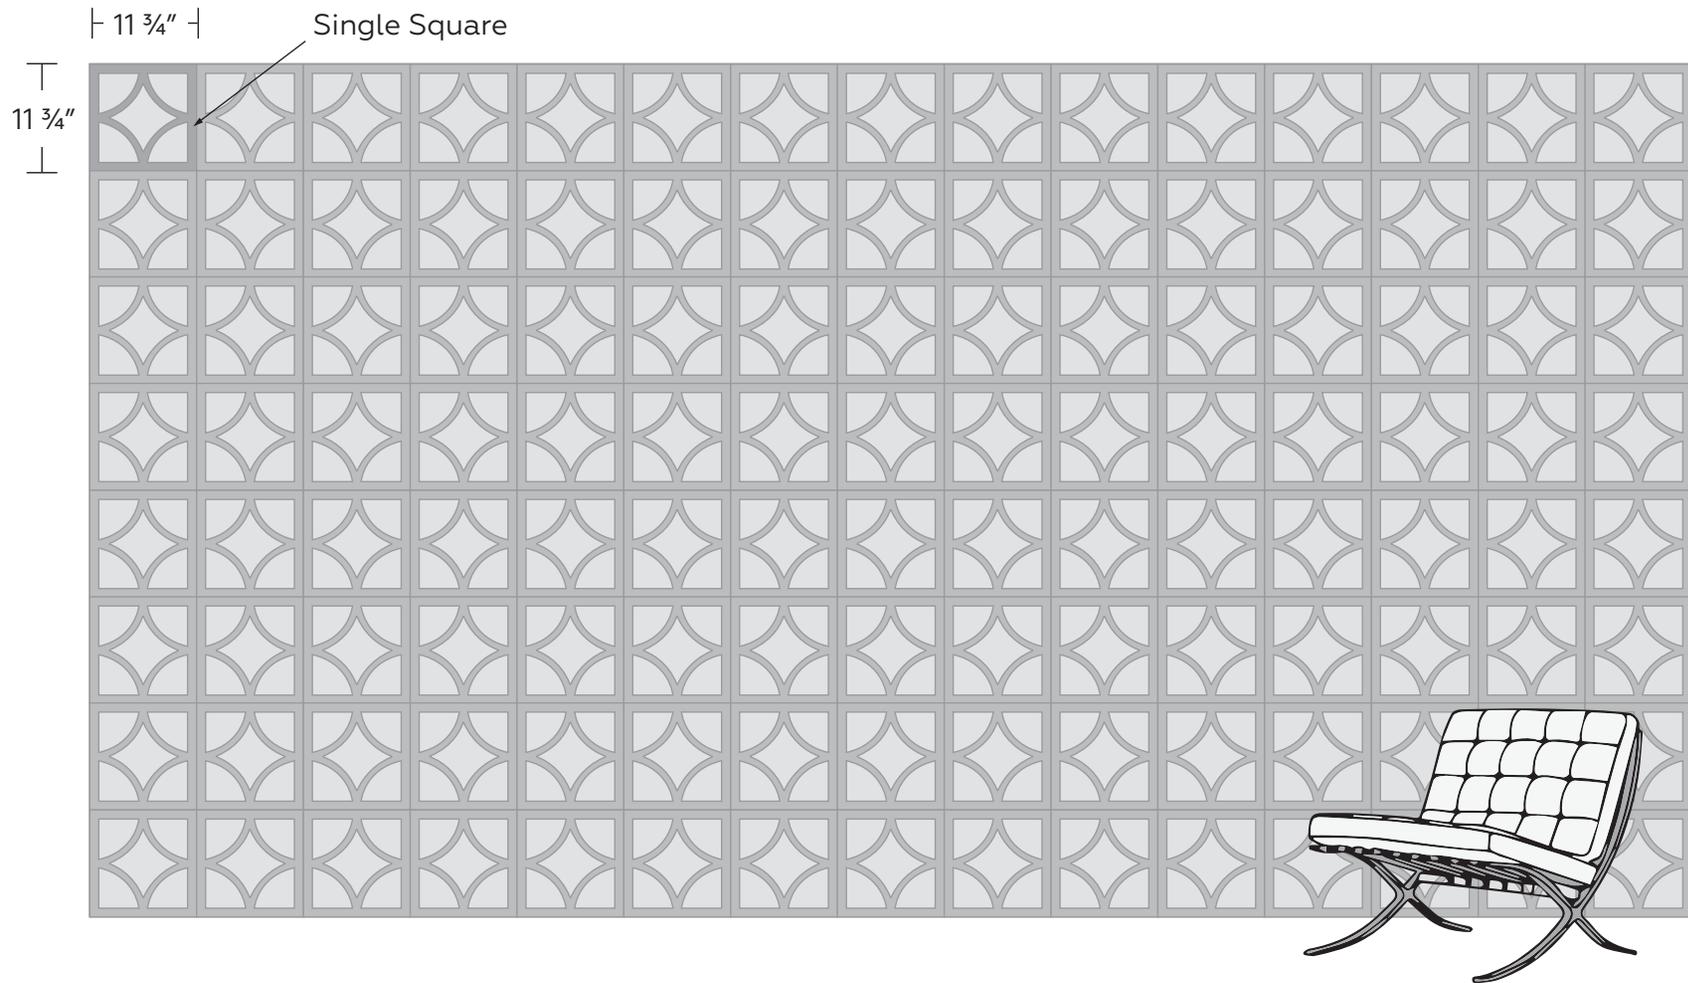



# PRODUCT SPECIFICATIONS

## DESIGNS

Rumur comes in nine square and nine rectangle designs, or customize your Rumur with your own design.

### Square



1S Tao



2S Petal



3S Kiss



4S Hop



5S Star



6S Stack



7S Bloom




8S Spin



9S Current


### Rectangle




1L Tao



2L Petal



3L Kiss



4L Hop



5L Star




6L Stack



7L Bloom



8L Spin



9L Current



# TECHNICAL SPECIFICATIONS



## Absorption

Standard: .85 NRC

(subject to mounting conditions)

## Fire Rating

ASTM E84 Class A

## Warranty

Two (2) Years

## VOC

ASTM D5116 Compliant

## Material

PET Felt: 100% polyester fiber

## Maintenance

Vacuum clean to remove dust and debris

## Sustainability



**MPS 9mm Acoustic Panels**  
**MPS LLC**

**Final Assembly:** Plano, Texas, USA  
**Life Expectancy:** 50 Year(s)  
**End of Life Options:** Salvageable/Reusable in its Entirety, Take Back Program (Plano, TX), Recyclable (100%)

**Ingredients:**  
Polyethylene Terephthalate

**Living Building Challenge Criteria:** Compliant

**I-13 Red List:**  
 LBC Red List Free      % Disclosed: 100% at 100ppm  
 LBC Red List Approved      VOC Content: Not Applicable  
 Declared

**I-10 Interior Performance:** CDPH Standard Method v1 2-2017  
**I-14 Responsible Sourcing:** Not Applicable

MPS-0001  
EXP. 01 NOV 2026  
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)





# COLORS & WOODGRAINS

MPS offers a range of standard colors, woodgrains, and custom colors with SHADES.

## STANDARD COLORS



## WOODGRAINS



## SHADES by MPS™

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. We've distilled years of testing into a three-tier system that protects print quality and design intent.

\*Some limitations apply. Consult your MPS acoustics expert to discuss your project.

RECOMMENDED	GUIDED CUSTOM	BESPOKE
<p><b>Signature Series</b></p> <p>Proven color. Perfect results.</p>	<p><b>Studio Collaboration</b></p> <p>Your color, guided by our expertise.</p>	<p><b>The Color Lab</b></p> <p>When your color needs to be one-of-a-kind.</p>



# MOUNTING OPTIONS

## TOOLS REQUIRED



Cutting tool



Steel straightedge



Drill




Hole saw



Construction adhesive

## DRY FIT

Before applying adhesive, dry fit the first panel to the wall.

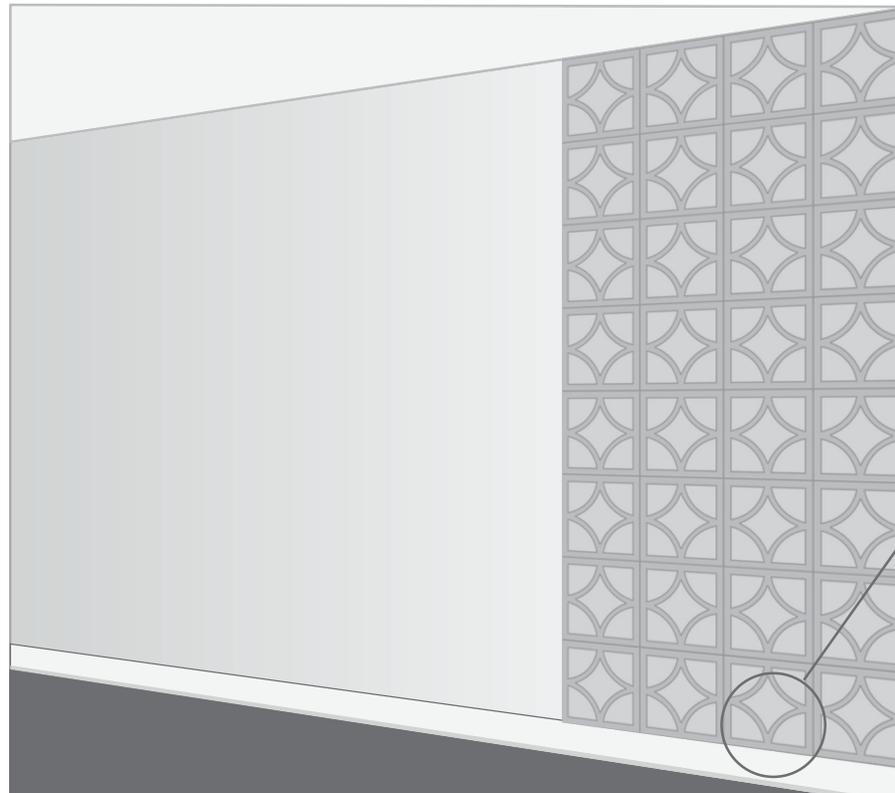


Note: to avoid irregularity, we recommend applying to the top of a baseboard.




# MOUNTING OPTIONS

## APPLY CONSTRUCTION ADHESIVE (RECOMMENDED)

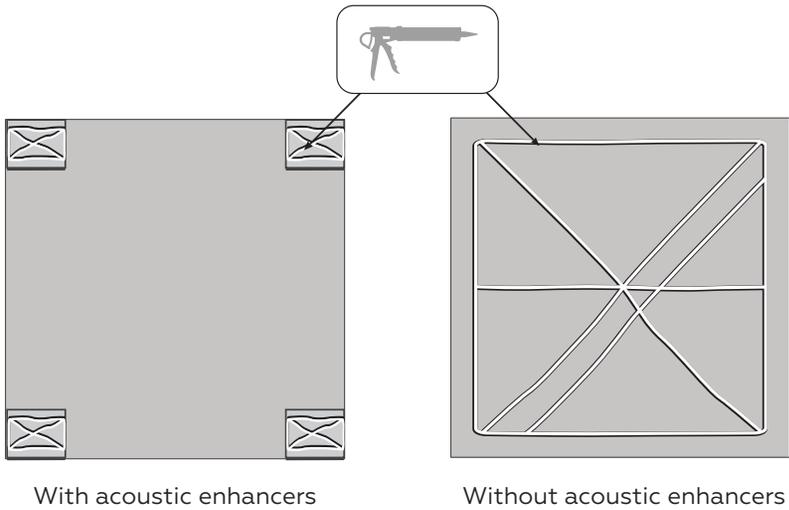

ACOUSTIC  
ENHANCERS

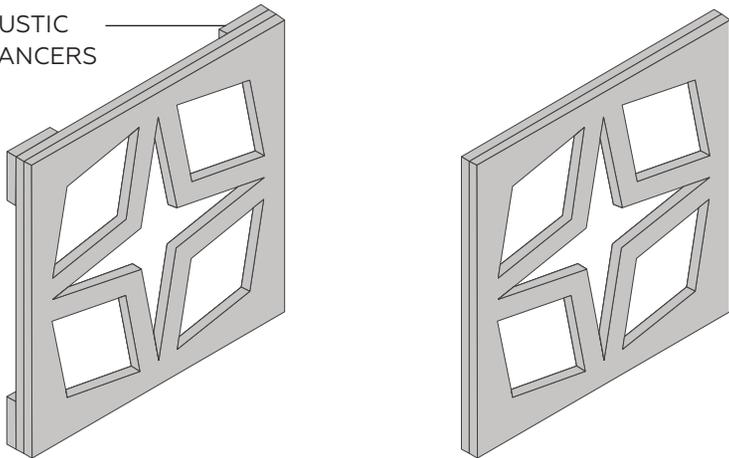

## HOOK Z-CLIPS (ALTERNATIVE)

Determine the desired position of z-clips and screw them into the back of the panel.

