



STRAIGHT

felt ceiling baffle






HOW TO SPECIFY

Straight acoustic baffles are single thick and have been designed to complement any space with a clean design style and visual appeal. Each baffle is precision cut and formed to exacting specifications.

01 SPECS

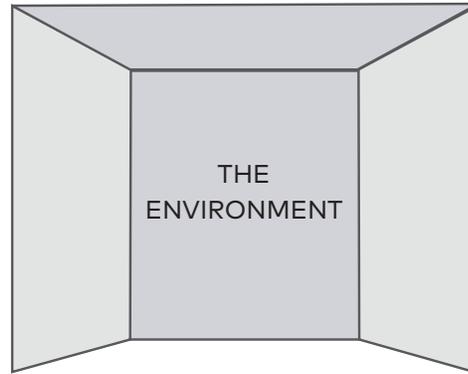


Tell us about your space, the design, and dimensions.

02 COLORS



Standard. Woodgrains. Customs. What's your color? (See page 6)

03 MAKE IT YOUR OWN!

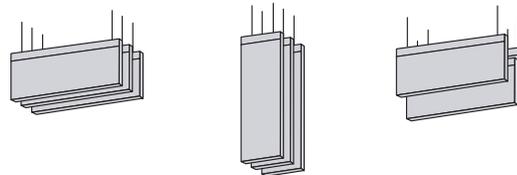

Spec your own configuration. Customize orientation, angles, heights, etc.

SHADES by MPS™



Even more color options with SHADES by MPS. (See page 6)



PRODUCT SPECIFICATIONS


CUSTOM BAFFLE DIMENSIONS

Variable Length	24" - 119"L
Standard	7 3/4"H or 11 3/4"H
Felt Thickness	3/8"

*Custom heights and widths available

- Mounting hardware is modular and designed to mount anywhere on the baffle
- Up to 36" between mounting locations is recommended
- Compatible with 9/16" (twist clips) and 15/16" t-grids (provided by others)

PROFILE

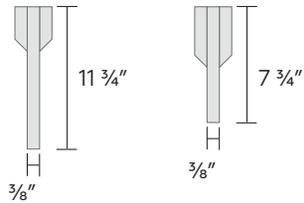

ELEVATION




CUSTOM OPTIONS

- Trak your Straight baffle. Apply Trak ridges to your Straight for a textured look.
- Apply a reveal colorway to your Trak'd Straight. *See mpsacoustics.com/color for colorway options
- Customize the edges of your Straight. Get them squared or spec your own end shape.

*Unlimited options with 30 or 45° v-cuts



Trak ridges

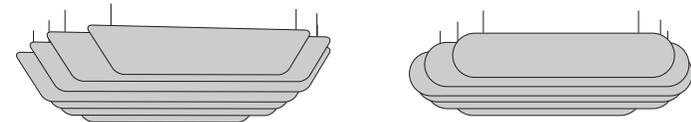

Custom end shapes




PRODUCT SPECIFICATIONS

CONTINUOUS BAFFLE

Need Straight to span a larger space?

Connect multiple baffles to make it look like one, long, continuous baffle.

DOVETAIL

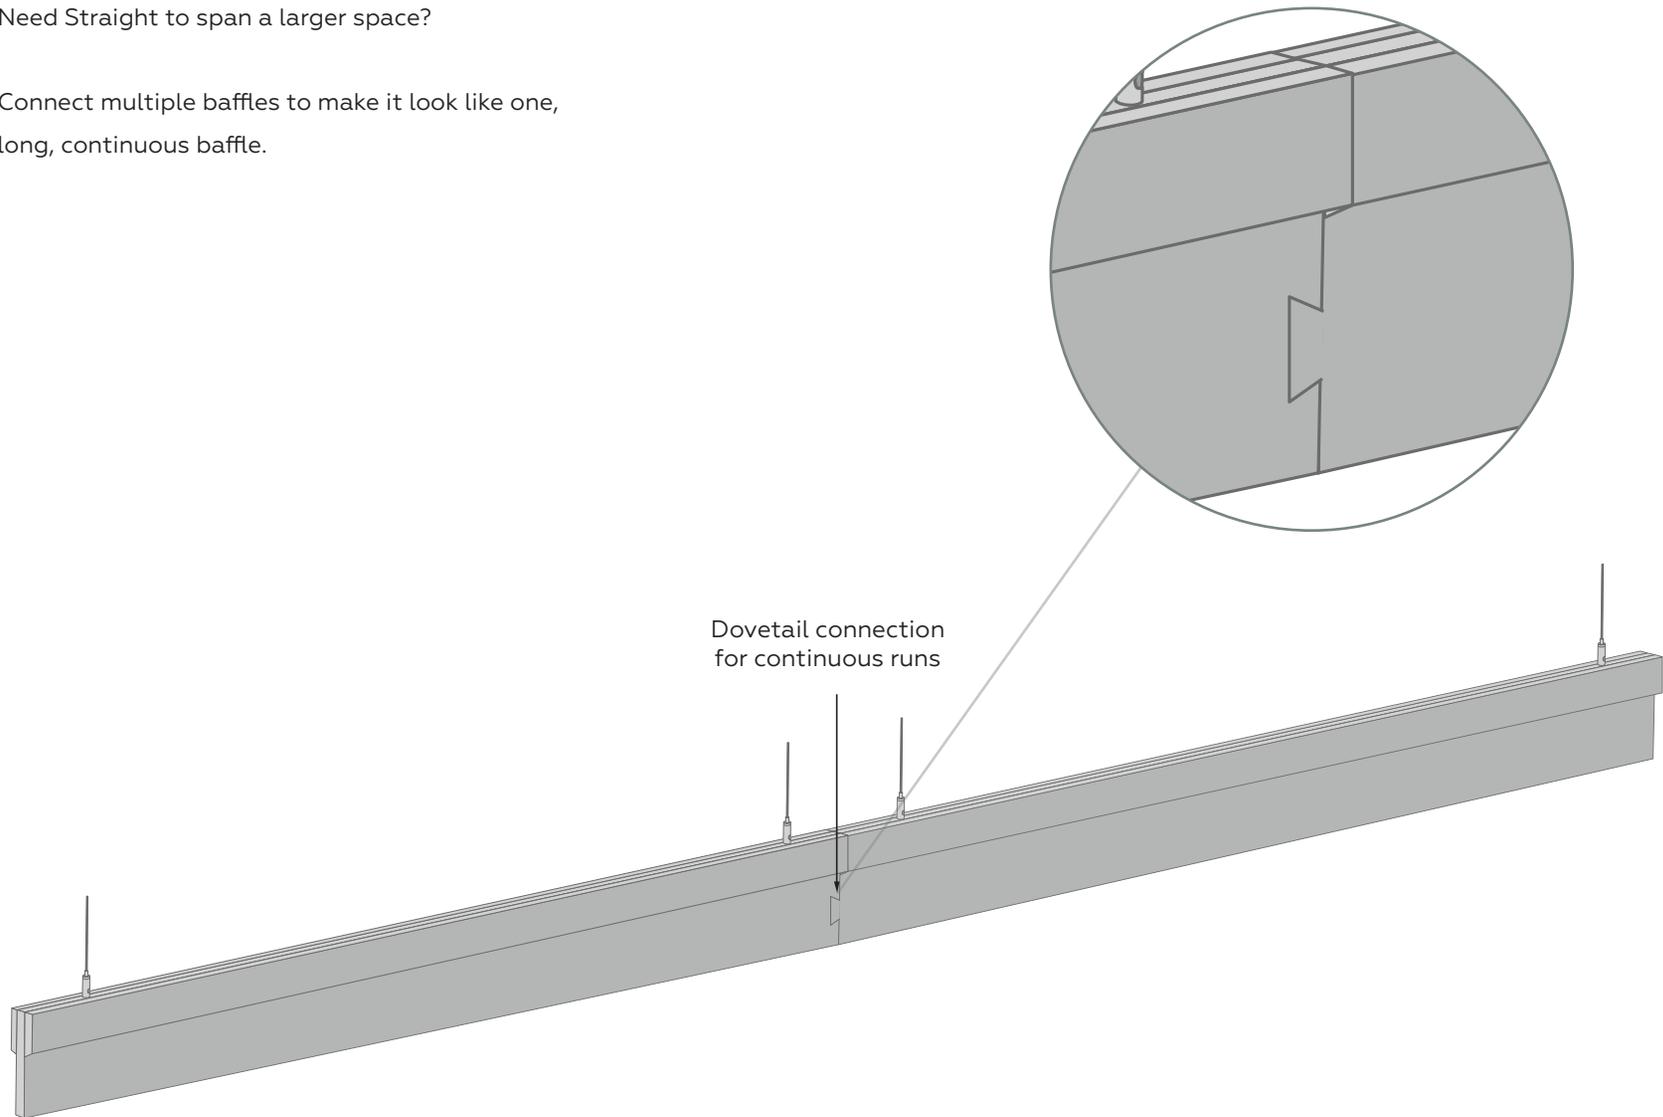



TECHNICAL SPECIFICATIONS



Absorption

Standard: .75-1.15 NRC

Recommend spacing
for max NRC: 6-12"

Fire Rating

ASTM E84 Class A

Warranty

Two (2) Years

VOC

ASTM D5116 Compliant

Material

PET Felt: 100% polyester fiber

Maintenance

Vacuum clean to remove dust
and debris

Sustainability



MPS 9mm Acoustic Panels
MPS LLC

Final Assembly: Plano, Texas, USA
Life Expectancy: 50 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program (Plano, TX), Recyclable (100%)

Ingredients:
Polyethylene Terephthalate

Living Building Challenge Criteria: Compliant

I-13 Red List:
 LBC Red List Free % Disclosed: 100% at 100ppm
 LBC Red List Approved VOC Content: Not Applicable
 Declared

I-10 Interior Performance: CDPH Standard Method v1 2-2017
I-14 Responsible Sourcing: Not Applicable

MPS-0001
EXP. 01 NOV 2026
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare





COLORS & WOODGRAINS

MPS offers a range of standard colors, woodgrains, and custom colors with SHADES.

STANDARD COLORS



WOODGRAINS



SHADES by MPS™

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. We've distilled years of testing into a three-tier system that protects print quality and design intent.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.

RECOMMENDED	GUIDED CUSTOM	BESPOKE
<p>Signature Series</p> <p>Proven color. Perfect results.</p>	<p>Studio Collaboration</p> <p>Your color, guided by our expertise.</p>	<p>The Color Lab</p> <p>When your color needs to be one-of-a-kind.</p>




MOUNTING OPTIONS

GRIDFIT CONNECT

Connect Straight baffles to t-grid with zero hardware.

Hook to the t-grid with the GridFit notches on the top of each baffle.

GRIDFIT

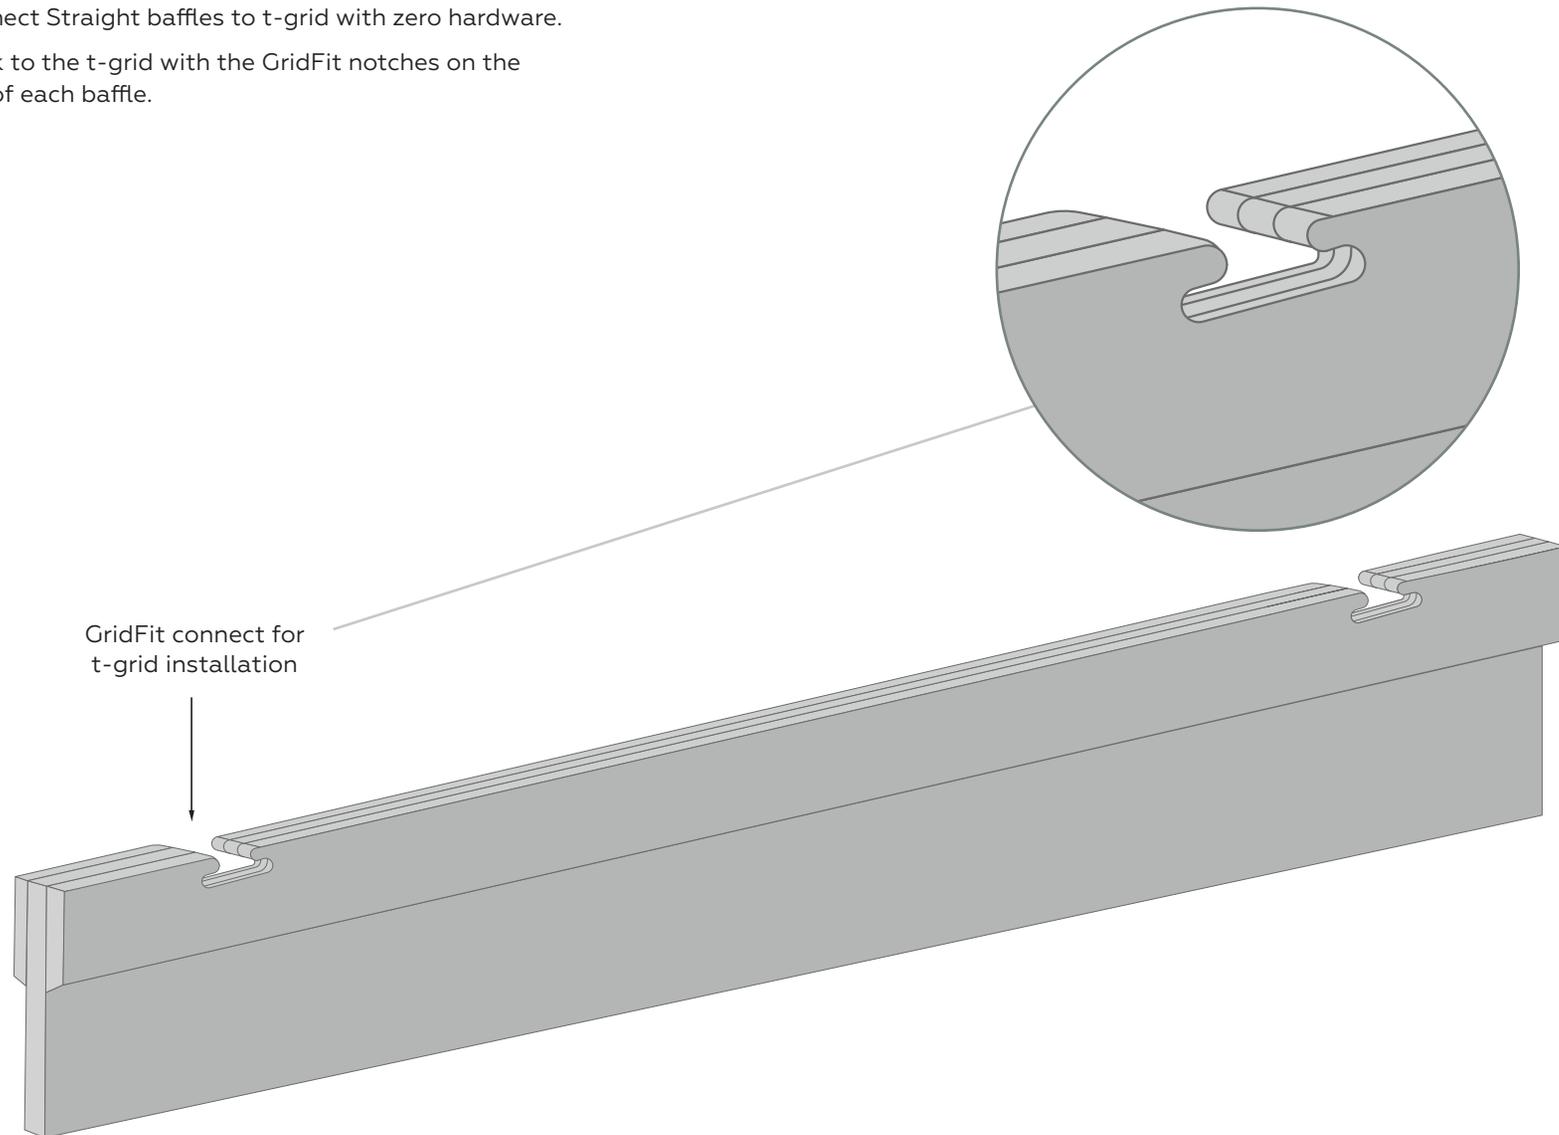




MOUNTING OPTIONS

MOUNTING ON 15/16" T-GRID



Straight is intended for "On Grid" or "T-Bar Ceiling" mounting and is to be installed with magnets, twist clips, or cable grippers. See details for each mounting option below.

MAGNETS

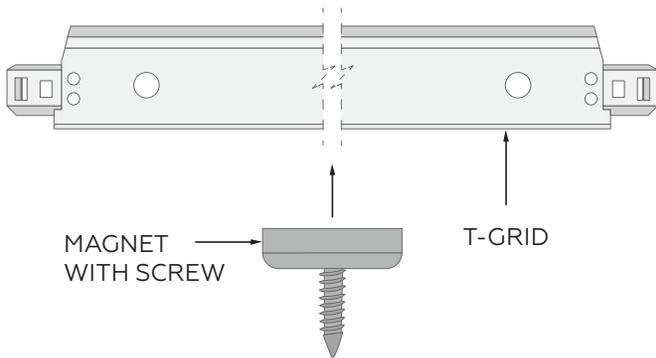

DETAIL

MAGNET
HARDWARE TO
ATTACH BAFFLE
TO 15/16" T-GRID

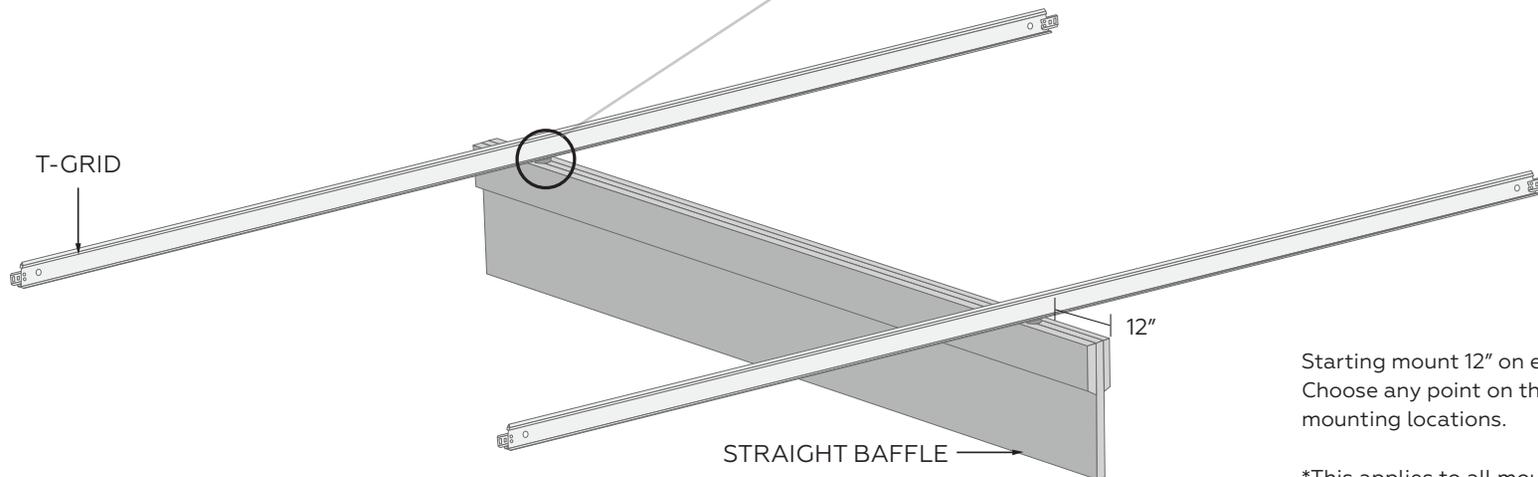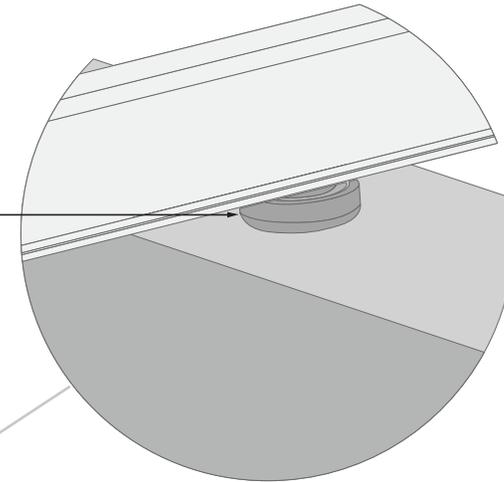

Starting mount 12" on either side.
Choose any point on the baffle for additional
mounting locations.


*This applies to all mounting options



MOUNTING OPTIONS

TWIST CLIPS


Compatible with 9/16" and 15/16" t-grids.

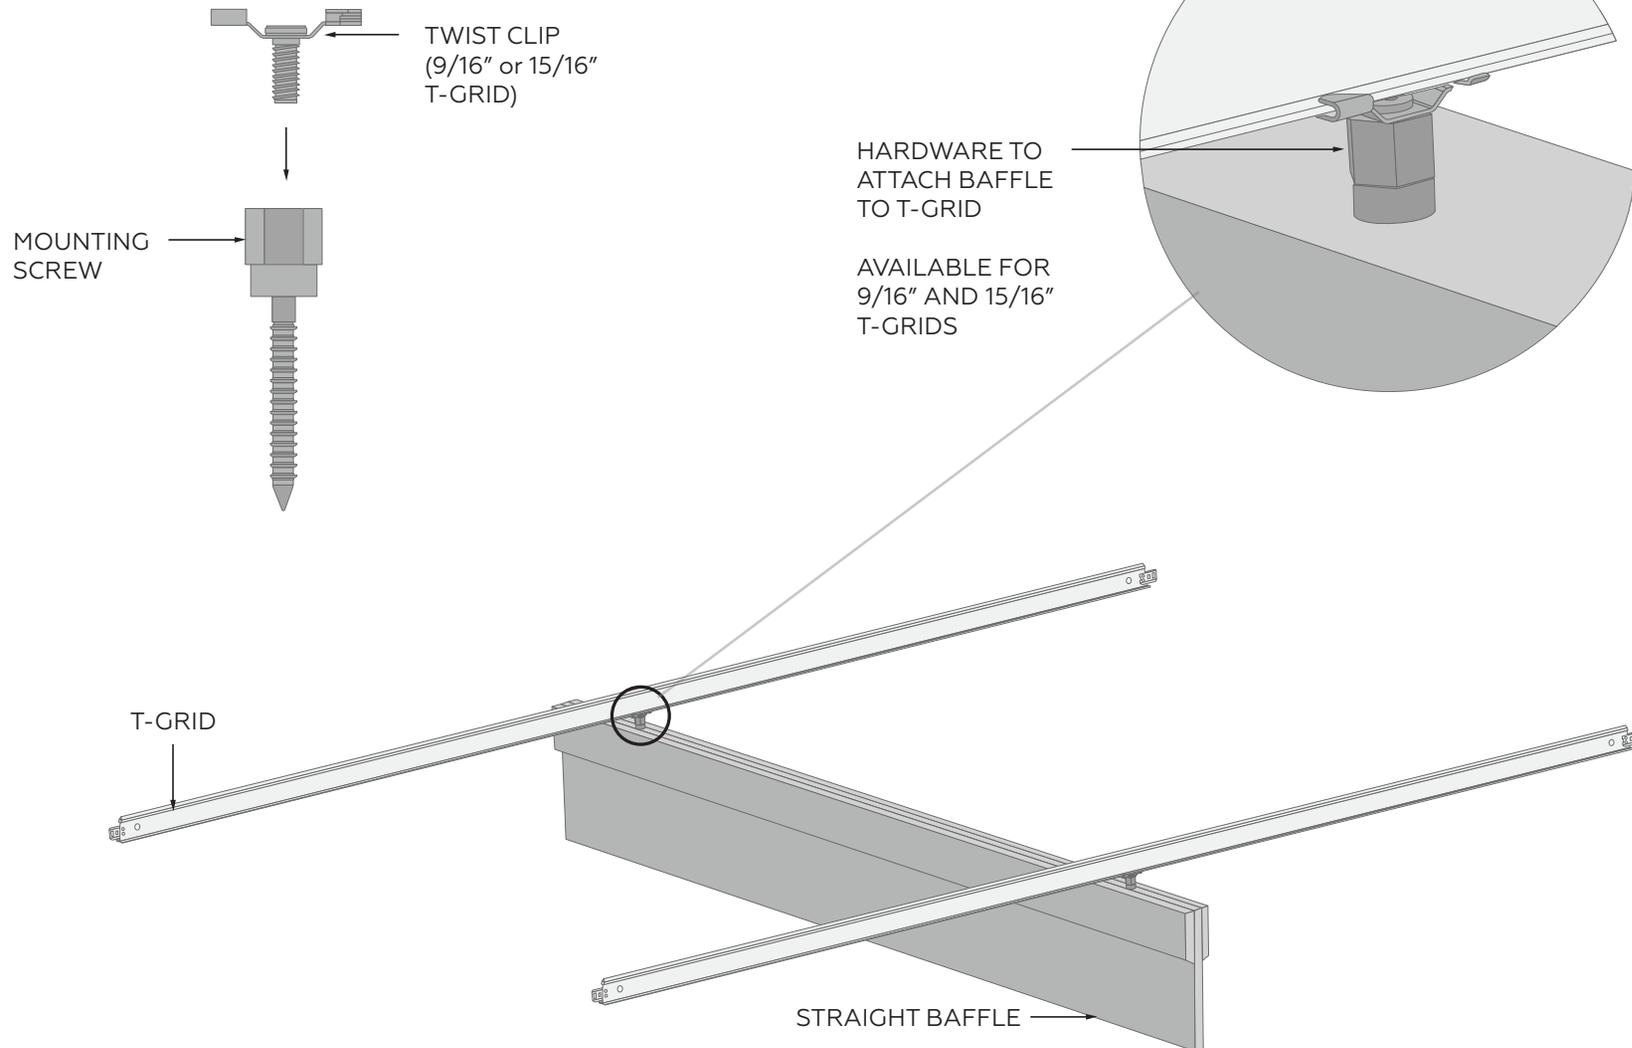



MOUNTING OPTIONS

CABLE GRIPPERS

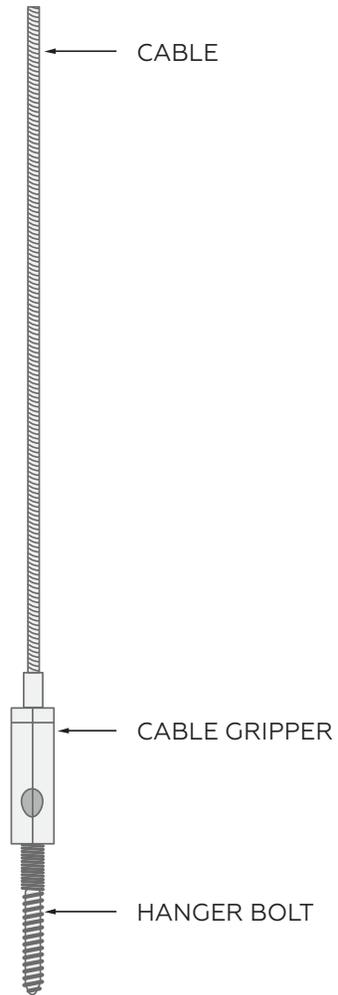

DETAIL

