WEAVE

felt wall

MPS™

HOW TO SPECIFY

Weave channels elegance through subtle motion. With a pattern of flowing V-cut lines that curve gently across each panel, Weave adds a graceful rhythm to walls, creating visual movement that softens and uplifts the environment. Its refined lines offer a calm, architectural texture while delivering reliable acoustic performance, perfect for spaces where fluid design meets quiet intention.

01 SPECS

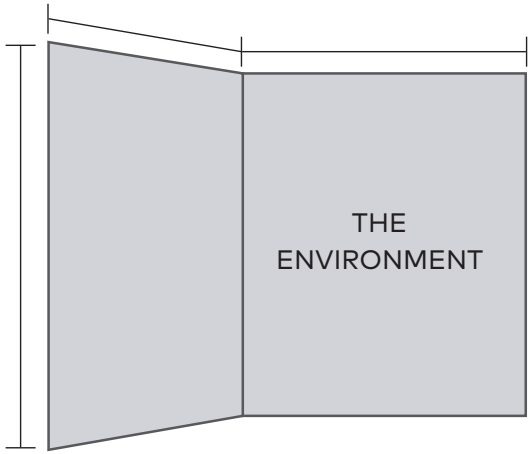

Tell us about your space, the design, and dimensions.

02 COLORWAYS

Over 50 standard colorways. What's your color?

03 PATTERN OPTIONS



SMALL



LARGE

Weave is offered in two pattern sizes, small and large.

04 MAKE IT YOUR OWN!

SHADES by MPS

- Signature Series
- Studio Collaboration
- The Color Lab

Even more color options with SHADES by MPS. (See page 6)

PRODUCT SPECIFICATIONS

STANDARD DIMENSIONS

Single Panel	23″W x 119″H
Felt Thickness	⅜″

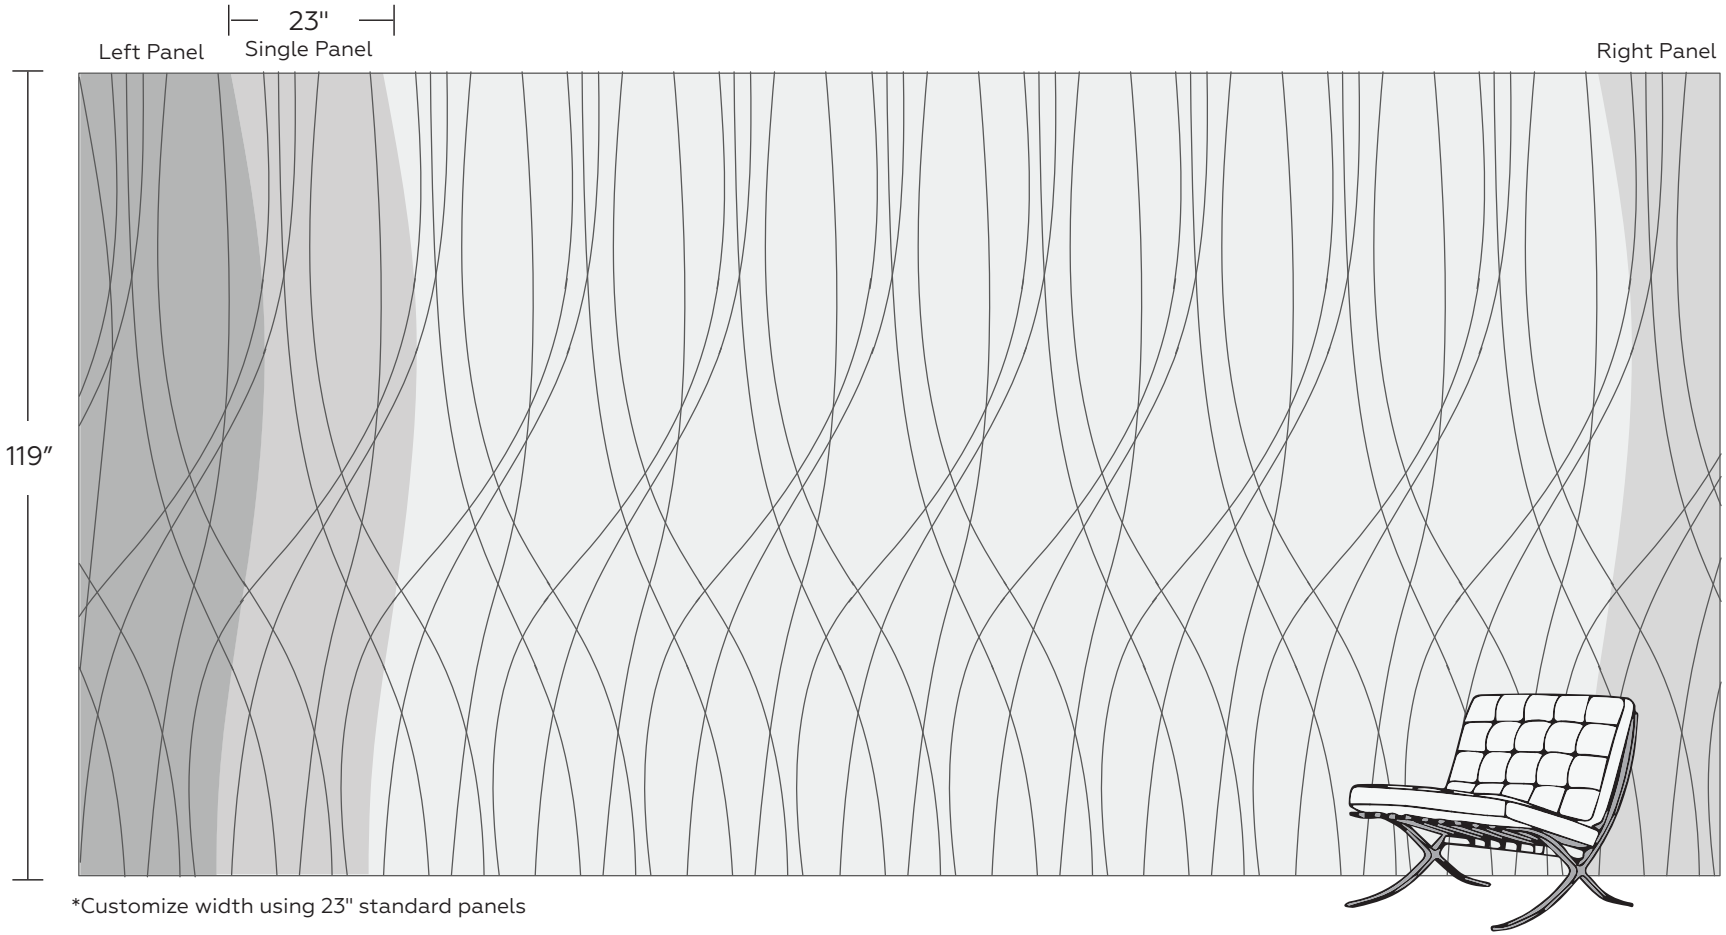

*Customize width using 23" standard panels

TECHNICAL SPECIFICATIONS

Absorption

Standard: .32 NRC

(subject to mounting conditions)

Fire Rating

ASTM E84 Class A

Warranty

Two (2) Years

VOC

ASTM D5116 Compliant

Material

PET Felt: 100% polyester fiber

Maintenance

Vacuum clean to remove dust and debris

Sustainability

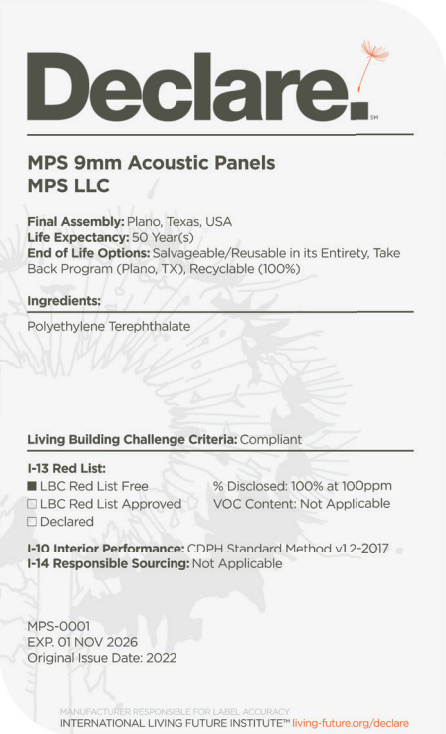

Declare.

MPS 9mm Acoustic Panels
MPS LLC

Final Assembly: Plano, Texas, USA
Life Expectancy: 50 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Take Back Program (Plano, TX), Recyclable (100%)

Ingredients:

Polyethylene Terephthalate

Living Building Challenge Criteria: Compliant

I-13 Red List:
■ LBC Red List Free
☐ LBC Red List Approved
☐ Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance: CDPH Standard Method v1.2-2017
I-14 Responsible Sourcing: Not Applicable

MPS-0001
EXP. 01 NOV 2026
Original Issue Date: 2022

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

COLORS

MPS offers a range of over 50 curated colorways and woodgrains

CURATED COLORWAYS

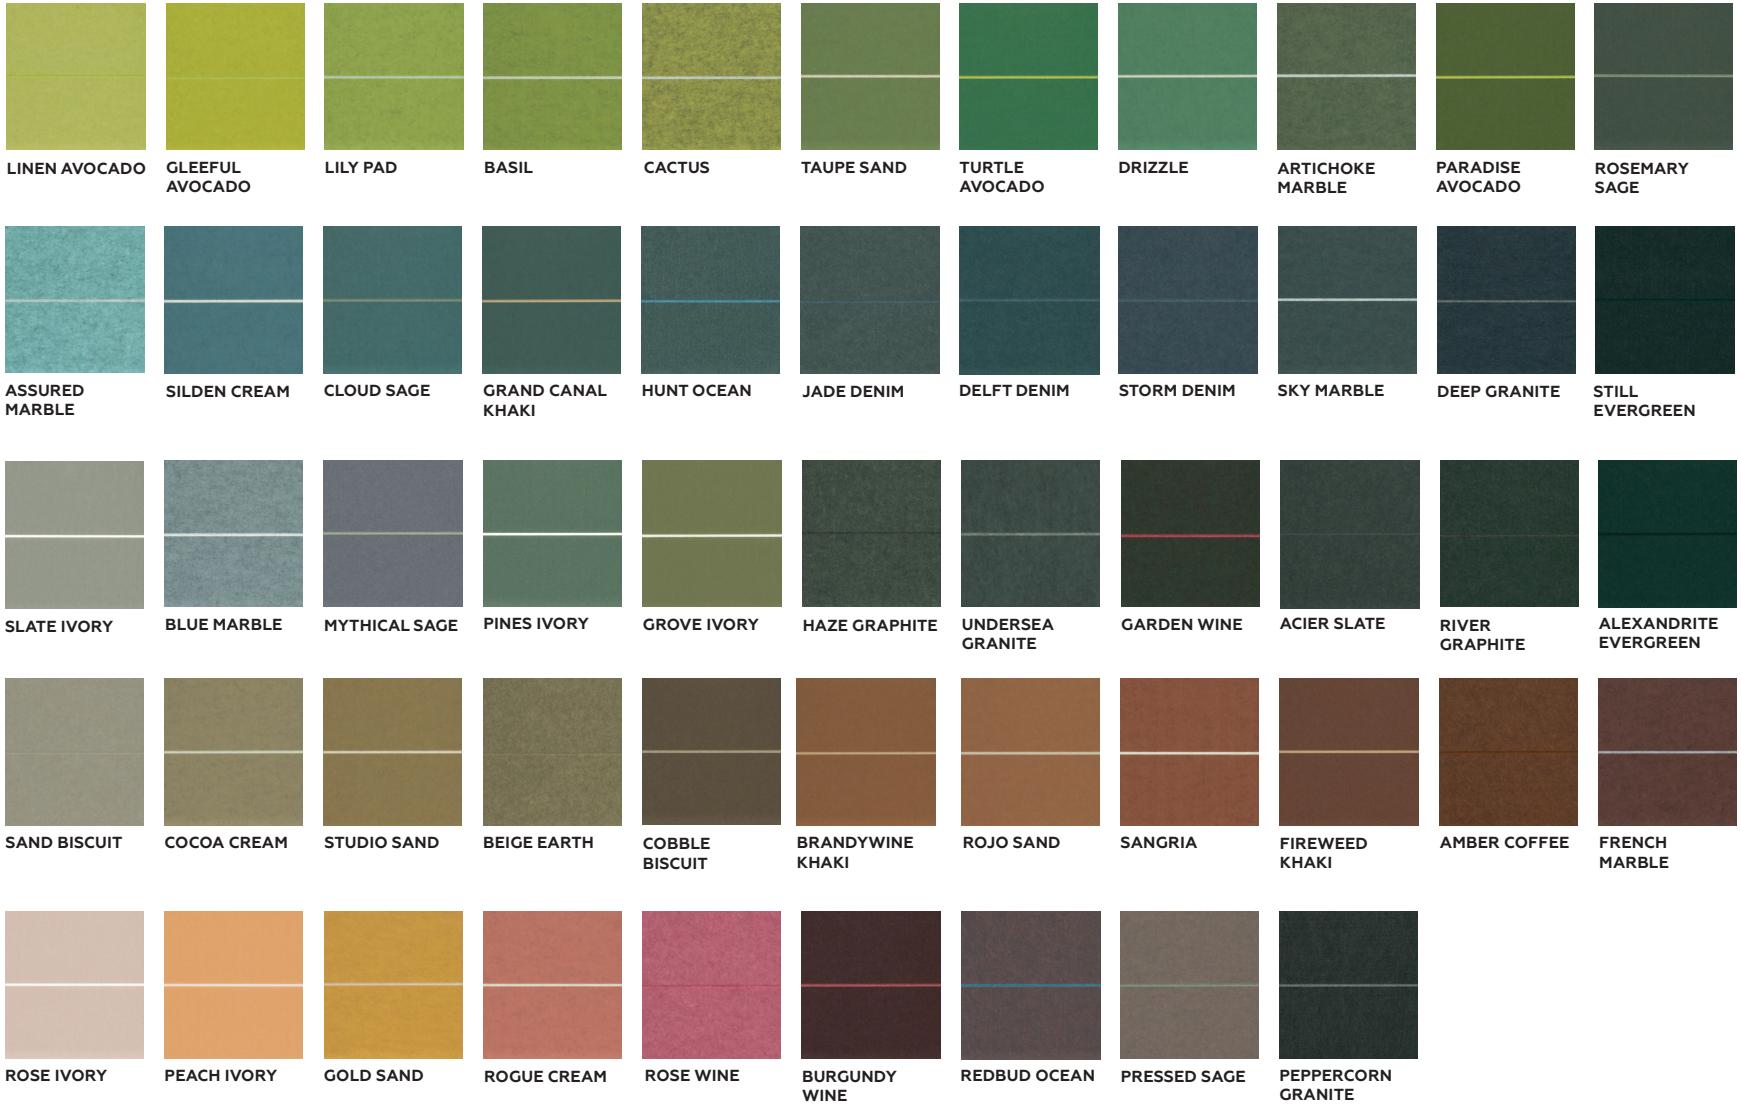

COLORS

WOODGRAINS

PLYWOOD | PLANCHE OAK | AGED ASH | HONEY | ASH | WEATHERED TEAK | ITALIAN WALNUT | WARM ASH | MAIN STREET ELM | VISTA WALNUT | DARK WALNUT

SHADES by MPS™

Your design world revolves around color, so don't be limited by standard colors and outdated palettes. We've distilled years of testing into a three-tier system that protects print quality and design intent.

*Some limitations apply. Consult your MPS acoustics expert to discuss your project.

RECOMMENDED

Signature Series

Proven color.
Perfect results.

GUIDED CUSTOM

Studio Collaboration

Your color, guided by our expertise.

BESPOKE

The Color Lab

When your color needs to be one-of-a-kind.

INSTALLATION OVERVIEW

SEE INSTALL GUIDE FOR DETAILED STEPS

TOOLS REQUIRED

Cutting tool

Steel straightedge

Drill

Hole saw

Construction adhesive

DRY FIT

Before applying adhesive, dry fit the first panel to the wall.

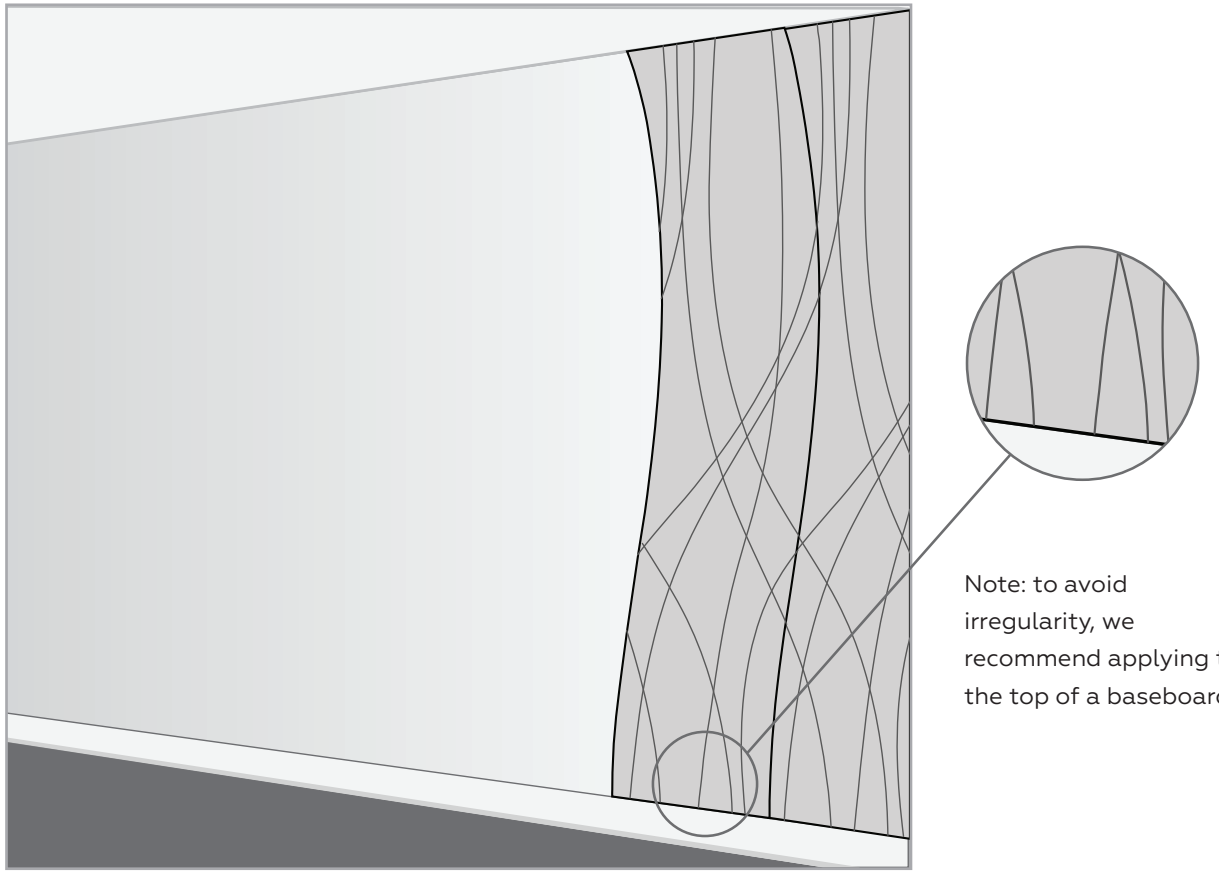

Note: to avoid irregularity, we recommend applying to the top of a baseboard.

INSTALLATION OVERVIEW

APPLY CONSTRUCTION ADHESIVE

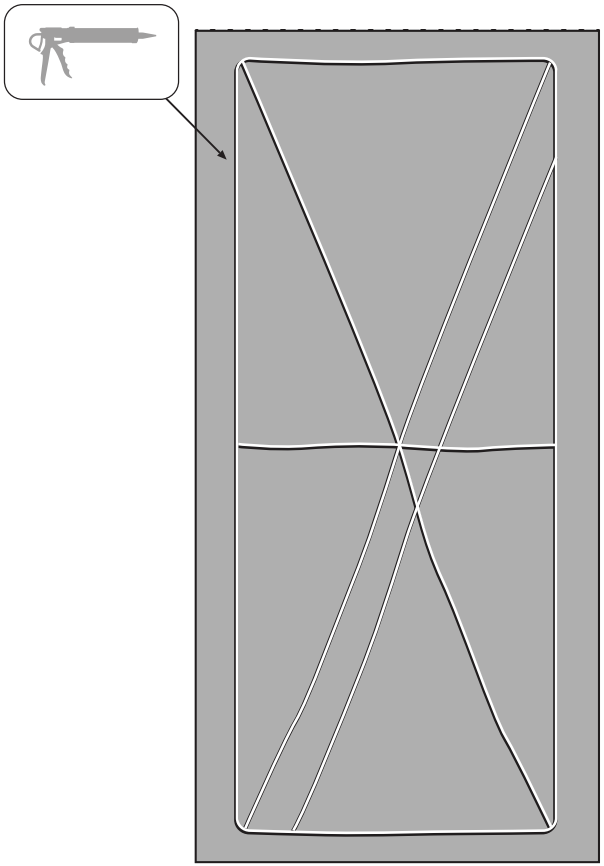

BACK OF PANEL

TRIM AS REQUIRED



Trim panels along the end to fit using a straight edge and cutting tool.

TRIMMING HOLES



When cutting a circular hole use a hole saw, and run it backwards to minimize pulling.